

Solution Deployment Descriptor Specification 1.0

4 OASIS Standard

5 1 September 2008

6 7 8 9 10	Specification URIs: This Version: http://docs.oasis-open.org/sdd/v1.0/os/sdd-spec-v1.0-os.html http://docs.oasis-open.org/sdd/v1.0/os/sdd-spec-v1.0-os.doc http://docs.oasis-open.org/sdd/v1.0/os/sdd-spec-v1.0-os.pdf
11 12 13 14	Previous Version: http://docs.oasis-open.org/sdd/v1.0/cs01/sdd-spec-v1.0-cs01.html http://docs.oasis-open.org/sdd/v1.0/cs01/sdd-spec-v1.0-cs01.doc http://docs.oasis-open.org/sdd/v1.0/cs01/sdd-spec-v1.0-cs01.pdf
15 16 17 18	Latest Version: http://docs.oasis-open.org/sdd/v1.0/sdd-spec-v1.0.html http://docs.oasis-open.org/sdd/v1.0/sdd-spec-v1.0.doc http://docs.oasis-open.org/sdd/v1.0/sdd-spec-v1.0.pdf
19 20	Technical Committee: OASIS Solution Deployment Descriptor (SDD) TC
21 22	Chair(s): Brent Miller, IBM Corporation
23 24 25 26	Editor(s): Julia McCarthy, IBM Corporation Robert Dickau, Macrovision Corporation Merri Jensen, SAS Institute, Inc.
27 28	Related work: None
29 30 31 32	Declared XML Namespace(s): sdd-common=http://docs.oasis-open.org/sdd/ns/common sdd-pd=http://docs.oasis-open.org/sdd/ns/packageDescriptor sdd-dd=http://docs.oasis-open.org/sdd/ns/deploymentDescriptor
33 34 35 36 37 38 39 40	Abstract: This specification defines schema for two XML document types: Package Descriptors and Deployment Descriptors. Package Descriptors define characteristics of a package used to deploy a solution. Deployment Descriptors define characteristics of the content of a solution package, including the requirements that are relevant for creation, configuration and maintenance of the solution content. The semantics of the descriptors are fully defined, allowing software implementations to precisely understand the intent of the descriptor authors and to use the information provided in the descriptors to support solution deployment.

This document was last revised or approved by the OASIS Solution Deployment Descriptor

(SDD) Technical Committee on the above date. The level of approval is also listed above. Check

41

42 43 Status:

44 the "Latest Version" or "Latest Approved Version" location noted above for possible later revisions 45 of this document. 46 Technical Committee members should send comments on this specification to the Technical Committee's email list. Others should send comments to the Technical Committee by using the 47 48 "Send A Comment" button on the Technical Committee's web page at http://www.oasis-49 open.org/committees/sdd/. 50 For information on whether any patents have been disclosed that may be essential to 51 implementing this specification, and any offers of patent licensing terms, please refer to the 52 Intellectual Property Rights section of the Technical Committee web page (http://www.oasisopen.org/committees/sdd/ipr.php. 53 54 The non-normative errata page for this specification is located at http://www.oasisopen.org/committees/sdd/. 55 56

57 Notices

- 58 Copyright © OASIS® 2007, 2008. All Rights Reserved.
- All capitalized terms in the following text have the meanings assigned to them in the OASIS Intellectual Property Rights Policy (the "OASIS IPR Policy"). The full Policy may be found at the OASIS website.
- This document and translations of it may be copied and furnished to others, and derivative works that
- 62 comment on or otherwise explain it or assist in its implementation may be prepared, copied, published,
- and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice
- and this section are included on all such copies and derivative works. However, this document itself may
- not be modified in any way, including by removing the copyright notice or references to OASIS, except as
- 66 needed for the purpose of developing any document or deliverable produced by an OASIS Technical
- 67 Committee (in which case the rules applicable to copyrights, as set forth in the OASIS IPR Policy, must
- 68 be followed) or as required to translate it into languages other than English.
- The limited permissions granted above are perpetual and will not be revoked by OASIS or its successors or assigns.
- 71 This document and the information contained herein is provided on an "AS IS" basis and OASIS
- 72 DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY
- 73 WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY
- 74 OWNERSHIP RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A
- 75 PARTICULAR PURPOSE.
- OASIS requests that any OASIS Party or any other party that believes it has patent claims that would
- 77 necessarily be infringed by implementations of this OASIS Committee Specification or OASIS Standard,
- 78 to notify OASIS TC Administrator and provide an indication of its willingness to grant patent licenses to
- such patent claims in a manner consistent with the IPR Mode of the OASIS Technical Committee that
- 80 produced this specification.

101

- OASIS invites any party to contact the OASIS TC Administrator if it is aware of a claim of ownership of
- 82 any patent claims that would necessarily be infringed by implementations of this specification by a patent
- 83 holder that is not willing to provide a license to such patent claims in a manner consistent with the IPR
- 84 Mode of the OASIS Technical Committee that produced this specification. OASIS may include such
- 85 claims on its website, but disclaims any obligation to do so.
- 86 OASIS takes no position regarding the validity or scope of any intellectual property or other rights that
- 87 might be claimed to pertain to the implementation or use of the technology described in this document or
- 88 the extent to which any license under such rights might or might not be available; neither does it
- 89 represent that it has made any effort to identify any such rights. Information on OASIS' procedures with
- 90 respect to rights in any document or deliverable produced by an OASIS Technical Committee can be
- 91 found on the OASIS website. Copies of claims of rights made available for publication and any
- 92 assurances of licenses to be made available, or the result of an attempt made to obtain a general license
- 93 or permission for the use of such proprietary rights by implementers or users of this OASIS Committee
- 94 Specification or OASIS Standard, can be obtained from the OASIS TC Administrator. OASIS makes no
- 95 representation that any information or list of intellectual property rights will at any time be complete, or
- 96 that any claims in such list are, in fact, Essential Claims.
- 97 The name "OASIS", is a trademark of OASIS, the owner and developer of this specification, and should
- 98 be used only to refer to the organization and its official outputs. OASIS welcomes reference to, and
- 99 implementation and use of, specifications, while reserving the right to enforce its marks against
- misleading uses. Please see http://www.oasis-open.org/who/trademark.php for above guidance.

sdd-spec-v1.0-os.doc Copyright © OASIS® 2007, 2008. All Rights Reserved.

Table of Contents

102

103	Notices	3
104	Table of Contents	4
105	1 Introduction	9
106	1.1 Terminology	9
107	1.2 Purpose	9
108	1.3 Scope	10
109	1.4 Audience	10
110	1.5 How to Read this Document	10
111	1.6 Motivation	10
112	1.7 Requirements	11
113	1.8 XML Namespaces	13
114	1.9 Notational Conventions	13
115	1.10 General Document Conventions	13
116	1.11 Diagram Conventions	13
117	1.12 Normative References	15
118	1.13 Non-Normative References	15
119	2 Solution Deployment Descriptor Overview	16
120	2.1 Package and Deployment Descriptors	
121	2.2 Topology	16
122	2.3 Content and Artifacts	16
123	2.4 Resulting and Changed Resources	17
124	2.5 Base, Selectable and Localization Content Hierarchies	17
125	2.6 Constraints	18
126	2.7 Requirements	18
127	2.8 Conditions	18
128	2.9 Variables	18
129	3 Package Descriptor	19
130	3.1 PackageDescriptor	19
131	3.1.1 PackageDescriptor Property Summary	19
132	3.1.2 PackageDescriptor Property Usage Notes	19
133	3.2 DescriptorInfoGroup	20
134	3.2.1 DescriptorInfoGroup Property Usage Notes	20
135	3.3 PackageIdentityType	22
136	3.3.1 PackageIdentityType Property Summary	22
137	3.3.2 PackageIdentityType Property Usage Notes	
138	3.4 IdentityType	24
139	3.4.1 IdentityType Property Summary	24
140	3.4.2 IdentityType Property Usage Notes	25
141	3.5 MaintenanceInformationType	
142	3.5.1 MaintenanceInformationType Property Summary	
143	3.5.2 MaintenanceInformationType Property Usage Notes	
144	3.6 FixIdentityType	
145	3.6.1 FixIdentityType Property Summary	27

146	3.6.2 FixIdentityType Property Usage Notes	27
147	3.7 BuildInformationType	27
148	3.7.1 BuildInformationType Property Summary	28
149	3.7.2 BuildInformationType Property Usage Notes	28
150	3.8 ManufacturerType	28
151	3.8.1 ManufacturerType Property Summary	28
152	3.8.2 ManufacturerType Property Usage Notes	28
153	3.9 LocationType	29
154	3.9.1 LocationType Property Summary	29
155	3.9.2 LocationType Property Usage Notes	29
156	3.10 VersionType	29
157	3.11 ContentsType	29
158	3.11.1 ContentsType Property Summary	29
159	3.11.2 ContentsType Property Usage Notes	30
160	3.12 ContentType	30
161	3.12.1 ContentType Property Summary	
162	3.12.2 ContentType Property Usage Notes	30
163	3.13 DigestInfoGroup	31
164	3.13.1 DigestInfoGroup Property Usage Notes	31
165	4 Deployment Descriptor	32
166	4.1 DeploymentDescriptor	32
167	4.1.1 DeploymentDescriptor Property Summary	33
168	4.1.2 DeploymentDescriptor Property Usage Notes	
169	4.2 Topology	34
170	4.2.1 TopologyType	
171	4.2.2 ResourceType	
172	4.2.3 PropertyType	
173	4.2.4 ResultingPropertyType	
174	4.3 Atomic Content Elements	
175	4.3.1 InstallableUnitType	
176	4.3.2 ConfigurationUnitType	
177	4.3.3 ArtifactType	
178	4.3.4 InstallationArtifactsType	
179	4.3.5 ConfigurationArtifactsType	
180	4.3.6 OperationListType	
181	4.3.7 OperationType	
182	4.3.8 ArgumentListType	
183	4.3.9 ArgumentType	
184	4.3.10 OutputVariableListType	
185	4.3.11 OutputVariableType	
186	4.3.12 AdditionalContentType	
187	4.3.13 SubstitutionType	
188	4.3.14 CompletionType	
189	4.4 Constraints	
190	4.4.1 CapacityConstraintType	57

191	4.4.2 CapacityValueType	58
192	4.4.3 ConsumptionConstraintType	59
193	4.4.4 ConsumptionConstraintValueType	60
194	4.4.5 PropertyConstraintType	61
195	4.4.6 PropertyValueListType	61
196	4.4.7 VersionConstraintType	62
197	4.4.8 VersionConstraintValueType	63
198	4.4.9 VersionValueType	
199	4.4.10 VersionRangeType	64
200	4.4.11 MaxVersionType	
201	4.4.12 UniquenessConstraintType	65
202	4.4.13 RelationshipConstraintType	66
203	4.5 Conditions	
204	4.5.1 ConditionType	67
205	4.5.2 AlternativeConditionalType	
206	4.5.3 ConditionalResourceConstraintType	
207	4.5.4 ConditionalPropertyConstraintType	
208	4.6 Variables	
209	4.6.1 VariableExpressionType	
210	4.6.2 BaseVariableType	
211	4.6.3 VariablesType	
212	4.6.4 ParametersType	
213	4.6.5 BaseParameterType	
214	4.6.6 IntegerParameterType	
215	4.6.7 BoundaryType	
216	4.6.8 StringParameterType	
217	4.6.9 StringCaseType	
218	4.6.10 BooleanParameterType	
219	4.6.11 URIParameterType	
220	4.6.12 ResourcePropertyType	
221	4.6.13 DerivedVariableType	
222	4.6.14 ConditionalDerivedVariableExpressionType	
223	4.7 Requirements	
224 225	4.7.1 RequirementsType	
225 226	4.7.3 AlternativeRequirementType	
220 227	4.7.4 ResourceConstraintGroup	
22 <i>1</i> 228	4.7.5 RequirementResourceConstraintType	
220 229	4.7.6 InternalDependencyType	
230	4.7.7 DependencyType	
230 231	4.7.8 RequiredBaseType	
231 232	4.7.9 RequiredBaseConstraintType	
232 233	4.7.10 AlternativeRequiredBaseConstraintType	
233 234	4.8 Resulting and Changed Resources	
23 4 235	4.8.1 ResultingResourceType	
200	T.O. I I Tesului igi Tesuuree i ype	97

236	4.8.2 ResultingChangeType	99
237	4.8.3 RelationshipType	101
238	4.9 Composite Content Elements	101
239	4.9.1 CompositeInstallableType	103
240	4.9.2 CompositeUnitType	106
241	4.10 Aggregation	108
242	4.10.1 ReferencedPackageType	112
243	4.10.2 ResourceMapType	115
244	4.10.3 ResultingResourceMapType	116
245	4.10.4 ResultingChangeMapType	118
246	4.10.5 RequisitesType	119
247	4.11 Base Content	120
248	4.11.1 BaseContentType	120
249	4.12 Content Selectability	121
250	4.12.1 SelectableContentType	121
251	4.12.2 GroupsType	122
252	4.12.3 GroupType	123
253	4.12.4 FeaturesType	124
254	4.12.5 FeatureType	125
255	4.12.6 NestedFeatureType	126
256	4.12.7 MultiplicityType	129
257	4.12.8 FeatureReferenceType	130
258	4.12.9 ContentElementReferenceType	130
259	4.12.10 PackageFeatureReferenceType	131
260	4.12.11 ConstrainedResourceType	131
261	4.12.12 MultiplicityConstraintType	132
262	4.12.13 RequiredContentSelectionType	132
263	4.12.14 ContentSelectionFeatureType	
264	4.12.15 MultiSelectType	
265	4.13 Localization	134
266	4.13.1 LocalizationContentType	135
267	4.13.2 LocalizationUnitType	
268	4.13.3 CompositeLocalizationUnitType	139
269	4.13.4 LanguageSelectionsType	142
270	4.13.5 OptionalLanguagesType	142
271	4.13.6 LanguagesType	
272	4.13.7 LanguageType	
273	4.13.8 LanguageSetType	
274	4.14 Display Information	
275	4.14.1 DescriptionGroup	
276	4.14.2 DisplayElementGroup	
277	4.14.3 DisplayTextType	
278	5 Conformance	
279	5.1 General Conformance Statements	
280	5.2 Conformance Levels	147

281		5.2.1 CL Capabilities	
282		5.2.2 Conformance Level Differences	148
283	5	5.3 Profiles	150
284		5.3.1 Profile Creation	150
285		5.3.2 Profile Publication	
286		5.3.3 Profile Applicability	
287	5	5.4 Compatibility Statements	151
288	Ę	5.5 Conformance Clause	151
289		5.5.1 Conformance for Users of This Specification	151
290		5.5.2 Conformance for This Specification Itself	151
291	A.	Schema File List	153
292	B.	Acknowledgements	154
293			

1 Introduction 294 295 The Solution Deployment Descriptor (SDD) specification defines a standard, in the form of a schema for 296 XML documents, called Solution Deployment Descriptors, or SDDs. SDDs define metadata that describes 297 the packaging and deployment characteristics of resources that are relevant for their lifecycle management, including creation, configuration and maintenance. 298 A.1 Terminology 299 300 The following terms are used in this specification in a specialized sense that might differ from definitions 301 elsewhere. 302 **Artifact** 303 Zero or more files and/or metadata used to perform a deployment lifecycle operation on a 304 resource. 305 Deployment lifecycle 306 The stages marking maturation of a solution: develop, package, integrate, manufacture, install, configure, evaluate, deploy into production, upgrade and/or update, uninstall. 307 308 **Host Resource** 309 A resource that provides the execution environment for another resource. 310 **Package** A set of artifacts used to perform deployment lifecycle operations on a group of related resources 311 that make up a solution. 312 313 Resource 314 A particular element of a computing environment, such as a computer system, an operating 315 system, a Web server, a software application, or a complex solution. 316 Solution 317 One or more interrelated resources on which deployment lifecycle operations can be performed. 318 **Target Resource** 319 A resource that processes artifacts to perform deployment lifecycle operations on another 320 resource. The *host resource* often serves as the target resource. 321 **Topology** 322 The physical or logical layout of a solution's resources. 323 Update (n.) 324 A package that replaces a limited set of the resources in a solution instance. An update does not 325 require migration. 326 Upgrade (n.) 327 A package that replaces all, or a significant portion of, the resources used in a solution. An

sdd-spec-v1.0-os.doc Copyright © OASIS® 2007, 2008. All Rights Reserved.

The purpose of this document is to provide the normative specification of the SDD, including concepts,

upgrade might or might not require migration.

328

329 330

331

1.1 Purpose

structure, syntax, semantics and usage.

332 **1.2 Scope**

- This document is the specification for the SDD. It consists of both normative and non-normative prose,
- diagrams, schema and examples. The document is intended to facilitate an understanding of the SDD
- concepts, structure, syntax, semantics and usage. This document is not intended to be a tutorial.
- 336 This document is the full SDD specification, but it also is augmented with other documents produced by
- the SDD TC, including the SDD XML Schema and Examples (see Appendix [A]), [SDDP], [SDDSP] and
- the set of SDD profiles (see section [5.3]), as well as documents produced by others (see section [5.3.1]).

1.3 Audience

350

351

352

359

360

361

362

363 364

365

366

367 368

369

370

371

372

373

374

375

376

377

378

- 340 This document is intended to assist those who require an understanding of the nature and details of the
- 341 SDD. This includes architects, developers, solution integrators and service/support personnel who
- generate, consume, or otherwise use SDDs, as well as those who develop tooling and applications for
- 343 constructing and deploying SDDs.

1.4 How to Read this Document

- The various audiences of this specification might have different objectives and purposes when reading the document. You might wish to generally understand the SDD, or learn the details of the SDD to create or consume SDDs, or use the document as a reference.
- If your purpose is to understand the major capabilities and characteristics of the SDD and how they fit together, start by reading the Introductions to the major sections: [3], [4] and [4.1]–[4.14].
 - If your purpose is to understand the major elements of the SDD and how they work together to accomplish the goals of this specification, read in addition to the above, the introductions to each of the type sections [3.1]–[3.13] and the type subsections within sections [4.2]–[4.14].
- If your purpose is to understand the syntax of the SDD, look at the tables in each of the Property Summary sections.
- If your purpose is to understand the semantics of the elements and attributes of the SDD, read the Property Usage Notes sections.
- If your purpose is to understand only the package descriptor, subset the above suggestions to focus on the sub-sections within section [3].
 - If your purpose is to understand only the deployment descriptor, subset the above suggestions to focus on the sub-sections within section [4].

1.5 Motivation

The motivation for producing this specification is best expressed in this excerpt from the SDD Technical Committee's charter:

Deployment and lifecycle management of a set of interrelated software, hereinafter referred to as a solution, is a predominantly manual operation because there is currently no standardized way to express installation packaging for a multi-platform environment. Each hosting platform or operating system has its own format for expressing packaging of a single installable unit but, even on these homogeneous platforms, there is no standardized way to combine packages into a single aggregated unit without significant re-creation of the dependency and installation instructions. The problem is compounded when the solution is to be deployed across multiple, heterogeneous, platforms. A standard for describing the packaging and mechanism to express dependencies and various lifecycle management operations within the package would alleviate these problems and subsequently enable automation of these highly manual and error-prone tasks.

The purpose of this Technical Committee is to define XML schema to describe the characteristics of an installable unit (IU) of software that are relevant for core aspects of its deployment, configuration and maintenance. This document will be referred to as the Solution Deployment Descriptor (SDD).

SDDs will benefit member companies and the industry in general by providing a consistent model and semantics to address the needs of all aspects of the IT industry dealing with software deployment, configuration and lifecycle management. The benefits of this work include:

- ability to describe software solution packages for both single and multi-platform heterogeneous environments.
- ability to describe software solution packages independent of the software installation technology or supplier.
- ability to provide information necessary to permit full lifecycle maintenance of software solutions.

1.6 Requirements

A summary of requirements satisfied by this SDD specification follows. Detailed requirements that support approved use cases are available at the SDD TC Web page, http://www.oasis-open.org/committees/sdd.

Solution lifecycle management

The SDD must provide information to support the complete lifecycle of a software solution. Certain key requirements are applicable to all phases of deployment lifecycle operation: planning, installation, configuration, maintenance, upgrade, migration and uninstallation.

Solution requirements for environment to perform lifecycle management tasks

A deployment lifecycle operation on a target resource is often dependent on a certain set of conditions that must exist on the target. This set of pre-existing conditions is known as the *environment*. If successful deployment lifecycle operations are dependent on a certain set of pre-existing conditions (environment), then the SDD specification must support the ability to specify the required environment.

Projected changes to environment

The SDD specification must support the definition of environment changes that become effective once the lifecycle operation is complete.

Solution instance variability

The SDD specification must support the definition of the appropriate information for a runtime to vary the ways in which the solution can be deployed. This information is also needed to enable an integrator to control the variability according to the needs of their higher-level solution.

This variability includes the information to control (1) the subset of capability that can be deployed; (2) setting the initial configuration of the solution; and (3) varying the topology in which the solution can be deployed.

Solution composition

The SDD specification must support the ability for the author to compose solution packages from multiple components, products, or solutions.

Solution and packaging identity

The SDD specification must support the definition of identity information for the solution package, resources that make up the solution, and solution itself to support use cases including asset management, license management, support/update entitlement, component reuse during development, reports and queries from a package repository, identifying associated documentation, solution lifecycle management, traceability to build/development environment and problem management systems, correlation into the hosting environment, component reuse, and maintenance history. Also, the SDD specification must support the definition of the identity description information used by a runtime to assist a user in making correct decisions about solution installation. The SDD specification must support the definition of the information that uniquely identifies the SDD descriptor and the ability to identify the version of the SDD. The customer should be able to identify the solution packages with consistent names.

sdd-spec-v1.0-os.doc Copyright © OASIS® 2007, 2008. All Rights Reserved.

Physical packaging

Physical packaging information should be contained in a separate media descriptor. The deployment model for a solution should be decoupled from the details of physical packaging. The format and structure of the physical packaging is outside the scope of SDD v1.0.

Interoperability with existing software packaging technologies

The SDD specification must support the ability for the author to compose solutions from existing software packages that do not have an SDD. This means that the SDD should be able to describe existing software packages.

Conform to external standards

The SDD specification must provide for alternative descriptive text to be defined for any images, animations, or audio information contained in the descriptor.

Decision support

Requirements to perform lifecycle management operations within various target environments may not be satisfied in the target's current state but might be able to be satisfied with additional operations. For example, successful deployment of a set of Java[™] components is dependent on the existence of a Java runtime environment that is not included with the solution. The SDD should have the ability to specify information that will assist lifecycle management tools in planning for, accessing and installing these external requirements.

Specification organization

The SDD specification must provide the semantic behavior expected by producers and consumers of SDDs. This information allows for the producers to ensure that the consumers of their SDDs will provide the support intended.

Solution metadata

The SDD metadata may not encompass all of the information about the solution in all contexts in which the solution can be deployed. Additional metadata that is outside of the scope of the SDD is available at the SDD TC Web page, http://www.oasis-open.org/committees/sdd.

Globalization

For all content in the SDD that would be displayed to a user, the specification must support the definition of strings for multiple locales; for example, this content must be localizable.

Align with other standards bodies

Satisfying all the requirements listed here calls for extensive standardization in specific areas. The requirements should thus be aligned with other appropriate standards bodies. The SDD reuses existing OASIS and other standards where appropriate and aligns with other standards bodies (for example, [OGF-ACS]) that are developing standards in the same domain as SDD.

sdd-spec-v1.0-os.doc 1 September 2008 Copyright © OASIS® 2007, 2008. All Rights Reserved. Page 12 of 154

_

¹ Java is a trademark or registered trademark of Sun Microsystems, Inc. in the United States and other countries.

1.7 XML Namespaces

- The XML namespaces defined as part of this specification are:
- 463 sdd-pd: stands for the package descriptor portion of the SDD namespace.
- **sdd-dd**: stands for the deployment descriptor portion of the SDD namespace.
- 465 **sdd-common**: stands for the common (shared) types, elements and groups of the SDD namespace.
- For XML namespaces not defined as part of this specification, conventional XML namespace prefixes are
- used as follows, regardless of whether a namespace declaration is present in the example:
- 468 The prefix xsd: stands for the W3C XML Schema namespace [XSD].
- 469 The prefix **ds:** stands for the digital signature namespace [XMLDSIG-CORE].

470 1.8 Notational Conventions

- Everything in the specification, including the Appendices, is considered normative except for the abstract,
- examples and any sections or other material marked as non-normative.
- The keywords "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD
- 474 NOT", "RECOMMENDED", "MAY" and "OPTIONAL" in this document are to be interpreted as described
- 475 in [RFC2119].
- 476 These keywords are capitalized when used unambiguously to specify requirements or application
- 477 features and behavior. When these words are not capitalized, they are meant in their natural-language
- 478 sense.

479

502

461

1.9 General Document Conventions

- In describing XML elements and attributes of the SDD schema, this document contains many cross-
- 481 references. Such references appear as the referenced section number inside square brackets, for
- example, [4.5]. In electronic versions of this specification, the cross-references can act as links the target
- 483 section.
- The following property naming convention is used in the schema: Element and type names begin with an
- 485 uppercase letter and attribute names begin with a lowercase letter.
- Italics are used to identify element and attribute names, type names and enumerated values defined by
- 487 an SDD type.
- 488 In describing the XML schema, each section typically contains the following subsections:
- 489 A diagram illustrating the element, group, or type that is specified in the section.
- Property Summary: A table listing the schema elements and attributes, along with the data type, cardinality and description for each one.
- When specified, extension points are listed in the tables with no name and a type of xsd: any for element extensions and xsd: anyAttribute for attribute extensions. Cardinality is also provided.
- When a type is an extension of another type, the extended type is listed in the table with no name and prefixed with **[extends]**. The extended type's properties can be referenced from the appropriate section listed in the description column.
- When the schema specifies a default or fixed attribute value, that value is prefixed with two asterisks, as in **default value="true".
- Property Usage Notes: A list of the elements and attributes, along with more detailed prose descriptions of the properties and how they fit into the schema as a whole.
- Not all sections contain every one of the preceding subsections.

1.10 Diagram Conventions

Sections 3 and 4 of this specification contain diagrams that illustrate the structure of elements, data types and groups used throughout the SDD schema. Figure 1 is an example of this type of diagram.




Figure 1: Sample XML structure diagram.

507 Elements are represented by the element name inside a rectangle. A rectangle with a solid border denotes an element.

Where appropriate, the cardinality of an element is indicated by a rectangle with the cardinality listed underneath, using the form "*min..max*". For example, "1..∞" indicates a minimum of one occurrence of the element and an unbounded upper limit:

```
SelectedFeature ⊕
```

505 506

509

510

511

512

515

517

520

523 524

525

527

528

References to global elements are denoted by a small arrow in the lower right corner of the element's rectangle:

Attributes are denoted by a "@" symbol followed by the attribute name, inside a dashed rectangle.

```
@ type ⊞
```

Complex types are denoted by a rectangle with all the corners truncated and a white square followed by the element name:

521 Simple types are denoted by a rectangle with all the corners truncated and a white triangle followed by the element name:

```
✓ DependencyType  ⊕
```

Groups are denoted by a rectangle with three small squares followed by the group name: black squares and a solid rectangle indicate element groups and white squares with a dashed rectangle indicate

526 attribute groups:

```
■ DisplayElementGroup
```

A plus sign on the right border of a component indicates hidden child elements or attributes. When

529 hidden, the child elements are usually described in a separate section.

530 There are two connectors (or compositors) used in the SDD schema diagrams to combine elements:

531 • A sequence of elements is indicated by the following symbol:



■ A choice among elements is indicated by the following symbol:

A large yellow box indicates a data type that is referenced.

Blue shading appearing in a figure has no significance; it simply indicates that a component was currently selected in the XML editor.

536 The XSD schema figures were created with <oXygen/>.

1.11 Normative References

537 538

541

542

543

544

545

546 547

548

549

550

551

552

553

554

555 556

557

558

559

560 561

562563

566

567

568

570

571 572

573

574

575

576 577

[CL2_Schema]	Solution Deployment Descriptor Schema
--------------	---------------------------------------

See Appendix [A] for location.

540 [CONFORM] OASIS, OASIS Conformance Requirements for Specifications 1.0,

http://www.oasis-

open.org/committees/download.php/305/conformance_requirements-v1.pdf.

[IANA-CHARSET] Internet Assigned Numbers Authority, Character Sets,

http://www.iana.org/assignments/character-sets, modified December 2006.

[IETF-UUID] Internet Engineering Task Force Draft Specification,

http://www.ietf.org/rfc/rfc4122.txt.

[ISO639.2] Library of Congress, Codes for the Representation of Names of Languages,

http://www.loc.gov/standards/iso639-2/englangn.html.

[ISO3166] International Organization for Standardization, English Country Names and Code

Elements, http://www.iso.ch/iso/en/prods-services/iso3166ma/02iso-3166-code-

lists/list-en1.html.

[RFC2119] S. Bradner, Key words for use in RFCs to Indicate Requirement Levels,

http://www.ietf.org/rfc/rfc2119.txt, IETF RFC 2119, March 1997.

[RFC3066] H. Alvestrand, ed. RFC 3066: Tags for the Identification of Languages 1995,

http://www.ietf.org/rfc/rfc3066.txt.

[UNIT] Bureau International des Poids et Mesures, http://www.bipm.fr.

[XMLDSIG-CORE] Bartel et al., XML-Signature Syntax and Processing,

http://www.w3.org/TR/xmldsig-core/, W3C Recommendation, February 2002.

[XSD] W3C Schema Working Group, XML Schema, http://www.w3.org/TR/xmlschema-

1/, W3C Recommendation, October 2004.

1.12 Non-Normative References

[CL1_Schema]	Solution Dep	loyment Descripto	or Conformance	Level 1 Schema
--------------	--------------	-------------------	----------------	----------------

See Appendix [A] for location.

565 [CIM] Distributed Management Task Force, Inc., Common Information Model (CIM)

http://www.dmtf.org/standards/cim/.

[OGF-ACS] Open Grid Forum, Application Contents Service WG (ACS-WG),

http://www.ogf.org/gf/group_info/view.php?group=acs-wg.

569 **[SDDP]** Solution Deployment Descriptor Primer

http://docs.oasis-open.org/sdd/v1.0/sdd-primer-v1.0.doc http://docs.oasis-open.org/sdd/v1.0/sdd-primer-v1.0.pdf http://docs.oasis-open.org/sdd/v1.0/sdd-primer-v1.0.html

[SDDSP] Solution Deployment Descriptor Starter Profile

http://docs.oasis-open.org/sdd/v1.0/sdd-starter-profile-v1.0.doc http://docs.oasis-open.org/sdd/v1.0/sdd-starter-profile-v1.0.pdf http://docs.oasis-open.org/sdd/v1.0/sdd-starter-profile-v1.0.html

578 579

2 Solution Deployment Descriptor Overview

2.1 Package and Deployment Descriptors

- 582 The package descriptor defines package content which includes artifacts whose processing results in 583 deployment of the software package. The deployment descriptor defines metadata associated with those 584 artifacts. The SDD package descriptor defines the package identity, the package content and various 585 other attributes of the package. Each SDD consists of exactly one deployment descriptor and one 586 package descriptor. The deployment descriptor is where the topology, selectability, inputs, requirements
- and conditions of the deployment are described. 587

2.2 Topology 588

580

581

602

- 589 The SDD's topology describes all the resources that may be required, created or modified when any of 590 the deployment operations supported by the SDD are performed.
- 591 Primary identifying characteristics of the resources can be defined in topology. The topology includes 592 identification of hosts-hosted by relationships between resources. It is usual that only a subset of the 593 resources described in topology will play a role in any particular deployment. This is determined by the 594 selection of content elements for the particular deployment. The resources that are required, created or 595 modified by the content elements in scope for the deployment are the ones that will participate in the 596 deployment and so will be associated with resources in the deployment environment.
- 597 At deployment time, definitions of the resources that participate in that particular deployment are 598 associated with actual resource instances in the deployment environment. The mechanism for 599 associating resource definitions with resource instances is not defined by the SDD.
- 600 The only resource definitions in the SDD are in topology. All other mention of resources in the SDD are 601 references to the resource definitions in the topology.

2.3 Content and Artifacts

- 603 Metadata throughout the deployment descriptor is associated with package content in the definition of 604 atomic content elements. The atomic content elements are InstallableUnit, ConfigurationUnit and 605 LocalizationUnit. These are the only content elements that define Artifacts elements.
- 606 Artifact elements identify an artifact file or set of files defined in package content whose processing will 607 perform all or a portion of the deployment for a particular deployment lifecycle operation. Artifact elements 608 define the inputs and outputs, substitution values and types associated with the artifact files. The content 609 element's target resource, identified by targetResourceRef, processes the artifact files with the defined 610 inputs to perform deployment operations. Examples of artifact types include zip files, rpm files and 611 executable install files. Artifact types are not defined by this specification. The artifact types defined in the 612 SDD need to be understood by software that processes the SDD. Profiles are used to communicate the
- artifact types that an implementation is capable of processing [5.3]. 613
- Composite content elements organize the content of an SDD but do not define artifacts used to deploy 614 615 SDD content. There are three types of composite content elements: CompositeInstallable, CompositeUnit
- and CompositeLocalizationUnit. 616
- 617 CompositeInstallable is used any time that more than one content element is defined in support of one
- 618 operation on the package; any time aggregation of SDDs is needed; or any time the package includes
- 619 selectable content. CompositeInstallable is the root of a content hierarchy that supports a single
- 620 deployment lifecycle operation. It can define a base content hierarchy, a localization content hierarchy
- 621 and a selectable content hierarchy that includes selection criteria. One SDD can have more than one
- 622 CompositeInstallable—each supporting a different operation.
- 623 CompositeUnit is used to organize content elements within the base or selectable content hierarchies.
- 624 CompositeUnits can define InstallableUnits, ConfigurationUnits, ContainedPackages and other

- 625 CompositeUnits. Requirements, conditions and variables that are common to all content elements defined
- by the CompositeUnit can be defined in the CompositeUnit to avoid repetition. Within the selectable
- content hierarchy, a *CompositeUnit* can provide an efficient means for selection of a set of related content
- 628 elements by a *feature*.
- 629 CompositeLocalizationUnit serves the same purposes as CompositeUnit within the LocalizatonContent
- 630 hierarchy.
- 631 SDD packages can aggregate other SDD packages. Metadata about the aggregation is defined in
- 632 ContainedPackage, ContainedLocalizationPackage and Requisite elements. ContainedPackage
- elements are a content element that can be defined anywhere in the base and selectable content
- 634 hierarchies. ContainedLocalizationPackages are content elements that can be defined in the localization
- content hierarchy. Requisites are packages that can be deployed, if necessary, to satisfy requirements in
- the aggregating SDD. They are not content of the SDD package. The type of all three of these elements
- is ReferencedPackageType. The term "referenced package" is used in this specification when referring to
- 638 these elements as a group. The term "referenced SDD" is used when referring to any aggregated SDD.
- 639 Each referenced package element can further constrain the deployment of the referenced SDD by
- defining additional requirements; by mapping resources defined in the aggregating SDD to those defined
- in the referenced SDD; and by determining feature selections for deployment of the referenced SDD.

2.4 Resulting and Changed Resources

- Deployment of an SDD package creates or modifies software resources. These resources are included in
- the topology definition and described in more detail in ResultingResource and ResultingChange
- elements.

642

654

- The SDD author can choose to model resulting and modified resources at a very granular level, at a very
- coarse level; at any level in between, or not at all. An example of modeling resulting resources at a
- granular level would be modeling every file created by the deployment as a resulting resource. An
- example of modeling resulting resources at a very coarse level would be modeling the software product
- created by deployment as a single resulting resource. The choice depends on the needs of the solution
- deployment. If a resource is not modeled in the SDD, no requirements can be expressed on it, no
- 652 conditions can be based on it and no variables can be set from values of its properties. It cannot play any
- of the roles described for resources in the ResourceType section of this document [4.2.2].

2.5 Base, Selectable and Localization Content Hierarchies

- Each CompositeInstallable element can define three types of content hierarchies. Base content is the
- default content for the deployment lifecycle operation associated with the CompositeInstallable. This is
- content that will be deployed whenever the associated operation is performed on the SDD package. Base
- content may be conditioned on characteristics of the deployment environment but it is not selectable by
- the deployer.
- The SDD author can define selectable subsets of optional content in the selectable content hierarchy.
- The selection criteria include features and groups of features that select content from the selectable
- content hierarchy. Selectability, as used in the SDD, is a characteristic of the deployment lifecycle
- operation and the package. For example, the decision to provide selectability for one operation in one
- 664 package has no semantic relationship to the selectability provided in another package related to the same
- software. It also has no semantic relationship to the selectability provided for a different operation within
- the same package.
- Localization content is the third type of content hierarchy. Localization refers to enabling a particular piece
- of software for support for one or more languages. Anything that needs to be deployed to provide support
- 669 for a particular language in that software is considered localization content. Translated materials are a
- primary, but not the only, example of localization content.
- 671 Localization content is similar in many ways to other content, but there are important differences in how
- 672 localization content is selected for deployment that lead to the need for a separate content hierarchy and
- separate types. There are two criteria for determining that localization content is in scope for a particular
- 674 deployment.

- The first criterion has to do with the language or languages supported by the localization content. At least one of the languages must be in scope for the content to be selected.
 - The second criterion has to do with the availability of the resources to be localized—the localization base. The localization base may be a resource deployed by base or selectable content, or it may be a resource previously deployed and found in the deployment environment.

2.6 Constraints

677

678 679

680

688

693

706

707

709

710

713

- The SDD author needs to communicate constraints on resources for a variety of purposes.
- Some constraints must be met for the requirements of a content element to be met.
- Other constraints must be met for a resource to serve as the required base for an update.
- Still others must be met to satisfy a condition that determines the applicability of a content element or completion action.
- 686 The Constraint types are:
- 687 CapacityConstraint
 - ConsumptionConstraint
- 689 PropertyConstraint
- 690 VersionConstraint
- 691 UniquenessConstraint
- 692 RelationshipConstraint

2.7 Requirements

- Requirements are defined by content elements. A requirement consists of resource constraints that the
- SDD author states MUST be met prior to successful deployment or use of the software described by the
- SDD package. Each requirement definition lists one or more deployment lifecycle operations to which the
- 697 requirement applies. When the requirement is specified in an atomic content element, the operation
- 698 associates the requirement with artifacts within the atomic content element
- When a requirement can be satisfied in more than one way, alternatives can be defined within a
- 700 requirement. A requirement is considered met when any one of the alternatives is satisfied.

701 2.8 Conditions

- 702 Conditions are expressed on characteristics of resources in the deployment environment. Conditions are used to indicate when particular elements of the SDD are applicable, or when they should be ignored.
- Conditions are not requirements. Failure to satisfy a condition does not indicate a failure; it simply means
- the conditioned element should be ignored. Conditions are used to:
 - determine if a content element is applicable
 - choose from among values for a variable
- 708 determine when a feature is applicable
 - determine when a particular result is applicable
 - determine if a particular completion action is necessary.
- 711 Because conditions are always based on the characteristics of resources, they are expressed using resource constraints.

2.9 Variables

- 714 Variables provide a way to associate user inputs, resource property values, fixed strings and values
- 715 derived from these with input arguments for artifacts and with constraints on resources.

3 Package Descriptor

- 717 A package descriptor is an XML document that provides information about the identity and the contents of
- a software package. A software package is a bundle of one or several content elements that deploy or
- remove computer software; add features to existing software; or apply maintenance to existing software.
- 720 Each package descriptor is associated with a deployment descriptor.

721 3.1 PackageDescriptor

716

722 723

724

725 726

727

728

730 731

732

733




Figure 2: PackageDescriptor structure.

The root element of a package descriptor XML document is *PackageDescriptor*. *PackageDescriptor* includes elements that describe the package identity and the contents that make up the package. The *PackageDescriptor* includes the associated deployment descriptor XML document by defining a *Content* element with a *purpose* attribute set to *deploymentDescriptor*.

3.1.1 PackageDescriptor Property Summary

Name	Data Type	*	Description
Packageldentity	PackageIdentityType	1	Human-understandable identity information for the software package.
Contents	ContentsType	1	A list of package contents.
ds:Signature	ds:SignatureType	01	A signature for the package descriptor.
schemaVersion	xsd:string	1	The descriptor complies with this version of the Solution Deployment Descriptor Specification. **fixed value="1.0"
descriptorID	UUIDType	1	Identifier of a particular package's descriptor.
lastModified	xsd:dateTime	1	The time the descriptor was last modified.
descriptorLanguageBundle	xsd:token	01	The root name of language bundle files containing translations for display text elements in the PackageDescriptor.
	xsd:anyAttribute	0*	

729 3.1.2 PackageDescriptor Property Usage Notes

- PackageIdentity: The PackageIdentity element provides identity information about the software
 package that can be used by the consumer of the package for deployment planning or aggregation of
 the package into a larger solution.
- See the PackageIdentityType section for structure and additional usage details [3.3].

- **Contents**: The *Contents* element defines a list of one or more *Content* elements describing all the files that are part of the package. All files in the package MUST be defined in *Contents*.
- See the ContentsType section for structure and additional usage details [3.11].
- ds:Signature: The package descriptor and each file in the package MAY be digitally signed. It is RECOMMENDED that they be digitally signed by using an XML-Signature [XMLDSIG-CORE].
 - The signature element is an enveloped signature over the SDD package. Note that each *Content* element included in the package is digitally signed indirectly via this digest. Files can also be individually signed in the *Content* element.
 - schemaVersion, descriptorID, lastModified, descriptorLanguageBundle: See the DescriptorInfoGroup section for structure and additional usage details [3.2].

744 3.2 DescriptorInfoGroup

739

740

741 742

743

745 746

747 748

749 750

751

752

753

754

755 756

757

758

759 760

761 762

763

764 765

766

767

768

769

770




Figure 3: DescriptorInfoGroup structure.

The attributes defined by *DescriptorInfoGroup* are included in both *PackageDescriptor* and *DeploymentDescriptor*.

3.2.1 DescriptorInfoGroup Property Usage Notes

- **schemaVersion**: The *schemaVersion* attribute identifies the Solution Deployment Descriptor specification version to which the descriptor conforms. It MUST have a fixed value of "1.0".
- descriptorID: The descriptorID attribute, combined with the lastModified attribute value, provides a unique identifier for the descriptor. The descriptorID value MUST be unique within the scope of use of the deployment descriptor or package descriptor. The descriptorID attribute is an instance of UUIDType, which is based on xsd:hexBinary with length 16. This enables use of a 128-bit UUID [IETF-UUID]. The descriptorID value supports descriptor updates by allowing updated descriptors to be correctly associated with an earlier version of the same descriptor.

For example, if a descriptor contains errors, it may be replaced by an error-free version using the same descriptorID value but a different lastModified value.

 lastModified: The lastModified value can be used to differentiate between different versions of the same descriptor, for example, the descriptor for one particular package. Comparison of lastModified values can be used to determine which descriptor is newer.

The lastModified attribute MUST be defined as a value that conforms to the xsd:dateTime type as defined in [XSD] and MUST match the following lexical representation: [-]CCYY-MM-DDThh:mm:ss[Z|(+|-)hh:mm]. This is a combination of a complete date and time of day, where the time zone can be specified as Z (UTC) or (+|-)hh:mm.

For example, the following are valid values for the *lastModified* attribute:

- 2001-10-26T21:32:52
- 2001-10-26T21:32:52+02:00
- 2001-10-26T19:32:52Z

- 771 2001-10-26T19:32:52+00:00 772 • -2001-10-26T21:32:52 773 • 2001-10-26T21:32:52.12679 774 However, the following values would be invalid:
- 775 2001-10-26

779

780

781

782

783

784

785

786

787 788

789 790

791 792

793

- 776 2001-10-26T21:32
- 777 01-10-26T21:32
- 778 2001-10-26T25:32:52+02:00

The first three invalid examples do not specify all the required parts, and the fourth includes an out of range hours part, "25".

descriptorLanguageBundle: Language translations for elements of DisplayTextType in the descriptor MAY be included in the solution package. Note that these are not translations for the software deployed by the package, but rather translations only for the text in the descriptors themselves. The root name of the files containing these translations can be specified in the descriptorLanguageBundle attribute, which is an instance of xsd:token. Language bundles are associated with specific locales at run time using Java-style resource bundle resolution; that is, the bundle file names SHOULD take the form languageBundle_locale, where locale consists of optional language, location (country) and variant codes, separated by an underscore character. Language codes consist of two lowercase letters [ISO639.2] and location codes consist of two uppercase letters [ISO3166].

For example, "SampleStrings_en_US" refers to the United States English version of the SampleStrings bundle and "SampleStrings_ja" identifies the Japanese version of the same bundle.

See the *DisplayTextType* section for structure and additional usage details [4.14.3].

795 3.3 PackageldentityType

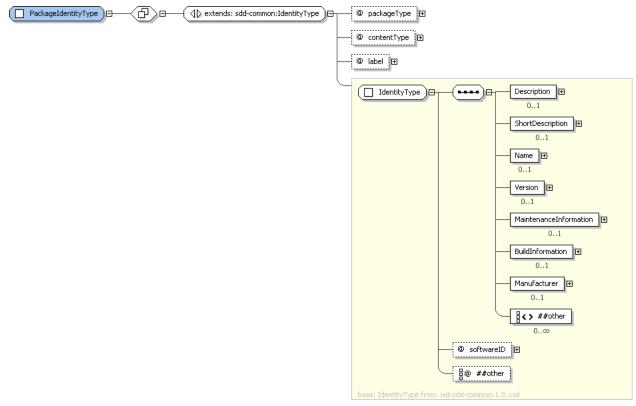


Figure 4: PackageIdentityType structure.

796 797

798

799

800

801

803

804

805

806

807 808

809

The software package described by the SDD can be identified for humans and package management software using the properties in *PackageIdentity*. The *PackageIdentity* is not to be confused with the identity of the deployed software, which is described in the resulting resource elements of the deployment descriptor; see the *ResultingResourceType* section [4.8.1].

802 3.3.1 PackageIdentityType Property Summary

Name	Data Type	*	Description
	[extends] IdentityType		See the IdentityType section for additional properties [3.4].
packageType	PackageTypeType	01	The type of the package, for example, "baseInstall" or "maintenance". **default value="baseInstall".
contentType	xsd:QName	01	The type of content provided by this package, for example, BIOS.
label	xsd:NCName	01	A programmatic label for this package.
	xsd:anyAttribute	0*	

3.3.2 PackageIdentityType Property Usage Notes


See the *IdentityType* section for details of the inherited attributes and elements [3.4].

packageType: The package type is provided to aid consumer understanding of the type of content contained in the package. A package can contain more than one type of content. In this case, a single packageType value should be selected that represents the primary content type as determined by the SDD author. The SDD defines a set of enumeration values in PackageTypeType which are extendable by the SDD author.

The enumerated types defined by the SDD are as follows:

- baseInstall: The value baseInstall indicates that the package provides a complete installation
 of the solution. This package type is associated with deployment descriptors that contain
 installable units with installation artifacts that install the primary solution resources.
 - When packageType is not specified, this is the default value.
- baseUninstall: The value baseUninstall indicates that the package provides a complete
 uninstallation of the solution. This package type is associated with deployment descriptors
 that contain installable units with uninstall artifacts that remove the primary solution
 resources.
- **configuration**: The value *configuration* indicates that the package configures the solution. This package type is associated with deployment descriptors that contain configuration units with configuration artifacts that configure the solution.
- **maintenance**: The value *maintenance* indicates that the package fixes one or more problems in the solution. This package type is associated with deployment descriptors that contain installable units with update artifacts.
- modification: The value modification indicates that the package modifies the function of the solution in some way such as by adding new function. This package type is associated with deployment descriptors that contain installable units with update artifacts.
- **replacement**: The value *replacement* indicates that the package installs a solution that replaces a previous version of the solution. Replacement MAY be associated with migration of data into the new solution and/or with deletion of the replaced solution. When associated with migration of data, installation or configuration artifacts within the solution package would perform the migration. When associated with deletion of the replaced solution, uninstall artifacts within the solution package would perform the deletion. This package type is associated with deployment descriptors that contain installable units with installation artifacts that deploy a set of resources that replace the set of resources associated with a previous version of the solution.
- **localization**: The value *localization* indicates that the package contains materials that localize deployed software for one or more languages.
- **contentType**: The value of *contentType* is determined by the SDD manufacturer to communicate a characteristic of the package that MAY be used in the manufacturer's package management system or other manufacturer-specific tools that use the SDD. The SDD author chooses the values; they are not defined in this specification.
- label: The label MAY be used as an index in a package management system. The SDD author chooses the values; they are not defined in this specification.

845 3.4 IdentityType

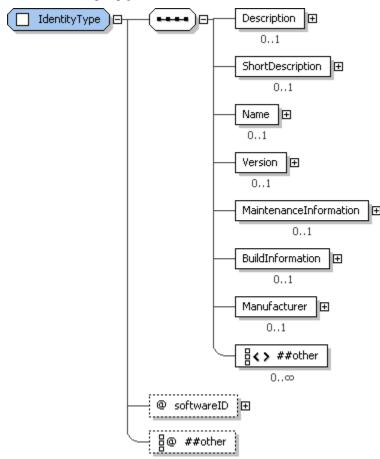

847 Figure 5: IdentityType structure.

846

848

849

850

851

852

This complex type provides identity information for the package as a whole, as well as for content elements, which are portions of the package. Content elements are the *InstallableUnit*, *LocalizationUnit*, *ConfigurationUnit*, *CompositeUnit* and *CompositeInstallable* elements defined in the deployment descriptor.

3.4.1 IdentityType Property Summary

Name	Data Type	*	Description
Description	DisplayTextType	01	A verbose description of the package or content element.
ShortDescription	DisplayTextType	01	A limited description of the package or content element.
Name	DisplayTextType	01	A human-readable, translatable, name for the package or content element.
Version	VersionType	01	The package or content element version.
MaintenanceInformation	MaintenanceInformationType	01	Information about package or content element content used when the package contains maintenance.
BuildInformation	BuildInformationType	01	A manufacturer identifier for the build of this package or content element. This property can be extended with additional manufacturer-specific information about the build.

Manufacturer	ManufacturerType	01	Information about the manufacturer of the package or content element.
	xsd:any	0*	
softwareID	xsd:string	01	A manufacturer's identification number for the software created or updated by the package or content element.
	xsd:anyAttribute	0*	

3.4.2 IdentityType Property Usage Notes

853 854

855

858

859

860 861

862

873

874

- Description, ShortDescription: These elements MAY be used to provide human-understandable information. If used, they MUST provide a description of the package.
- The Description element MUST be defined if the ShortDescription element is defined.
- 857 See the *DisplayTextType* section for structure and additional usage details [4.14.3].
 - Name: When the manufacturer of the SDD has a package management system, Name in PackageIdentity should correspond to the name of the package as known in the package management system. Name in a content element's Identity should correspond to the name of the unit of packaging, if it is known in the package management system.
 - When the PackageIdentity element is defined, Name MUST be defined.
- Software packages that create software often have the same name as the deployed software.

 Software packages that update software often have a name that reflects the fact that the package is a maintenance package, differentiating it from the base deployed software. The author of the software package that is described by *PackageIdentity* determines whether the *Name* is the same as or different from the *Name* of the deployed software.
- 868 See the *DisplayTextType* section for structure and additional usage details [4.14.3].
- Version: This is a packaging version. In *PackageIdentity*, it is the version of the package as a whole.
 In content element identities, this is the version of the unit of packaging represented by the content element. In either case, the SDD author MAY choose to make this version correspond to the version of a resulting or changed resource, but it should not be confused with resource versions.
 - In the case of a base install, version MAY be the same as the top level resulting resource. In the case of a configuration package, version SHOULD NOT be the same as the top level resulting resource.
- 875 See the VersionType section for structure and additional usage details [3.10].
- **MaintenanceInformation**: This is used when the package or content element describes the deployment of maintenance.
- See the *MaintenanceInformationType* section for structure and additional usage details [3.5].
- **BuildInformation**: In *PackageIdentity*, this describes the build of the package as a whole. In content element *Identity*, this describes the build of the artifact(s) and the content element describing the artifact.
- 882 See the *BuildInformationType* section for structure and additional usage details [3.7].
- 883 Manufacturer: See the *ManufacturerType* section for structure and additional usage details [3.8].
- softwareID: The software identified by softwareID is the software whose deployment is described by the SDD. When the manufacturer maintains software identifiers within a sales and distribution system, the softwareID SHOULD correspond to an identifier for the software within that system. If a format for software identifiers is not pre-existing within the manufacturer's systems, a UUID SHOULD be used for softwareID. When a UUID is used, it MUST be unique within the domain in which the described software is used.

890 3.5 MaintenanceInformationType

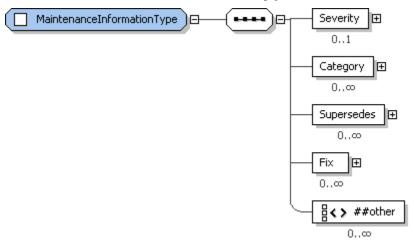


Figure 6: MaintenanceInformationType structure.

891 892

893

894

895

896

897

898 899

900

901

902

903

904

905

906 907

908

909

910 911

912

913

If the package provides maintenance for deployed software, *MaintenanceInformation* declares information about the fix or fixes provided. If the package content is a single fix, *MaintenanceInformation* describes the information about that one fix. If the content is a collection of fixes—for example, a fix pack— *MaintenanceInformation* describes each of the fixes provided by the fix pack.


3.5.1 MaintenanceInformationType Property Summary

Name	Data Type	*	Description
Severity	DisplayTextType	01	Severity of the maintenance content.
Category	DisplayTextType	0*	Category of the maintenance content.
Supersedes	MaintenanceInformationType	0*	A previously released fix that is superseded by application of this maintenance.
Fix	FixIdentityType	0*	An included fix.
	xsd:any	0*	

3.5.2 MaintenanceInformationType Property Usage Notes

- Severity: This value SHOULD correspond to a severity value used within the SDD provider's support system. It serves as a hint to the deployer about the urgency of applying the described maintenance.
 See the DisplayTextType section for structure and additional usage details [4.14.3].
- Category: These values SHOULD correspond to maintenance categories within the SDD provider's support system.
 - See the *DisplayTextType* section for structure and additional usage details [4.14.3].
- **Supersedes**: Superseded fixes are ones that fix a problem also fixed by the superseding maintenance package or content element and therefore need not be applied.
 - This element does not indicate whether or not the superseded fix needs to be removed. To indicate that the previous fix must be removed before the superseding maintenance can be applied successfully: the SDD author can create a requirement stating that the fix must not be present.
 - Superseded fixes MAY include all the information defined in *MaintenanceInformationType*. At a minimum, a superseded fix MUST include at least one *Fix* element with the name of the superseded fix defined.
- Fix: Fix elements provide information about individual fixes provided by the maintenance content.

915 3.6 FixIdentityType

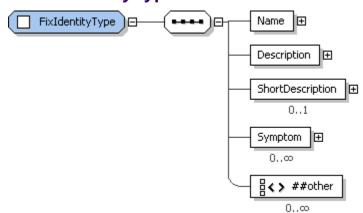

916 917

918

919

920

922

923

924

925

926

914

Figure 7: FixIdentityType structure.

Elements of *FixIdentityType* describe fixes that will be applied when the package is deployed or the content element is applied.


3.6.1 FixIdentityType Property Summary

Name	Туре	*	Description
Name	xsd:NMTOKEN	1	A name for the fix which is, at a minimum, unique within the scope of the resource fixed.
Description	DisplayTextType	1	A complete description of the fix.
ShortDescription	DisplayTextType	01	An abbreviated description of the fix.
Symptom	DisplayTextType	0*	A symptom of the problem fixed.
	xsd:any	0*	

921 3.6.2 FixIdentityType Property Usage Notes

- Name: The Name element MUST provide a value that uniquely identifies a fix within a scope defined by the manufacturer. This is a name provided by the manufacturer that corresponds to the fix name as understood in the deployment environment.
- **Description**, **ShortDescription**: These elements MAY be used to provide human-understandable information. If used, they MUST provide a description of the fix.
- 927 The Description element MUST be defined if the ShortDescription element is defined.
- See the *DisplayTextType* section for structure and additional usage details [4.14.3].
- Symptom: Symptom strings can be used to correlate a fix with one or more experienced problems.
 See the *DisplayTextType* section for structure and additional usage details [4.14.3].

3.7 BuildInformationType



932 933

931

Figure 8: BuildInformationType structure.

3.7.1 BuildInformationType Property Summary

Name	Туре	*	Description	
buildID	xsd:token	1	Identifies the build of the package or package element.	
	xsd:anyAttribute	0*		

937 3.7.2 BuildInformationType Property Usage Notes

buildID: The buildID attribute is an identifier provided by the manufacturer and meaningful to developers that can be used to identify a build of the defining element. This information MUST correspond with information known in the manufacturer's build environment. It is traditionally used during problem determination to allow maintainers of the software to determine the specifics of package creation. Inclusion of buildID in the SDD allows the end user to provide this information to package maintainers, enabling them to correlate the deployed software with a particular known build of the software.

3.8 ManufacturerType

934

935

936

938

939

940 941

942 943

944

945

946 947

948

949

950

951 952

953

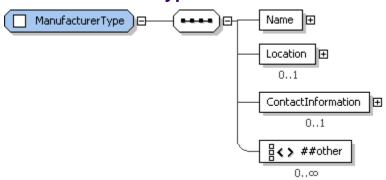


Figure 9: ManufacturerType structure.

The SDD author can include information about the package manufacturer that includes name, location and contact information such as the address of the manufacturer's Web site or telephone number.

3.8.1 ManufacturerType Property Summary

Name	Туре	*	Description
Name	DisplayTextType	1	A translatable name for the manufacturer.
Location	LocationType	01	The address and country of the manufacturer.
ContactInformation	DisplayTextType	01	Contact information for the manufacturer.
	xsd:any	0*	

3.8.2 ManufacturerType Property Usage Notes

- Name: The value provided in the Name element MUST be an identifiable name of the manufacturer
 of the SDD.
- 954 See the *DisplayTextType* section for structure and additional usage details [4.14.3].
- 955 Location: See the LocationType section for structure and additional usage details [3.9].

- 956 ContactInformation: This element MAY provide additional contact information for the named 957 manufacturer, such as a support Web site address or a technical support telephone number.
- 958 See the DisplayTextType section for structure and additional usage details [4.14.3].

3.9 LocationType

959

960 961

962

963

965

967

978

979




Figure 10: LocationType structure.

LocationType supports inclusion of the manufacturer's address and country in package and content element identity.

3.9.1 LocationType Property Summary 964

Name	Туре	*	Description	
Address	DisplayTextType	01	The manufacturer's address.	
Country	DisplayTextType	01	The manufacturer's country.	

3.9.2 LocationType Property Usage Notes

- 966 Address: This is the mailing address or the physical address.
 - See the DisplayTextType section for structure and additional usage details [4.14.3].
- Country: Recording the manufacturer's country in the SDD provides information that may be of 968 969 interest in relation to import and export of software.
- 970 See the DisplayTextType section for structure and additional usage details [4.14.3].

3.10 VersionType 971

- 972 VersionType provides the type definition for version elements in the package descriptor and deployment
- 973 descriptor. It is a simple type that is based on xsd:string with no further restrictions. This means that
- versions in the SDD are represented simply as strings. Because resource versions exist in the 974
- deployment environment, their formats and semantics vary widely. For this reason, the format and 975
- semantics of versions are not defined by this specification. 976

3.11 ContentsType 977




Figure 11: Contents structure.

ContentsType is used in PackageDescriptor to provide a list of one or more Content elements. 980

3.11.1 ContentsType Property Summary 981

Name	Туре	*	Description
Content	ContentType	1*	Describes the physical contents of the software package.

3.11.2 ContentsType Property Usage Notes

• **Content:** A *PackageDescriptor* MUST contain a *Contents* element that is a list of one or more *Content* elements.

See the ContentType section for structure and additional usage details [3.12].

3.12 ContentType

982 983

984

985

986

987 988

989

990

991 992

993 994

995

996 997

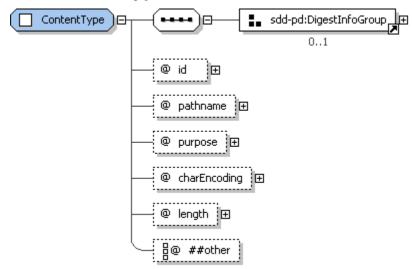


Figure 12: ContentType structure.

A software package includes one or more content files. *ContentType* defines the properties of a content file included in the package descriptor. Content defined in the package descriptor as part of the software package does not need to be physically co-located. Each element MUST be in a location that can be identified by a URI. The *pathname* attribute of each content file defines a URI for accessing the file. Characteristics of the content files—such as their length, purpose and character encoding—MAY be declared in the package descriptor.

3.12.1 ContentType Property Summary

Name	Data Type	*	Description
ds:DigestMethod	ds:DigestMethodType	01	Specifies the digest method applied to the file.
ds:DigestValue	ds:DigestValueType	01	Specifies the Base64-encoded value of the digest of the file.
id	xsd:ID	1	An identifier used in deployment descriptors to refer to the file definition in the associated package descriptor.
pathname	xsd:anyURI	1	The absolute or relative path of the content file including the file name.
purpose	ContentPurposeType	01	Associates a purpose classification with a file. **default value="content"
charEncoding	xsd:string	01	Specifies the character encoding of the contents of the file.
length	xsd:nonNegativeInteger	01	Specifies the size of the file in bytes.
	xsd:anyAttribute	0*	

3.12.2 ContentType Property Usage Notes

ds:DigestMethod, ds:DigestValue: These values MAY be used to assist with file verification.

- 998 See the *DigestInfoGroup* section for structure and additional usage details [3.13].
- 999 id: This is the identifier for the content that is used as a reference in artifact elements in the deployment descriptor.
- The *id* attribute may be useful to software that processes the SDD, for example, for use in creating log and trace messages.
- pathname: pathname is used to access content in the package. The path of the file MUST be a URI that specifies an absolute path or a path relative to the location of the package descriptor. It MUST include the file name.
 - purpose: The purpose attribute enables the PackageDescriptor author to associate a classification with a file. The classification identifies the file as having a specific purpose. ContentPurposeType defines a union of SDDContentPurposeType with xsd:NCName. The purpose value MAY be chosen from one of the following values enumerated in SDDContentPurposeType or be a valid NCName value provided by the SDD author. If purpose is not specified, the default value is content.

Enumerated values for purpose are:

1006 1007

1008

1009 1010

1011

1012

1013

1014

1015

1016

1017

1018

1019 1020

1021

1022

10231024

1025

1026

1027

1028


1030

1031

1035

- **readMe:** A file with information about the package. An implementation may choose to display this to a user as part of the deployment process.
- **endUserLicenseAgreement:** A file containing an end user license agreement. An implementation may choose to display this to a user as part of the deployment process.
- responseFile: A file that contains input values for an operation.
- **deploymentDescriptor**: An XML file containing the *DeploymentDescriptor* definition associated with the *PackageDescriptor*. A valid *PackageDescriptor* MUST have exactly one *Content* element with a *purpose* value of *deploymentDescriptor*.
- **packageDescriptor**: Supports aggregation of packages. This is used to reference a *packageDescriptor* of an aggregated package.
- **descriptorLanguageBundle:** A file containing translations of text defined directly in the package descriptor or its associated deployment descriptor.
- content: A file used during deployment of solution content. This is the default value for purpose.
- charEncoding: This attribute need only be used for files that a run-time is required to render.
 Common charEncoding values include "ASCII", "UTF-8", "UTF-16" and "Shift_JIS". For an extensive list of character encodings, see [IANA-CHARSET].
- 1029 **length**: The file length MAY be used for simple file verification.

3.13 DigestInfoGroup



1032 Figure 13: DigestInfoGroup structure.

When digest information is used to sign a content file, both the digest method and the digest value MUST be provided.

3.13.1 DigestInfoGroup Property Usage Notes

- ds:DigestMethod, ds:DigestValue: ds:digestMethod and ds:digestValue MAY be used to digitally sign individual files. If files are signed, the digest value MUST be calculated over the whole of each file.
- See [XMLDSIG-CORE] for details on the usage of ds:DigestMethod and ds:DigestValue.

4 Deployment Descriptor

A solution package contains a deployment descriptor in addition to a package descriptor. The deployment descriptor describes the topology, selectability, inputs, requirements and conditions of the deployment. The deployment descriptor is associated with a package descriptor and refers to content files in that package descriptor.

4.1 DeploymentDescriptor

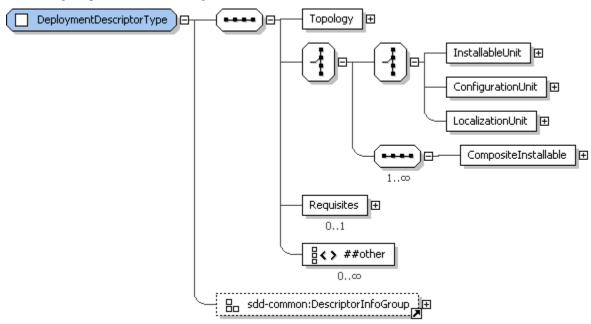


Figure 14: DeploymentDescriptor structure.

DeploymentDescriptor is the top level element of a deployment descriptor. The DeploymentDescriptor defines the information required to support deployment of the package contents. This includes the Topology, which declares all of the resources that may participate in deployment. It also includes one atomic content element or one or more CompositeInstallable content elements. Atomic content elements are InstallableUnit, ConfigurationUnit, or LocalizationUnit. Atomic content elements define artifacts that can be processed to deploy software resources. They are atomic because they cannot aggregate other content elements. A CompositeInstallable element is the root of a content element hierarchy that defines content that performs the one deployment operation supported by the CompositeInstallable. A CompositeInstallable can define base, selectable and localization content as well as the aggregation of other content elements.

4.1.1 DeploymentDescriptor Property Summary

1058

10591060

1061

1062

1063

1064 1065

1066

Name	Data Type	*	Description
Topology	TopologyType	1	Defines resources that are required, created or modified by deployment.
InstallableUnit	InstallableUnitType	01	Defines content that installs, updates and/or uninstalls resources. When an InstallableUnit is defined, no ConfigurationUnit, LocalizationUnit or CompositeInstallable elements can be defined.
ConfigurationUnit	ConfigurationUnitType	01	Defines content that configures resources. When a ConfigurationUnit is defined, no InstallableUnit, LocalizationUnit or CompositeInstallable elements can be defined.
LocalizationUnit	LocalizationUnitType	01	Defines content that installs, updates and/or uninstalls translated materials. When a LocalizationUnit is defined, no InstallableUnit, ConfigurationUnit or CompositeInstallable elements can be defined.
CompositeInstallable	CompositeInstallableType	0*	Defines a hierarchy of base, selectable and/or localization content used to perform one deployment lifecycle operation. When one or more CompositeInstallable elements are defined, no InstallableUnit, ConfigurationUnit or LocalizationUnit elements can be defined.
Requisites	RequisitesType	01	A list of references to SDD packages that can optionally be deployed to satisfy deployment requirements of the defining SDD.
	xsd:any	0*	
schemaVersion	xsd:string	1	The descriptor complies with this version of the Solution Deployment Descriptor Specification. **fixed value="1.0"
descriptorID	UUIDType	1	Identifier of the deployment descriptor for a particular set of deployable content.
lastModified	xsd:dateTime	1	The time the descriptor was last modified.
descriptorLanguageBundle	xsd:token	01	The root name of language bundle files containing translations for display text elements in the deployment descriptor.
	xsd:anyAttribute	0*	

4.1.2 DeploymentDescriptor Property Usage Notes

■ **Topology**: *Topology* provides a logical view of all resources that may participate in any particular deployment. A resource can participate by being required, created or modified by the deployment. A required resource MAY also play the role of target resource, meaning that it can process artifacts to perform some portion of the deployment. The resources that actually participate in a particular deployment are determined by the user inputs, selections and resource bindings provided during that deployment.

See the *TopologyType* section for structure and additional usage details [4.2.1].

- InstallableUnit, ConfigurationUnit, LocalizationUnit, CompositeInstallable: A simple software deployment that uses a single artifact for each supported deployment operation MAY be described using an SDD that defines a single atomic content element—InstallableUnit, ConfigurationUnit or LocalizationUnit.
- A software deployment that requires multiple artifacts, aggregates other deployment packages or has selectable content MAY be described using an SDD that defines one or more *CompositeInstallable* elements. Each *CompositeInstallable* MUST describe one deployment lifecycle operation for the package.
- See the respective sections (*InstallableUnitType* [4.3.1], *ConfigurationUnitType* [4.3.2], LocalizationUnitType [4.13.2] and *CompositeInstallableType* [4.9.1]) for structure and additional usage details.
- **Requisites**: When the package author chooses to provide deployment packages for required software, those packages are described by *Requisite* elements in *Requisites*.
- Including requisite packages in the SDD package MAY provide a convenient way for the deployer to satisfy one or more SDD requirements.
- See the *RequisitesType* section for structure and additional usage details [4.10.5].
- schemaVersion, descriptorID, lastModified, descriptorLanguageBundle: These attributes can be useful to tooling that manages, creates or modifies deployment descriptors and to tooling and deployment software that displays information from the deployment descriptor to humans.
- See the *DescriptorInfoGroup* section for structure and additional usage details [3.2].

4.2 Topology

1087

- The SDD's topology describes all the resources that may be required, created or modified when any of the deployment operations supported by the SDD are performed.
- Primary identifying characteristics of the resources can be defined in topology. Constraints beyond these primary characteristics are not defined in topology; they are defined in content elements that reference the resource definitions in topology.
- The topology includes identification of *hosts–hostedBy* relationships between resources. When both resources in that relationship participate in a particular deployment, the relationship is considered a requirement for that deployment.
- 1096 It is possible that only a subset of the resources described in topology will play a role in a particular deployment. This is determined by the selection of content elements for the particular deployment. The resources that are required, created or modified by the content elements in scope for the deployment are the ones that will participate in the deployment and so are associated with resources in the deployment environment.
- 1101 At deployment time, definitions of the resources that participate in that particular deployment are
- 1102 associated with actual resource instances in the deployment environment. The mechanisms for
- associating resource definitions with resource instances are not described by the SDD. The SDD
- 1104 metadata describes the characteristics of the participating resources. Whether associations of resource
- instances with matching characteristics are made by user choice or entirely by software does not affect
- 1106 the success of the deployment. Resource characteristics used when making this association include
- 1107 those defined in topology plus all those defined in constraints on the resource in the content elements that
- are in scope for the particular deployment.
- 1109 Some topologies are variable. That is, a particular set of logical resources of the same type in the
- topology might be associated with different physical resource instances or the same physical resource
- during deployment. In this case, a separate logical resource definition is created in topology for each
- 1112 possible physical resource instance. Uniqueness constraints can then be used to describe the conditions
- 1113 under which the separate resources can be associated with a single resource.
- 1114 All resource definitions in the SDD are in topology. All other descriptions of resources in the SDD are
- references to the resource definitions in the topology.

1116 4.2.1 TopologyType

1117

1119

1120

1121


1122

1123

1124

1125 1126

1127



1118 Figure 15: TopologyType structure.

The *Topology* element defines one or more hierarchies of resource specifications that describe the resources that MAY play a role in the deployment of the contents of the solution package. These resource specifications do not identify specific resource instances in a specific deployment environment. Instead, they are logical specifications of resources that can be associated with specific resource instances in the deployment environment for a particular deployment based on the described resource identity characteristics. These resources have a role in a particular solution deployment only when they are required, created or modified by a content element, or referred to by a variable, in that particular solution deployment.

4.2.1.1 TopologyType Property Summary

Name	Туре	*	Description
Resource	ResourceType	1*	The root of a tree of resources that play a role in the solution.
	xsd:any	0*	

1128 **4.2.1.2 TopologyType Property Usage Notes**

- Resource: The SDD author's decision to model a resource in the deployment environment as a resource in the SDD depends on the need to know about that resource when planning for deployment, aggregating, deploying and managing the resource lifecycle using the SDD. All resources required by the solution SHOULD be included. For all *Requirements* declared in the SDD, resources MUST be specified. Resources referred to by *ResultingResource* or *ResultingChange* elements MUST also be included. The more complete the SDD is, the more useful it will be in guiding successful deployment.
- 1136 See the ResourceType section for structure and additional usage details [4.2.2].

4.2.2 ResourceType

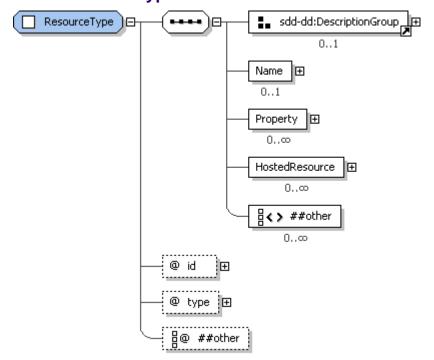


Figure 16: ResourceType structure.

Elements of ResourceType—both the top level Resource elements and the HostedResource elements within the resource hierarchy—make up the topology of an SDD. Each Resource element declares, at a minimum, the type of the resource. Values for resource type are not defined by this specification. A core assumption of this specification is that an understanding of specific resource types and resource characteristics are shared by the deployment descriptor author and the deployment software. Therefore, if the deployment descriptor author declares a new resource type, then deployment software operating on the SDD needs to understand how to handle that resource type.

In addition to defining type, the resource elements MAY specify a name and other identity properties that can be used to identify instances of the resource in the deployment environment. The resource identity elements, *Name* and *Property*, are optional and MAY be specified in content elements rather than in topology. Identity properties used in the resource specification in topology MUST be those that do not change during deployment, even when the resource is updated. Because resource versions can often change during an update, there is no version element in resource specifications in *Topology*. Values can be defined for resource name and resource properties that help to identify the resource. These represent the basic identity of the resource and are true for all uses of the resource in the solution.

Resource Type provides the type definition for the Resource and HostedResource elements defined in Topology. All resources MAY nest resource definitions for resources that they host. To host a resource means to provide the execution environment for that resource.

For example, an operating system provides the execution environment for software, and a database engine provides the execution environment for a database table. The operating system hosts the software and the database engine hosts the database table.

Each resource in these hierarchies may play a role in solution deployment.

Content elements determine a resource's participation and role(s) in a particular solution deployment. Content elements can refer to resources in *Topology* in several ways. A resource can be identified via xsd:IDREF:

 as the target of the content element's artifacts. A target resource is a resource that is capable of processing a particular artifact. A target resource is often, but not always, the host of the resources created by the artifacts it processes. For example, an operating system may be the target of an artifact that is a zip file. When the files are unzipped, the file system resource is the host of those files.

See the *targetResourceRef* attribute in the *InstallableUnitType* [4.3.1], *ConfigurationUnitType* [4.3.2] and *LocalizationUnitType* [4.13.2] sections.

- as the required base for an update applied by the artifact referenced by the content element. See the *RequiredBaseType* section [4.7.8].
- as the resource that will be created by deploying the artifact referenced by the content element. See the *ResultingResourceType* section [4.8.1].
- as the resource that will be changed by deploying the artifact referenced by the content element. See the *ResultingChangeType* section [4.8.2].
- as the localization base for translated materials. The localization base is the resource that is localized by deploying the translated materials.
 - See the LocalizationBase element in the LocalizationUnitType section [4.13.2].
- as a required resource named in the content element's Requirements.
 See the RequirementsType section [4.7.1].
- to establish a variable value from a resource property.
 See the ResourcePropertyType section [4.6.12].

One resource MAY be referred to by any number of content elements and can be identified to play any or all of the roles just listed. When a content element participates in a particular solution deployment, the resources it references participate in that solution deployment and are associated with resource instances in the deployment environment.

4.2.2.1 ResourceType Property Summary

1170

1171

11721173

11741175

11761177

1178

1179

1180

1181 1182

1183

1184

1185

1186

1187

1188

1189

1190

Name	Туре	*	Description
Description	DisplayTextType	01	A description of the resource and its role in the solution described by the SDD.
ShortDescription	DisplayTextType	01	A short description of the resource and its role.
Name	VariableExpressionType	01	The name of the resource as known in the deployment environment.
Property	PropertyType	0*	An identity property of the resource.
HostedResource	ResourceType	0*	A resource that participates in the solution and that is hosted by the defining resource.
	xsd:any	0*	
id	xsd:ID		An identifier of the resource scoped to the descriptor.
type	ResourceTypeNameType		A well-known resource type.
	xsd:anyAttribute	0*	

4.2.2.2 ResourceType Property Usage Notes

- **Description, ShortDescription**: If used, these elements MUST provide a human-readable description of the resource.
- The Description element MUST be defined if the ShortDescription element is defined.
- 1194 See the *DescriptionGroup* section for structure and additional usage details [4.14.1].

1195 • Name: The resource name is an identifying characteristic of the resource that correlates with a name for the resource in the deployment environment.

1197

1198

1199

1200

1201

1202 1203

1204

1205

1206

1207 1208

1209

1210

1211

1212

1213

1214

1215 1216

1217

1225

1226

1227

1228

1232

1233

The type of the *Name* element, *VariableExpressionType*, allows the resource name to be expressed as a simple string or in terms of a user input parameter or other variable.

An example of a good use of a variable expression in *Resource.Name* is to make sure that the installation directory is hosted on a file system that has sufficient space available for deployment. In this example, the file system resource element would define a *HostedResource* element for the directory. The *Name* of the directory would be expressed as a variable expression that refers to a user input parameter for installation location. Content elements that use the installation directory would express a requirement on the directory and on the file system with the additional constraint that the file system have a certain amount of available space (to satisfy the consumption constraints). The fact that both resources are required and that they are defined with a *hosts-hostedBy* relationship in *Topology*, means that the directory that is used must be the installation directory and it must be hosted by a file system that meets the consumption constraint for available space.

Only the *Variable* elements defined in a top level content element can be used to define a resource *Name*, because these are the only variables visible within *Topology*.

If the name of a resource is changed during deployment, for example, during an update, then the resource name SHOULD NOT be included in the resource specification. Instead, the pre-update resource name SHOULD be specified in the *RequiredBase* element of the installable unit that provides the update, and the post-update name SHOULD be specified in the *ResultingResource* element of the same installable unit.

- See the VariableExpressionType section for structure and additional usage details [4.6.1].
- Property: Property elements SHOULD be used when Name alone is not sufficient to identify the resource. The property used represents an identifying characteristic of a resource.
- 1220 See the *PropertyType* section for structure and additional usage details [4.2.3].
- HostedResource: A Resource MAY define HostedResource elements. Each HostedResource element is an instance of ResourceType. When both the host and the hosted resource participate in a particular solution deployment, the associated resource instances selected for use during that deployment must have a hosts relationship.
 - For example, a Web application declared to be hosted on a Web server must be hosted on the instance of the Web server that is selected for use during the deployment.
 - If only the host resource is identified by the *DeploymentDescriptor's* content elements as participating in the solution, then there is no assumption that the hosted resource exists.
- id: The *id* attribute uniquely identifies the resource element within the *DeploymentDescriptor*. This *id* value is used by other elements in the *DeploymentDescriptor* to refer to this resource. This value is created by the descriptor author.
 - The *id* attribute may be useful to software that processes the SDD, for example, for use in creating log and trace messages.
- 1234 type: The type attribute defines the class of resource. The value of type correlates with the resource type known for the resource in the deployment environment. ResourceTypeNameType restricts type 1235 to valid xsd:QNames. The values for type are not defined by this specification. Creators of 1236 DeploymentDescriptors rely on knowledge of resource types that are understood by supporting 1237 1238 infrastructure in the target environment. To honor the descriptor author's intent, the deploying infrastructure must be able to discover the existence of resources of the types defined in the SDD: the 1239 1240 values of the resource's properties; and the existence and type of resource relationships. The 1241 deploying infrastructure also needs to understand how to use the artifact types associated with the 1242 resource type to create, modify and delete the resource.

1243 4.2.3 PropertyType

1244 1245

1246

1247

1248

1257

1259

1260

1261

1262




Figure 17: PropertyType structure.

PropertyType provides the type definition for elements used to declare an identity property of a resource, namely, the *Property* elements of *Resource* and *HostedResource* in *Topology*. It also provides the type definition for *Property* elements in *Relationship* and *RelationshipConstraint*.


4.2.3.1 PropertyType Property Summary

Name	Туре	*	Description
PropertyName	xsd:QName	1	The property name.
Value	VariableExpressionType	1	The property value.
	xsd:anyAttribute	0*	

1250 4.2.3.2 PropertyType Property Usage Notes

- PropertyName: The *PropertyName* MAY be used to provide additional identification for the resource in the deployment environment.
- The *PropertyName* MAY be used to provide constraints on the configuration of a resource.
- 1254 Value: Evaluation of the *Value* expression provides the value of the property.
- See the *VariableExpressionType* section for structure and additional usage details [4.6.1].

1256 **4.2.4 ResultingPropertyType**



1258 Figure 18: ResultingPropertyType structure.

ResultingPropertyType provides the type definition for elements used to declare an identity property of a resulting resource or to declare a configuration change to a resource property which results from deployment of an artifact.

4.2.4.1 ResultingPropertyType Property Summary

Name	Туре	*	Description
PropertyName	xsd:string	1	The resulting property name.
Value	VariableExpressionType	1	The resulting property value.
	xsd:anyAttribute	0*	Additional attributes of the resulting property.

4.2.4.2 ResultingPropertyType Property Usage Notes

- PropertyName: The *PropertyName* MAY be used to provide additional identification for the resource in the deployment environment.
- 1266 The *PropertyName* MAY be used to declare a configuration change to a resource.
- Value: Evaluation of the *Value* expression provides the value of the resulting property.
- See the *VariableExpressionType* section for structure and additional usage details [4.6.1].

4.3 Atomic Content Elements

1263

1269

1286

1287

1288

1289

1290 1291

1292

1293

1294

1295

1296

1297

1298

1299

1300

1301


1302

1303

1304

- The package descriptor defines package content that includes artifacts whose processing results in deployment of the software package. The deployment descriptor defines metadata associated with those artifacts. The metadata includes conditions, requirements, results, inputs, outputs and completion actions. Metadata throughout the deployment descriptor is associated with package content in the definition of
- 1274 atomic content elements. The atomic content elements are *InstallableUnit*, *ConfigurationUnit* and
- 1274 atomic content elements. The atomic content elements are installableorit, Configurationomic
- 1275 LocalizationUnit. These are the only content elements that define Artifacts elements.
- Artifact elements identify an artifact file or set of files defined in package content whose processing will
 perform all or a portion of the deployment for a particular deployment lifecycle operation. The name of the
 artifact element indicates the operation supported by the artifact. Names of the artifact elements are
 created by prefixing "Artifacts" with the operation name. The artifacts defined for use in the SDD are
 InstallArtifact, UpdateArtifact, UndoArtifact, UninstallArtifact, RepairArtifact and ConfigArtifact.
- Artifact elements define the inputs and outputs, substitution values and types associated with the artifact files. The content element's target resource, identified by targetResourceRef, processes the artifact files with the defined inputs to perform deployment operations. Examples of artifact types include zip files, rpm files and executable install files. Artifact types are not defined by this specification. The artifact types defined in the SDD need to be understood by software that processes the SDD.
 - There MAY be multiple atomic content elements within a composite installable that describe the deployment of multiple resources as part of a single software deployment or there MAY be a single atomic content element (singleton) in the deployment descriptor that describes the entirety of a simple deployment. When an atomic content element is used in a *CompositeInstallable*, it MUST define exactly one artifact. When an atomic content element is a singleton, it MUST define at least one artifact element and MAY define one of each type of artifact element allowed for its type. The inclusion of an artifact element in a singleton atomic content element implies support for the associated operation.
 - For example, a singleton *ConfigurationUnit* that defines a *ConfigArtifact* associates a configure operation with the *ConfigArtifact*. Similarly, an SDD with a singleton *InstallableUnit* that defines an *InstallArtifact* and an *UpdateArtifact* associates an *install* operation with the *InstallArtifact* and an *update* operation with the *UpdateArtifact*.
 - When an atomic content element is defined within a *CompositeInstallable* hierarchy, its one artifact MUST support the single top level operation associated with the *CompositeInstallable*. The single artifact defined need not be an artifact for the operation defined for the *CompositeInstallable*.
 - For example, in a *CompositeInstallable* that defines metadata for an *update* operation, there may be one *InstallableUnit* that defines an *InstallArtifact* element and another *InstallableUnit* that defines an *UpdateArtifact* element. Both of these artifacts are used when performing the overall *update* operation defined for the *CompositeInstallable*.

1305 4.3.1 InstallableUnitType

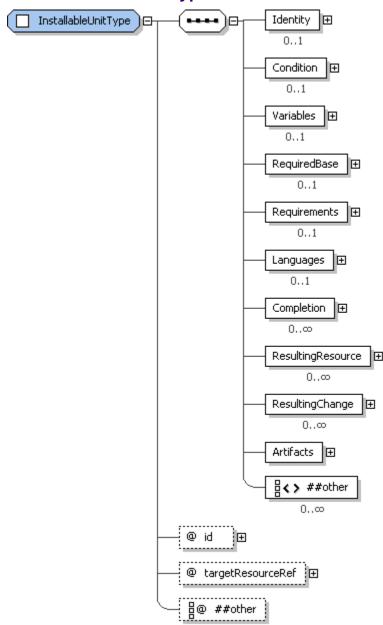

1306 1307

1308

1309

1310

Figure 19: InstallableUnitType structure.

The *InstallableUnit* element is an atomic content element that defines artifacts that install or update software and defines requirements for applying those artifacts. It may also define artifacts that undo an update or that uninstall or repair existing software.

4.3.1.1 InstallableUnitType Property Summary

Name	Туре	*	Description
Identity	IdentityType	01	Human-understandable identity information about the InstallableUnit.
Condition	ConditionType	01	A condition that determines if the content element is relevant to a particular deployment.
Variables	VariablesType	01	Variables for use within the InstallableUnit's requirements and artifact

			definitions.
RequiredBase	RequiredBaseType	01	A resource that will be updated when the InstallableUnit's UpdateArtifact is processed.
Requirements	RequirementsType		Requirements that must be met prior to successful processing of the InstallableUnit's artifacts.
Languages	LanguagesType	01	Languages supported by the InstallableUnit.
Completion	oletion CompletionType		Describes completion actions such as restart and the conditions under which the action is applied.
ResultingResource	nurce ResultingResourceType		A resource that will be installed or updated by processing the InstallableUnit's artifacts.
ResultingChange	ltingChange ResultingChangeType		A resource that will be configured by processing the InstallableUnit's artifacts.
Artifacts InstallationArtifactsType		1	The set of artifacts associated with the InstallableUnit.
	xsd:any	0*	
id xsd:ID		1	An identifier for the InstallableUnit scoped to the deployment descriptor.
targetResourceRef	xsd:IDREF	1	Reference to the resource that can process the InstallableUnit's artifacts.
	xsd:anyAttribute	0*	

4.3.1.2 InstallableUnitType Property Usage Notes

13121313

1314

1315

1316

1317 1318

1319

13201321

1322

1323

1324

1325

• **Identity**: The *InstallableUnit's Identity* element defines human-understandable information that reflects the identity of the solution as understood by the end user of the solution.

If the *InstallableUnit* defines a resulting resource, the *Identity* of the *InstallableUnit* SHOULD reflect the identity of the resulting resource.

When the *InstallableUnit* is the only content element in the deployment descriptor, its *Identity* MAY define values that are the same as the corresponding *PackageIdentity* element values.

This would be useful, for example, in a case where the package is known by the same name as the resource created by the *InstallableUnit*.

See the *IdentityType* section for structure and additional usage details [3.4].

• **Condition**: A *Condition* is used when the *InstallableUnit's* content should be deployed only when certain conditions exist in the deployment environment.

For example, one *InstallableUnit* may be applicable only when the operating system resource is resolved to a Linux®² operating system during deployment. The *InstallableUnit* would define a

sdd-spec-v1.0-os.doc Copyright © OASIS® 2007, 2008. All Rights Reserved.

² Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries.

- 1326 Condition stating that the type of the operating system must be Linux for the *InstallableUnit* to be considered in scope for a particular deployment.
- See the *ConditionType* section for structure and additional usage details [4.5.1].
- Variables: An InstallableUnit's Variables element defines variables that are used in the definition of the InstallableUnit's requirements and in parameters and properties passed to the InstallableUnit's target resource.
- When the deployment descriptor defines a single *InstallableUnit* at the top level, that is, not inside a *CompositeInstallable*, the variables it defines MAY be referred to by any element under *Topology*.
- See the *VariablesType* section for structure and additional usage details [4.6.3].
- **Languages**: When translated materials are deployed by the *InstallableUnit's* artifacts, the languages of the translations are listed in *Languages*.
- See the *LanguagesType* section for structure and additional usage details [4.13.6].

1340

1347 1348

1349

1353

1364

1365 1366

1367

1368

1369

1370

- **RequiredBase**: When an *InstallableUnit* can be used to update resources, the *RequiredBase* element identifies the resources that can be updated.
 - See the RequiredBaseType section for structure and additional usage details [4.7.8].
- **Requirements**: Requirements specified in an InstallableUnit identify requirements that must be met prior to successful processing of the InstallableUnit's artifacts.
- 1343 See the *RequirementsType* section for structure and additional usage details [4.7.1].
- **Completion**: A *Completion* element MUST be included if the artifact being processed requires a system operation such as a reboot or logoff to occur to function successfully after deployment or if the artifact executes a system operation to complete deployment of the contents of the artifact.
 - There MUST be an artifact associated with the operation defined by a *Completion* element.
 - For example, if there is a *Completion* element for the *install* operation, the *InstallableUnit* must define an *InstallArtifact*.
- 1350 See the *CompletionType* section for structure and additional usage details [4.3.14].
- 1351 **ResultingResource**: An *InstallableUnit's ResultingResource* element identifies the resources in *Topology* that will be installed or updated when the *InstallableUnit's* artifacts are processed.
 - See the ResultingResourceType section for structure and additional usage details [4.8.1].
- ResultingChange: Multiple content elements within the SDD MAY specify the same resource in their
 ResultingChange elements. In this case each content element is capable of modifying the configuration of that resource.
- An example use of the *ResultingChange* element is to understand whether or not one content element can satisfy the requirements specified in another content element.
- 1359 See the ResultingChangeType section for structure and additional usage details [4.8.2].
- Artifacts: When the *InstallableUnit* is a singleton defined outside of a *CompositeInstallable*, it MUST define at least one artifact element and MAY define one of each type of artifact element allowed for its type. The inclusion of an artifact element in a singleton *InstallableUnit* implies support for the associated operation.
 - When the *InstallableUnit* is defined within a *CompositeInstallable*, it MUST define exactly one artifact. The artifact defined MAY be any artifact allowed in an *InstallableUnit* and it MUST support the single top level operation defined by the *CompositeInstallable*. This does not mean the operation associated with the artifact has to be the same as the one defined by the *CompositeInstallable*.
 - For example, an update of a resource may be required to support an install of the overall solution, in which case the *InstallableUnit* would define an *UpdateArtifact* to support the top level *install* operation.
- See the *InstallationArtifactsType* section for structure and additional usage details [4.3.4].
- id: The *id* attribute is referenced in features to identify an *InstallableUnit* selected by the feature and *Dependency* elements to indicate a dependency on processing of the content element.

- 1374 The id attribute may be useful to software that processes the SDD, for example, for use in creating 1375 log and trace messages.
- 1376 targetResourceRef: The targetResourceRef attribute identifies the resource that will process the 1377 InstallableUnit's artifacts.
- 1378 The resources created or modified by artifact processing are frequently, but not necessarily, hosted 1379 by the target resource.
- 1380 This value MUST match an id of a resource element in Topology.
- 1381 The target may be a resource that has not yet been created. In this case, there is a dependency on the complete installation of the target resource prior to applying the InstallableUnit. This dependency 1382
- 1383 MUST be represented in a Dependency element within Requirements that apply to the
- 1384 InstallableUnit.

1385

1386 1387

1388

1389

1390

4.3.2 ConfigurationUnitType

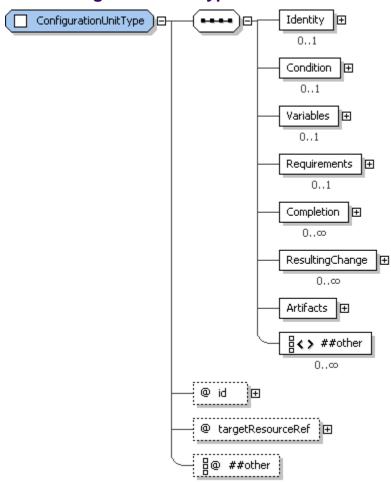


Figure 20: ConfigurationUnitType structure.

The ConfigurationUnit element defines artifacts that configure one or more existing resources. It also defines the requirements for applying those artifacts. It MUST NOT install, update, or uninstall resources.

4.3.2.1 ConfigurationUnitType Property Summary

Name	Туре	*	Description
Identity	IdentityType	01	Human-understandable identity information about the ConfigurationUnit.

Condition	ConditionType	01	A condition that determines if the content element is relevant to a particular deployment.
Variables	VariablesType	01	Variables for use within the ConfigurationUnit's requirement and artifact definitions.
Requirements	RequirementsType	01	Requirements that must be met prior to successful processing of the ConfigurationUnit's artifacts.
Completion	CompletionType	0*	Describes completion actions such as restart and the conditions under which the action is applied.
ResultingChange	ResultingChangeType	0*	A definition of changes made to a resource that is configured by processing the ConfigurationUnit's ConfigArtifact.
Artifacts	ConfigurationArtifactsType	1	The artifact associated with the ConfigurationUnit.
	xsd:any	0*	
id	xsd:ID		An identifier for the ConfigurationUnit scoped to the deployment descriptor.
targetResourceRef	urceRef xsd:IDREF		Reference to the resource that can process the ConfigurationUnit's artifacts.
	xsd:anyAttribute	0*	

4.3.2.2 ConfigurationUnitType Property Usage Notes

13911392

1393

1394

1395

1396 1397

1400

1401

14021403

1406

1407

1408

1411

1415

1416

1417

- **Identity**: The *ConfigurationUnit's Identity* element defines human-understandable information that reflects the identity of the provided configuration as understood by the end user of the solution. *Identity* has elements that are common with elements in the corresponding *PackageDescriptor's PackageIdentity* element, for example, *Name* and *Version*. The values of these common elements SHOULD be the same as the corresponding *PackageIdentity* element values.
 - See the *IdentityType* section for structure and additional usage details [3.4].
- **Condition**: A *Condition* is used when the deployment of configuration content is dependent on the existence of certain conditions in the deployment environment.

For example, a package that has one configuration artifact that creates a database table for one database product and a different artifact that creates a table for a different database product would have two configuration units, each with a condition on the associated database product.

- See the *ConditionType* section for structure and additional usage details [4.5.1].
- **Variables**: A *ConfigurationUnit's Variables* element defines variables that are used in the definition of requirements and artifact parameters.
 - When the deployment descriptor defines a single *ConfigurationUnit* at the top level, that is, not inside a *CompositeInstallable*, the variables it defines MAY be referred to by any element under *Topology*. See the *VariablesType* section for structure and additional usage details [4.6.3].
- Requirements: Requirements specified in a ConfigurationUnit identify requirements that MUST be met prior to successful processing of the ConfigurationUnit's artifacts.
 - See the *RequirementsType* section for structure and additional usage details [4.7.1].
- Completion: A Completion element MUST be included if the artifact being processed requires a system operation such as a reboot or logoff to occur to function successfully after deployment or if the artifact executes a system operation to complete deployment of the contents of the artifact.
 - There MUST be an artifact associated with the operation defined by a *Completion* element.
 - For example, if there is a *Completion* element for the *configure* operation, the *ConfigurationUnit* must define a *ConfigArtifact*.

- 1418 See the CompletionType section for the structure and additional usage details [4.3.14].
- ResultingChange: Configuration changes made when the configuration artifact is processed
 SHOULD be declared here. This information may be necessary when the SDD is aggregated into another SDD and the resulting change satisfies a constraint in the aggregation. The information declared here can be compared with resource constraints to determine if application of the ConfigurationUnit will satisfy the constraint.
- See the ResultingChangeType section for structure and additional usage details [4.8.2].
- Artifacts: When the ConfigurationUnit is a singleton defined outside of a CompositeInstallable, it
 MUST define at least one artifact element. The inclusion of an artifact element in a singleton
 ConfigurationUnit implies support for the associated operation.
- When the *ConfigurationUnit* is defined within a *CompositeInstallable*, it MUST define exactly one artifact. The artifact defined MUST be a *ConfigArtifact* and it MUST support the single top level operation defined by the *CompositeInstallable*.
- See the *ConfigurationArtifactsType* section for structure and additional usage details [4.3.5].
- **id**: The *id* attribute may be useful to software that processes the SDD, for example, for use in creating log and trace messages.
- targetResourceRef: The targetResourceRef attribute identifies the resource in Topology that will process the ConfigurationUnit's artifacts to configure the resources identified by the ConfigurationUnit's ResultingChange definition.
- 1437 This value MUST match an *id* of a resource element in *Topology*.

4.3.3 ArtifactType

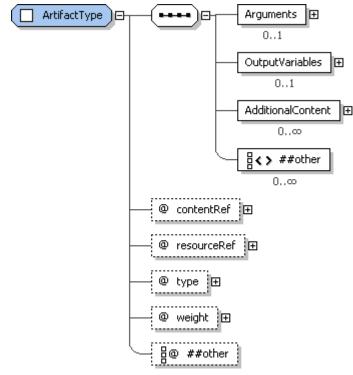


Figure 21: ArtifactType structure.

1439 1440

1441

1442

1443

1444

ArtifactType elements define the files, arguments and other information required to perform a particular deployment operation. Every artifact that can be defined in a content element is an instance of ArtifactType. These are InstallArtifact, UpdateArtifact, UndoArtifact, UninstallArtifact, RepairArtifact and ConfigArtifact.

1445 **4.3.3.1 ArtifactType Property Summary**

Name	Туре	*	Description
Arguments	ArgumentListType	01	Arguments used during processing of the artifact.
OutputVariables	OutputVariableListType	01	Variables whose values are set during processing of the artifact.
AdditionalContent	AdditionalContentType	0*	Additional content files that are part of the artifact.
	xsd:any	0*	
contentRef	xsd:token	01	The primary artifact file. Not used if resourceRef is used.
resourceRef	xsd:IDREF	01	The resulting resource representing the artifact file. Not used if contentRef is used.
type	ArtifactTypeNameType		Type of the primary artifact file.
weight	xsd:positiveInteger	01	The time required to process this artifact relative to all other artifacts in the SDD.
	xsd:anyAttribute	0*	

4.3.3.2 ArtifactType Property Usage Notes

14461447

1448

1449

1450

14511452

1453

1454

1455

14561457

1458 1459

1460

1461

1462

• **Arguments**: Inputs to the processing of the artifact MUST be specified by defining an *Arguments* element. All required inputs MUST be included in the arguments list. There are no implied arguments.

For example, there is no implication that the selected required resource instances will be passed with an *InstallArtifact* on the install operation. If knowledge of those selections is required, instance identifiers should be passed as arguments.

When one *Argument* refers to the *OutputVariable* of another artifact, the output value must be available at the time of processing the dependent artifact.

For example, an artifact in a content element that is conditioned on the operating system being Linux should not refer to the output of an artifact in a content element conditioned on the operating system being Windows^{TM 3}.

A *Dependency* requirement MUST be defined between the content elements to indicate that the artifact that defines the output variable is a pre-requisite of the content element with the dependent artifact.

See the ArgumentListType section for structure and additional usage details [4.3.8].

- OutputVariables: OutputVariables are variables whose values are set by artifact processing.
 OutputVariables can also be useful in log and trace messages.
- See the *OutputVariableListType* section for structure and additional usage details [4.3.10].

sdd-spec-v1.0-os.doc Copyright © OASIS® 2007, 2008. All Rights Reserved.

³ Windows is a registered trademark of Microsoft Corporation in the United States and other countries.

- AdditionalContent: AdditionalContent elements MUST be defined when supporting files are needed by the artifact for this operation. The content file reference is specified via the contentRef attribute of AdditionalContent.
- See the *AdditionalContentType* section for structure and additional usage details [4.3.12].
- **contentRef**: The value MUST be a reference to the *id* of the primary artifact file defined in a *Content* element in the package descriptor.
- Note that it is valid to have no artifact file and drive the operation from arguments alone.
- 1471 When more than one artifact file is needed, *contentRef* points to the primary artifact file and
- 1472 AdditionalContent.contentRef points to any other files used during application of the content element.
- 1473 When resourceRef is defined, contentRef MUST NOT be defined.

1476

1477

1478


1479

resourceRef: Sometimes, artifact files are created during a deployment rather than being contained in the package.

For example, some install programs create an uninstall program when the software is deployed. The uninstall program is the artifact file that is needed by the *UninstallArtifact*, but is created by, but not contained in, the package. In this case, the created artifact file is represented as a *ResultingResource*.

- 1480 An Artifact element that defines resource Ref identifies the resulting resource as its artifact file.
- 1481 When contentRef is defined, resourceRef MUST NOT be defined.
- The value MUST reference the *id* of a resource element in *Topology*.
- **type**: The *type* attribute identifies the format of the artifact file or files. When there is no artifact file identified, *type* MAY be left undefined. If there is an artifact file or additional files defined, *type* MUST be defined.
- Values for this attribute are not defined by this specification. *ArtifactTypeNameType* restricts *type* to valid xsd:QNames.
- weight: Defining weights for all artifacts and referenced packages in an SDD provides useful information to software that manages deployment. The weight of the artifact refers to the relative time taken to deploy the artifact with respect to other artifacts and referenced packages in this SDD.
- For example, if the artifact takes three times as long to deploy as another artifact whose weight is "2", then the weight would be "6". The weight numbers have no meaning in isolation and do not describe actual time elapsed. They simply provide an estimate of relative time.

1494 4.3.4 InstallationArtifactsType

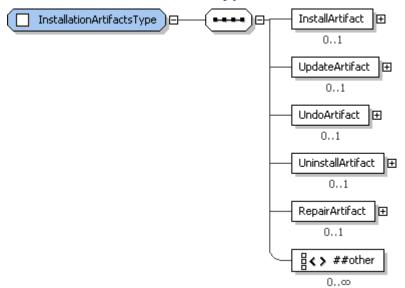

1495 1496

1500

1501

1502

1503

1504 1505

1506

1507

1508

1509

1511

1512 1513

1514

Figure 22: InstallationArtifactsType structure.

1497 InstallationArtifactsType provides the type definition for the Artifacts element of InstallableUnit and
 1498 LocalizationUnit. At least one Artifact element MUST be defined. Within a CompositeInstallable definition,
 1499 exactly one Artifact element MUST be defined.

4.3.4.1 InstallationArtifactsType Property Summary

Name	Туре	*	Description
InstallArtifact	ArtifactType	01	Artifact for install operation.
UpdateArtifact	ArtifactType	01	Artifact for update operation.
UndoArtifact	ArtifactType	01	Artifact for undo operation.
UninstallArtifact	ArtifactType	01	Artifact for uninstall operation.
RepairArtifact	ArtifactType	01	Artifact for repair operation.
	xsd:any	0*	

4.3.4.2 InstallationArtifactsType Property Usage Notes


- InstallArtifact: The InstallArtifact element declares deployment information sufficient to enable the target resource to perform an install using the named artifact files. The ResultingResource and ResultingChange elements describe the characteristics of the new or modified resource(s).
 See the ArtifactType section for structure and additional usage details [4.3.3].
- **UpdateArtifact**: The *UpdateArtifact* element declares deployment information sufficient to enable the target resource to perform an update using the named artifact files. The *RequiredBase* element defines the resource(s) that can be updated. The *ResultingResource* and *ResultingChange* elements describe the updated characteristics of the resource(s).
- 1510 See the *ArtifactType* section for structure and additional usage details [4.3.3].
 - **UndoArtifact**: The *UndoArtifact* element declares deployment information sufficient to enable the target resource to undo an update. This undo will put the resource back to a previous level.
 - The update that can be undone is described in the *RequiredBase* element. The *ResultingResource* definition can be used to describe the state of the resource(s) after the undo completes.

- 1515 See the *ArtifactType* section for structure and additional usage details [4.3.3].
- **UninstallArtifact**: The *UninstallArtifact* element declares deployment information sufficient to enable the target resource to perform an uninstall.
- 1518 If an *InstallArtifact* is defined in the same *InstallableUnit*, the *ResultingResource* element defines the resource(s) that will be uninstalled.
- When an *UninstallArtifact* is the only artifact defined for an *InstallableUnit*, the *RequiredBase* MUST be defined to declare the resource(s) that will be uninstalled. The *ResultingResource* element MUST be left blank because the result of the uninstall is that the resource(s) are removed.
- See the *ArtifactType* section for structure and additional usage details [4.3.3].
- **RepairArtifact**: The *RepairArtifact* element declares deployment information sufficient to enable the target resource to repair an installation.
- 1526 If an *InstallArtifact* is defined in the same *InstallableUnit*, the *ResultingResource* element defines the resource(s) that will be repaired.
- When a *RepairArtifact* is the only artifact defined for an *InstallableUnit*, the *RequiredBase* MUST be defined to declare the resource(s) that will be repaired.
- See the *ArtifactType* section for structure and additional usage details [4.3.3].

1531 4.3.5 ConfigurationArtifactsType

1532

1541



- 1533 Figure 23: ConfigurationArtifactsType structure.
- 1534 ConfigurationArtifactsType provides the type definition for the Artifacts element of ConfigurationUnit.

4.3.5.1 ConfigurationArtifactsType Property Summary

Name	Туре	*	Description
ConfigArtifact	ArtifactType	01	Artifact for configure operation.
	xsd:any	0*	

4.3.5.2 ConfigurationArtifactsType Property Usage Notes

- **ConfigArtifact**: The *ConfigArtifact* element declares deployment information sufficient to allow the target resource to configure the resources identified in the content element's *ResultingChange* elements.
- See the *ArtifactType* section for structure and additional usage details [4.3.3].

4.3.6 OperationListType

- 1542 This simple type extends the xsd:list type as defined in **[XSD]**, and adds the restriction that each
- value in the list must be one of the operations from the enumeration defined by *OperationType* [4.3.7].

1544 **4.3.7 OperationType**

- Operations are used in the SDD to associate requirements and completion actions with particular artifacts.
- For example, when a requirement defines an *operation* attribute with value *undo*, it is a statement that the requirement must be met prior to processing of the undo artifact.

- 1549 *OperationType* enumerates the basic resource lifecycle operations that use the content and information defined in the SDD to change the state of the resources being installed, updated, or configured.
- **4.3.7.1 OperationType Property Usage Notes**
- 1552 Elements and attributes of *OperationType* MUST be set to one of the following values:
- 1553 **configure**: Uses the *ConfigArtifact* to perform configuration actions on a resource.
- 1554 install: Uses the *InstallArtifact* to install resources.
- 1555 repair: Uses the *RepairArtifact* to repair an installation.
- **undo**: Uses the *UndoArtifact* to restore a resource to the state before the most recent update was applied.
- **update**: Uses the *UpdateArtifact* to update an existing instance of a resource, as specified by the required base.
- use: Associates a requirement or completion action with use of the deployed software resources.
 Setting the operation attribute to *use* indicates that the requirement or completion action is not associated with an artifact.
- 1563 uninstall: Uses the *UninstallArtifact* to uninstall a resource.


1564 4.3.8 ArgumentListType

1565

1575 1576

1577

1578



- 1566 Figure 24: ArgumentListType structure.
- Each artifact MAY optionally include an *Arguments* element whose type is provided by *ArgumentListType*.
- 1568 This simply defines a list of *Argument* elements.

1569 **4.3.8.1 ArgumentListType Property Summary**

Name	Туре	*	Description
Argument	ArgumentType	1*	An input to artifact processing.

1570 4.3.8.2 ArgumentListType Property Usage Notes

- **Argument**: An argument value is a variable expression used to define a fixed value for the argument or to define a value in terms of one of the variables visible to the artifact.
- 1573 See the *ArgumentType* section for structure and additional usage details [4.3.9].

1574 4.3.9 ArgumentType




Figure 25: ArgumentType structure.

ArgumentType provides the type definition for Argument elements in artifacts [4.3.3]. This complex type is used to declare the argument name and optionally include a value for that argument.

1579 **4.3.9.1 ArgumentType Property Summary**

Name	Туре	*	Description
name	VariableExpressionType	1	The argument name.
value	VariableExpressionType	01	The argument value.
required	xsd:boolean	01	Indicates that the argument value must result in a valid expression for each particular deployment. **default value="true"
	xsd:anyAttribute	0*	

1580 4.3.9.2 ArgumentType Property Usage Notes

- **name**: Evaluation of the *name* expression produces the name of the argument. This can be useful for arguments with only a name, for example, those that are not name-value pairs.
- When the argument name alone is sufficient to communicate its meaning, the argument value SHOULD be omitted.
- 1585 See the VariableExpressionType section for structure and additional usage details [4.6.1].
- 1586 value: Evaluation of the *value* expression provides the value of the argument.
- The variable expression MAY be used to define a fixed value for the argument or to define a value in terms of one of the variables visible to the artifact.
- See the *VariableExpressionType* section for structure and additional usage details [4.6.1].
- required: In cases where the argument should be ignored when the value expression is not valid for a particular deployment, set required to "false".

1592 **4.3.10 OutputVariableListType**



1594 Figure 26: OutputVariableListType structure.

1593

1595 An artifact can set variables. The variables set by the artifact are defined in the artifact's *OutputVariables*.

4.3.10.1 OutputVariableListType Property Summary

Name	Туре	*	Description
OutputVariable	OutputVariableType	1*	An output from artifact processing.

1597 4.3.10.2 OutputVariableListType Property Usage Notes

• **OutputVariable**: This is the definition of the variable, not a reference to a variable defined elsewhere.

See the *OutputVariableType* section for structure and additional usage details [4.3.11].

1600 4.3.11 OutputVariableType

1601 1602

1603

1604

1605

1606

1608

1609

1610 1611

1613 1614

1615

1616

1617

1618

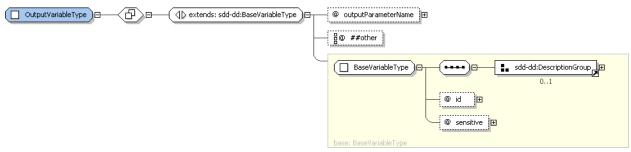


Figure 27: OutputVariableType structure.

Output variables are variables whose value is set by artifact processing. *OutputVariableType* extends *BaseVariableType* and so has all of the attributes defined there, including an *id* attribute that is used to refer to the output variable within the SDD. Output variables can be useful in log and trace messages.

4.3.11.1 OutputVariableType Property Summary

Name	Туре	*	Description
	[extends] BaseVariableType		See the BaseVariableType section for additional properties [4.6.2].
outputParameterName	xsd:NCName	01	An output from artifact processing.
	xsd:anyAttribute	0*	

1607 4.3.11.2 OutputVariableType Property Usage Notes

See the BaseVariableType section for details of the inherited attributes and elements [4.6.2].

• **outputParameterName**: This is the name of the output variable as understood within the artifact processing environment. The output value is associated with the output variable's *id*. The SDD author uses this *id* within the SDD to refer to this output value.

1612 4.3.12 AdditionalContentType

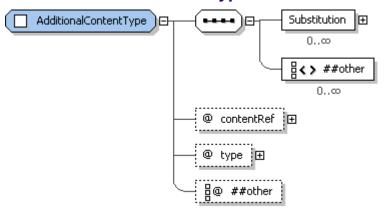


Figure 28: AdditionalContentType structure.

When artifact processing requires more than a single file, the artifact declaration includes information about the additional files needed. *AdditionalContentType* provides the type definition. Additional content MAY include input files that need to be edited to include values received as input to a particular solution deployment. In this case, the additional file can include a *Substitution* element.

4.3.12.1 AdditionalContentType Property Summary

Name	Туре	*	Description
Substitution	SubstitutionType	0*	A value to substitute into the file.
	xsd:any	0*	
contentRef	xsd:token	1	A reference to the content element's id defined in the package descriptor.
type	ArtifactTypeNameType	01	Type of the additional artifact file.
	xsd:anyAttribute	0*	

1620 4.3.12.2 AdditionalContentType Property Usage Notes

- **Substitution**: The *Substitution* element supports the use of files that require some editing before they can be used in artifact processing. The definitions in this element support placement of values determined during a particular deployment into the file identified by the *contentRef* attribute.
- See the SubstitutionType section for structure and additional usage details [4.3.13].
- **contentRef**: The *contentRef* attribute points back to the package descriptor for information about the physical file. This value MUST match an *id* of a content element in the package descriptor.
 - **type**: The *type* attribute identifies the format of the additional file. Values for this attribute are not defined by this specification. *ArtifactTypeNameType* restricts values of *type* to valid xsd:QNames.

1629 4.3.13 SubstitutionType

1621

1622

1623

1624

1627

1628

1630 1631

1632

1633

1634

1635




Figure 29: SubstitutionType structure.

SubstitutionType provides the type definition for the Substitution element in AdditionalContent declarations. It enables declaration of patterns in the file and the values that should replace the patterns before the file is used in artifact processing.

4.3.13.1 SubstitutionType Property Summary


Name	Туре	*	Description
Pattern	xsd:string	1	The search pattern in the file that needs to be substituted.
Value	VariableExpressionType	1	The value to be substituted in the file.
limit	xsd:positiveInteger	01	The number of substitutions that should be made.
required	xsd:boolean	01	Indicates that substitution's value must result in a valid expression for each particular deployment.
			**default value="true"

xsd:anyAttribute	0*	

4.3.13.2 SubstitutionType Property Usage Notes

- Pattern: This is the string that will be replaced with the value when found in the file.
- Value: Evaluation of the variable expression results in the value that will be substituted for the pattern.
- See the *VariableExpressionType* section for structure and additional usage details [4.6.1].
- **limit**: If *limit* is not defined, there is no limit and all instances of the pattern found in the file will be replaced.
 - **required**: In cases where the substitution should be ignored when the value expression is not valid for a particular deployment, set required to "false".

1645 **4.3.14 CompletionType**

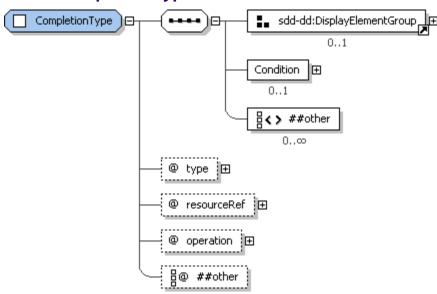

1646 1647

1648 1649

1650

1651

1652

1637

1638

1639

1643

1644

Figure 30: CompletionType structure.

For some deployments certain completion actions such as restart and logoff are required before a deployment operation using a particular content element can be considered complete. The *CompletionType* elements enable the SDD author to indicate either that one of these actions is required or that one of these actions will be performed by the associated artifact.

4.3.14.1 CompletionType Property Summary

Name	Туре	*	Description
DisplayName	DisplayTextType	01	Name of the completion action.
Description	DisplayTextType	01	Description of the completion action.
ShortDescription	DisplayTextType	01	Short description of the completion action.
Condition	ConditionType	01	Conditions that determine when the completion action will be used.
	xsd:any	0*	
type	CompletionTypeNamesType	1	The type of the completion action.

resourceRef	xsd:IDREF	1	The resource where the completion action will be executed.
operation	OperationListType	1	Associates a completion action with the processing of a particular artifact.
	xsd:anyAttribute	0*	

4.3.14.2 CompletionType Property Usage Notes

1653

1660

1661

1662

1663

1664 1665

16661667

1668

1669

1670

1671

16721673

1674

1675 1676

1677

1678 1679

1680

1682

1683

1684

1686

1690 1691

1692

1693

- **DisplayName**: This element MAY be used to provide human-understandable information. If used, it MUST provide a label for the *Completion* element.
- See the *DisplayElementGroup* section for structure and additional usage details [4.14.2].
- **Description, ShortDescription**: These elements MAY be used to provide human-understandable information. If used, they MUST provide a description of the *Completion* element.
- The Description element MUST be defined if the ShortDescription element is defined.
 - See the DisplayElementGroup section for structure and additional usage details [4.14.2].
 - **Condition**: Conditions specified on resource characteristics determine if the completion action applies. If the conditions are met, the action applies. If not met, then the action is not needed. Unmet conditions are not considered a failure. When no conditions are defined, the action always applies.
 - See the ConditionType section for structure and additional usage details [4.5.1].
 - **type**: This is the completion action that applies when conditions defined in *ResourceConstraint* are met. Allowed values defined in *CompletionTypeNameType* are:
 - restartRequiredImmediately: A system restart is required before the deployment operation
 is considered complete and the artifact associated with the operation does not perform the
 restart. The restart MUST happen before further deployment actions are taken.
 - **restartRequiredBeforeUse**: A system restart is required before the deployment operation is considered complete and the artifact associated with the operation does not perform this action. The restart MUST happen before the associated resources are used.
 - restartOccurs: The artifact associated with the lifecycle operation will initiate a system
 - **logoffRequired**: A logoff and logon to the user account is required before the deployment operation is considered complete and the artifact associated with the operation does not perform this action. The logoff and logon MUST happen before the operation can be considered complete.
 - resourceRef: This will often be the resource named as the target resource for the defining content element.
- The value MUST reference the *id* of a resource element in *Topology*.
 - **operation**: A completion action is associated with the processing of one artifact by setting *operation* to the operation associated with that artifact. The element that defines the *Completion* MUST also define an artifact associated with the operation defined for the *Completion* element.
- See the OperationListType section for operation enumerations and their meaning [4.3.6].

4.4 Constraints

- 1687 The SDD author needs to communicate constraints on resources for a variety of purposes.
- Some constraints must be met for the requirements of a content element to be met. See the Requirements Type section [4.7.1].
 - Other constraints must be met for a resource to serve as the required base for an update. See the RequiredBaseType section [4.7.8].
 - Still others must be met for to satisfy a condition that determines the applicability of a content element or completion action. See the *ConditionType* section [4.5.1] and the *CompletionType* section [4.3.14].

1694 The Constraint types described in this section support identification of resource constraints in these 1695 various contexts. These types are:

- **CapacityConstraint**
- 1697 ConsumptionConstraint
- 1698 **PropertyConstraint**

1696

1702

1703

1704 1705

1706

1707

1708

1710

1711

1715

1716 1717

1718

1719

1720

1721

- 1699 **VersionConstraint**
- 1700 **UniquenessConstraint**
- 1701 RelationshipConstraint

All of these constraint types are constraints on a property of a resource. There are different constraint types because there are distinct semantics for different types of resource properties. Examples of these varying semantics include constraints that the property value be:

- within a certain range;
- one of a set of values;
 - all of a set of values:
 - equal to a certain value;
- 1709 no more than or no less than a certain value;
 - no more than or no less than a certain value when all constraints of that type are added together.

1712 In all cases, deployment software must be able to discover the property's value to honor the SDD author's 1713 intent.

4.4.1 CapacityConstraintType 1714




Figure 31: CapacityConstraintType structure.

CapacityConstraintType provides the type definition of the Capacity elements of

RequirementResourceConstraintType [4.7.5]. These elements are used to express a requirement on the capacity of a particular resource property such as memory available from an operating system. Capacity is shared; multiple capacity constraints expressed on the same property are evaluated individually without assuming any change to the available quantity of the property.

1722

4.4.1.1 CapacityConstraintType Property Summary

Name	Туре	*	Description
Description	DisplayTextType	01	A description of the capacity constraint. Required if ShortDescription is defined.
ShortDescription	DisplayTextType	01	A short description of the capacity constraint.
PropertyName	xsd:QName	1	Name of the constrained property.
Value	CapacityValueType	1	Bounds on the value of the constrained property.

4.4.1.2 CapacityConstraintType Property Usage Notes

- Description, ShortDescription: These elements MAY be used to provide human-understandable information. If used, they MUST provide a description of the capacity constraint on the resource.
- The Description element MUST be defined if the ShortDescription element is defined.
- 1727 See the *DescriptionGroup* section for structure and additional usage details [4.14.1].
- **PropertyName**: This name corresponds to the name of the constrained resource property in the environment. This name may be specified in profiles [5.3].
- **Value**: *Value*: *Value* specifies the bound and optional recommended bound on the resource property identified in the *PropertyName* element.
- 1732 See the Capacity Value Type section for structure and additional usage details [4.4.2].

4.4.2 CapacityValueType

17231724

1725

1733

1734

1736

1737


1738

1739

1741

1742

1743

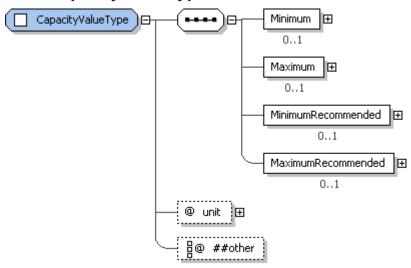

1735 Figure 32: CapacityValueType structure.

Capacity value is expressed in terms of a minimum or maximum capacity. *CapacityValueType* provides the elements that support this expression. It also supports expression of a recommended minimum or maximum capacity.

4.4.2.1 CapacityValueType Property Summary

Name	Туре	*	Description
Minimum	VariableExpressionType	01	Minimum capacity.
Maximum	VariableExpressionType	01	Maximum capacity.
MinimumRecommended	VariableExpressionType	01	Minimum recommended capacity.
MaximumRecommended	VariableExpressionType	01	Maximum recommended capacity.
unit	xsd:string	01	Unit of measure used to interpret the capacity value.
	xsd:anyAttribute	0*	

1740 4.4.2.2 CapacityValueType Property Usage Notes

• **Minimum**: There will usually be either a minimum value or a maximum value defined, but not both. When minimum is specified, the actual value of the capacity property MUST be equal to or greater than the minimum value.

- 1744 See the VariableExpressionType section for structure and additional usage details [4.6.1].
- **Maximum**: When specified, the actual value of the capacity property MUST be less than or equal to the defined maximum.
- 1747 If *Minimum* and *Maximum* are both defined, *Minimum* MUST be less than or equal to *Maximum*.
- 1748 See the VariableExpressionType section for structure and additional usage details [4.6.1].
- **MinimumRecommended**: The SDD author can indicate a preferred, but not required, minimum by defining a value for this element.
- 1751 See the *VariableExpressionType* section for structure and additional usage details [4.6.1].
- **MaximumRecommended**: The SDD author can indicate a preferred, but not required, maximum by defining a value for this element.
- 1754 If *MinimumRecommended* and *MaximumRecommended* are both defined, *MinimumRecommended* MUST be less than or equal to *MaximumRecommended*.
- See the *VariableExpressionType* section for structure and additional usage details [4.6.1].
 - unit: Values for unit SHOULD be well-known units of measure from the International System of Units [UNIT]. A unit of measure SHOULD be specified for all properties that are measured in any kind of unit.

4.4.3 ConsumptionConstraintType

1757

1758

1759

1760

1761 1762

1763

1764 1765

1766

1767

1768 1769

1770 1771

1772

1773 1774

1775

1776




Figure 33: ConsumptionConstraintType structure.

ConsumptionConstraintType provides the type definition of the Consumption elements of RequirementResourceConstraintType [4.7.5]. These elements are used to express a requirement on the available quantity of a particular resource property such as disk space on a file system.

ConsumptionConstraints represent exclusive use of the defined quantity of the resource property. In other words, consumption constraints are additive, with each consumption constraint specified in the SDD adding to the total requirement for the specified resource(s). A consumption constraint is assumed to alter the available quantity such that the portion of the property used to satisfy one constraint is not available to satisfy another consumption constraint on the same property.

For example, suppose that the target file system has 80 megabytes available. The application of a content element's *InstallArtifact* results in installation of files that use 5 megabytes of file space. The application of a second *InstallArtifact* results in installation of files that use 2 megabytes of file space. Consumption constraints are additive, so the total space used for this content element is 7 megabytes, leaving 73 (80–7) megabytes available on the target file system.

4.4.3.1 ConsumptionConstraintType Property Summary

Name	Туре	*	Description
Description	DisplayTextType	01	A description of the consumption constraint. Required if ShortDescription is defined.
ShortDescription	DisplayTextType	01	A short description of the consumption constraint.
PropertyName	xsd:QName	1	Names the resource property to test.
Value	ConsumptionConstraintValueType	1	A variable expression defining the minimum available

	quantity.	
--	-----------	--

4.4.3.2 ConsumptionConstraintType Property Usage Notes

- Description, ShortDescription: These elements MAY be used to provide human-understandable information. If used, they MUST provide a description of the consumption constraint on the resource.
- 1780 The Description element MUST be defined if the ShortDescription element is defined.
- See the *DescriptionGroup* section for structure and additional usage details [4.14.1].
- PropertyName: The property name can be used to find the property value in the deployment environment. This name may be specified in profiles [5.3].
- Value: The result of evaluating this variable expression represents the minimum quantity of the
 named resource property that MUST be available for successful deployment of the defining content
 element's artifacts. This quantity will be consumed by application of the associated artifact.
- 1787 See the ConsumptionConstraintValueType section for structure and additional usage details [4.4.4].

1788 4.4.4 ConsumptionConstraintValueType

1789

1793

1796

1797 1798



1790 Figure 34: ConsumptionConstraintValueType structure.

1791 A consumption value is defined using a variable expression. *ConsumptionConstraintValueType* provides the variable expression by extending *VariableExpressionType*.

4.4.4.1 ConsumptionConstraintValueType Property Summary

Name	Туре	*	Description
	[extends] VariableExpressionType		See the VariableExpressionType section for additional properties [4.6.1].
unit	xsd:string	01	Unit of measure used to interpret the consumption value.
	xsd:anyAttribute	0*	


4.4.4.2 ConsumptionConstraintValueType Property Usage Notes

See the VariableExpressionType section for details of the inherited attributes and elements [4.6.1].

 unit: Values for unit SHOULD be well-known units of measure from International System of Units [UNIT]. A unit of measure SHOULD be specified for all properties which are measured in any kind of unit.

sdd-spec-v1.0-os.doc Copyright © OASIS® 2007, 2008. All Rights Reserved.

4.4.5 PropertyConstraintType 1799

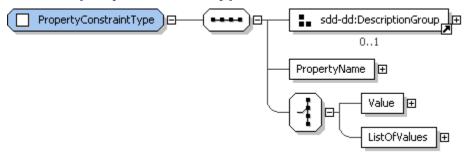

1801 Figure 35: PropertyConstraintType structure.

1802 PropertyConstraintType provides the type definition of the Property elements of 1803

RequirementResourceConstraintType [4.7.5]. It supports definition of a required value or set of

acceptable values for a particular resource property.


1805 4.4.5.1 PropertyConstraintType Property Summary

Name	Туре	*	Description
Description	DisplayTextType	01	A description of the property constraint. Required if ShortDescription is defined.
ShortDescription	DisplayTextType	01	A short description of the property constraint.
PropertyName	xsd:QName	1	Name of the constrained property.
Value	VariableExpressionType	01	Required property value.
ListOfValues	PropertyValueListType	01	List of required property values.

4.4.5.2 Property Constraint Type Property Usage Notes

- Description, ShortDescription: These elements MAY be used to provide human-understandable information. If used, they MUST provide a description of the property constraint on the resource.
- The Description element MUST be defined if the ShortDescription element is defined.
- See the DescriptionGroup section for structure and additional usage details [4.14.1]. 1810
- PropertyName: The property name can be used to find the property value in the deployment 1811 1812 environment. This name may be specified in profiles [5.3].
- 1813 Value: The result of evaluating this variable expression represents the required value of the named 1814 resource property.
 - See the VariableExpressionType section for structure and additional usage details [4.6.1].
- 1816 ListOfValues: A list of required values can be defined in place of a single required value.
- 1817 See the Property ValueListType section for structure and additional usage details [4.4.6].

4.4.6 PropertyValueListType 1818



1819

1800

1804

1806 1807

1808

1809

1815

- 1820 Figure 36: PropertyValueListType structure.
- A property value list is expressed as one or more strings representing valid values for the property.

4.4.6.1 PropertyValueListType Property Summary

Name	Туре	*	Description
Value	VariableExpressionType	1*	A property value.
match	PropertyMatchType	01	Determines whether the actual property value must match any or all of the listed values. **default value="any"
	xsd:anyAttribute	0*	

1823 4.4.6.2 Property Value List Type Property Usage Notes

- Value: The result of this variable expression represents one possible required value of the named resource property.
 - See the VariableExpressionType section for structure and additional usage details [4.6.1].
- match: The value or values of the property found in the deployment environment are compared to the value or values listed in the property constraint. PropertyMatchType defines two enumerated values: any and all. When match is set to any, the property constraint is considered met when any one of the found property values matches any one of the declared property values. When match is set to all, the constraint is considered met when all of the declared property values match values found for the property.

1833 **4.4.7 VersionConstraintType**

1824

1825

1826

1827

1828

1829

1830

1831 1832

1834 1835

1836 1837

1838

1839




Figure 37: VersionConstraintType structure.

VersionConstraintType provides the type definition of the VersionConstraint elements of RequirementResourceConstraintType [4.7.5]. A VersionConstraint can define a set of individual versions or ranges of versions that are supported and a similar set that are certified.

4.4.7.1 VersionConstraintType Property Summary

Name	Туре	*	Description
Description	DisplayTextType	01	A description of the version constraint. Required if ShortDescription is defined.
ShortDescription	DisplayTextType	01	A short description of the version constraint.
Supported	VersionConstraintValueType	1	A supported version or set of versions.
Certified	VersionConstraintValueType	01	A subset of the supported versions that are certified as tested.

4.4.7.2 VersionConstraintType Property Usage Notes

- **Description**, **ShortDescription**: These elements MAY be used to provide human-understandable information. If used, they MUST provide a description of the version constraint on the resource.
- The Description element MUST be defined if the ShortDescription element is defined.
- 1844 See the *DescriptionGroup* section for structure and additional usage details [4.14.1].
- **Supported**: If the resource version is in the *Supported* set, it meets the requirements.
- See the VersionConstraintValueType section for structure and additional usage details [4.4.8].
- **Certified**: In some cases the set of required versions may be different from the set of versions that are certified by the manufacturer as thoroughly tested.
- 1849 See the VersionConstraintValueType section for structure and additional usage details [4.4.8].

4.4.8 VersionConstraintValueType

1840

1850

1851

1853


1854

1855

1856

1863

1866



1852 Figure 38: VersionConstraintValueType structure.

A version constraint can be specified using any number of individual version values in combination with any number of version ranges.


4.4.8.1 VersionConstraintValueType Property Summary

Name	Туре	*	Description	
Value	VersionValueType	0*	A version value with associated fixes specified.	
Range	VersionRangeType	0*	A range of version values with associated fixes specified for each range.	

4.4.8.2 VersionConstraintValueType Property Usage Notes

- Value: Discrete version values can be defined when the set of required versions includes versions that do not fall within a range. There is no assumption by this specification that version values are numerically comparable. The method of comparing version values may be resource-specific.
- 1860 See the VersionValueType section for structure and additional usage details [4.4.9].
- **Range**: See the *VersionRangeType* section for structure and additional usage details [4.4.10].

1862 **4.4.9 VersionValueType**



1864 Figure 39: VersionValueType structure.

1865 A version value includes a version and a list of required fixes associated with that version.

4.4.9.1 VersionValueType Property Summary


|--|

Version	VersionType	1	An allowable version value.	
FixName	xsd:string	0*	The name of a fix.	

1867 4.4.9.2 VersionValueType Property Usage Notes

- **Version**: A string containing a single, exact version value. This is compared with the version value of specific resource instances. Only equal values satisfy this part of the constraint.
- 1870 See the *VersionType* section for structure and additional usage details [3.10].
- **FixName**: Any number of *FixName* elements can be defined, identifying fixes that must be discovered to be applied for the version constraint to be considered met.

1873 **4.4.10 VersionRangeType**



1874 1875

Figure 40: VersionRangeType structure.

1876 A *VersionRange* is specified with a minimum and maximum version value and a list of required fixes associated with that range. The method of comparing version strings in a version range is resource-specific.

1879 **4.4.10.1 VersionRangeType Property Summary**

Name	Туре	*	Description	
MinVersion	VersionType	01	The least allowable version value.	
MaxVersion	MaxVersionType	01	The greatest allowable version value.	
FixName	xsd:string	0*	The name of a fix.	

1880 4.4.10.2 VersionRangeType Property Usage Notes

- **MinVersion**: This is the lower bound of a version range. If *MinVersion* is defined but *MaxVersion* is not, there is no upper bound. A version that is equal to *MinVersion* is within the defined range.
- See the *VersionType* section for structure and additional usage details [3.10].
- MaxVersion: This is the upper bound of a version range. If MaxVersion is defined but MinVersion is not, there is no lower bound. A version that is equal to MaxVersion may be within the defined range depending on the value specified for the inclusive attribute.
- See the *MaxVersionType* section for structure and additional usage details [4.4.11].
- **FixName**: Any number of *FixNames* can be defined identifying fixes that must be found to be applied for the version constraint is to be considered satisfied. This is true for all versions within the defined range.
- 1891 When FixName is defined, either a MinVersion or a MaxVersion element MUST also be defined.

1892 4.4.11 MaxVersionType

1893

1895

1898

1899

1900 1901

1902

1904

1905 1906


1907

1908

1909

1910

1917



1894 Figure 41: MaxVersionType structure.

A maximum version can be inclusive or exclusive.

1896 **4.4.11.1 MaxVersionType Property Summary**

Name	Туре	*	Description
	[extends] VersionType		See the VersionType section for additional properties [3.10].
inclusive	xsd:boolean	01	Indicates whether the max version value is included in the supported range of versions. **default value="false"
	xsd:any	0*	

1897 4.4.11.2 MaxVersionType Property Usage Notes

See the VersionType section for details of the inherited attributes and elements [3.10].

• **inclusive**: The *inclusive* attribute allows the SDD author to choose the semantics of maximum version. Supported ranges are often everything equal to or greater than the minimum version and up to, but not including, the maximum version. Sometimes it is more convenient for the range to include the maximum version.

1903 **4.4.12 UniquenessConstraintType**




Figure 42: UniquenessConstraintType structure.

A *UniquenessConstraint* is used to indicate when two resources defined in topology MUST or MUST NOT resolve to the same resource instance during a particular deployment. A *UniquenessConstraint* indicates that the two resources MUST NOT be the same when it is defined in a *ResourceConstraint* element with testValue="true". A *UniquenessConstraint* indicates that the two resources MUST be the same when defined in a *ResourceConstraint* with testValue="false".

When no *UniquenessConstraint* is in scope for a particular pair of resources, the two resources MAY resolve to the same resource when their identifying characteristics are the same and when all in-scope

1913 constraints on both resources are satisfied.

1914 The first of the pair of resources is identified in the resourceRef attribute of the ResourceConstraint

1915 element that defines the *UniquenessConstraint*. The second of the pair is identified in the

1916 distinctResourceRef attribute of the UniquenessConstraint.

4.4.12.1 UniquenessConstraintType Property Summary

Name Type	*	Description
-----------	---	-------------

Description	DisplayTextType	01	A description of the uniqueness constraint, for example what must or must not be unique and why.
ShortDescription	DisplayTextType	01	A short description of the uniqueness constraint.
distinctResourceRef	xsd:IDREF	1	One of the pair of resources referred to by the constraint.

1918 4.4.12.2 UniquenessConstraintType Property Usage Notes

- Description, ShortDescription: These elements MAY be used to provide human-understandable information. If used, they MUST provide a description of the uniqueness constraint on the resource.
- The Description element MUST be defined if the ShortDescription element is defined.
- 1922 See the *DescriptionGroup* section for structure and additional usage details [4.14.1].
- 1923 distinctResourceRef: The second resource in the pair of resources.
- The value MUST reference the *id* of a resource element in *Topology*.

1925 4.4.13 RelationshipConstraintType

1919

1920

1926 1927

1928

1929

1930 1931

1932

1933

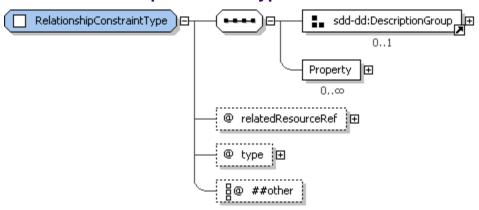


Figure 43: RelationshipConstraintType structure.

A *RelationshipConstraint* identifies a particular relationship between two resources that is constrained in some way by the SDD. The value of the *testValue* attribute of the *ResourceConstraint* that contains the *RelationshipConstraint* determines whether the constraint MUST be satisfied or MUST NOT be satisfied.

The first resource of the pair is defined by the resourceRef attribute of the ResourceConstraint containing the RelationshipConstraint.

4.4.13.1 RelationshipConstraintType Property Summary

Name	Туре	*	Description
Description	DisplayTextType	01	A description of the relationship and its purpose in the overall solution.
ShortDescription	DisplayTextType	01	A short description of the relationship.
Property	PropertyType	0* A property constraint that further constrains the relationship.	
relatedResourceRef	xsd:IDREF	01	The second resource in the relationship.
type	xsd:QName	1	The type of the relationship.
	xsd:anyAttribute	0*	

4.4.13.2 RelationshipConstraintType Property Usage Notes

- Description, ShortDescription: These elements MAY be used to provide human-understandable information. If used, they MUST provide a description of the relationship constraint on the resource.
- The Description element MUST be defined if the ShortDescription element is defined.
- 1938 See the DescriptionGroup section for structure and additional usage details [4.14.1].
- 1939 **Property**: This element MAY be used to provide additional constraints on the relationship.
- For example, a connectivity relationship might specify additional information such as the specific protocol used (for instance, TCP/IP) and/or particular characteristics of a protocol (for instance, port number).
- 1943 See the *PropertyType* section for structure and additional usage details [4.2.3].
- relatedResourceRef: Naming the second resource is optional. When it is not named, the relationship constraint is satisfied if the first resource has the defined relationship with any other resource.
- 1946 When it is named, the value MUST reference the *id* of a resource element in *Topology*.
- 1947 type: Values for relationship type are not defined by the SDD specification.

4.5 Conditions

1934

1948

1953 1954

1955

1956

1957

1958

1959

1960

1961 1962

1949 Conditions are expressed on characteristics of resources in the deployment environment. Conditions are used to indicate when particular elements of the SDD are applicable, or when they should be ignored.

1951 Conditions are not requirements. Failure to satisfy a condition does not indicate a failure; it simply means the conditioned element should be ignored. Conditions are used to:

- determine if a content element is applicable
- choose from among values for a variable
- determine when a feature is applicable
- determine when a particular result is applicable
- determine if a particular completion action is necessary.

Because conditions are always based on the characteristics of resources, they are expressed using resource constraints.

4.5.1 ConditionType

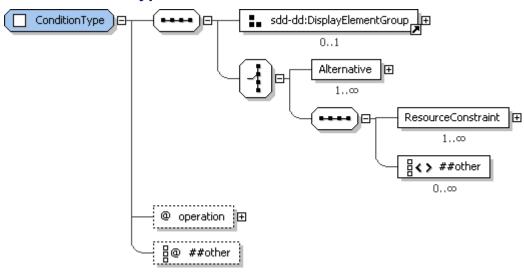


Figure 44: ConditionType structure.

1963 *ConditionType* allows expression of the particular resource characteristics that must be true for the condition to be considered met. These are resource characteristics that may vary from one particular deployment to another.

For example, one deployment using the SDD might use one version of an application server and a different deployment might use a different version. The differences in the version might be great enough to:

select among content elements.

1966

1967

1968 1969

1970

1971

19721973

1974

19751976

1977

1978

1979

1980

1981

1982

1983

For example, one content element has an artifact for a Web application that works in a particular version and a different content element has an artifact for a later version of the same Web application.

• select among variable values.

For example, the default installation path on one operating system may be different from the default install path on another operating system.

select among completion actions.

For example, a reboot may be required when deploying on one operating system but not another.

4.5.1.1 ConditionType Property Summary

Name	Туре	*	Description
DisplayName	DisplayTextType	01	Name of the condition.
Description	DisplayTextType	01	Description of the condition.
ShortDescription	DisplayTextType	01	Short description of the condition.
Alternative	AlternativeConditionalType	0*	An alternative set of resource constraints.
ResourceConstraint	ConditionalResourceConstraintType	0*	A set of constraints on one resource.
	xsd:any	0*	
operation	OperationListType	01	The condition applies only when processing the artifact associated with this operation.
	xsd:anyAttribute	0*	

4.5.1.2 ConditionType Property Usage Notes

- DisplayName: This element MAY be used to provide human-understandable information. If used, it MUST provide a label for the condition.
- See the DisplayElementGroup section for structure and additional usage details [4.14.2].
- **Description, ShortDescription**: These elements MAY be used to provide human-understandable information. If used, they MUST provide a description of the condition.
- The Description element MUST be defined if the ShortDescription element is defined.
- See the *DisplayElementGroup* section for structure and additional usage details [4.14.2].
- 1988 Alternative: When a condition can be satisfied in multiple ways, two or more *Alternative* elements are defined.
- As a convenience for tooling that produces SDDs, it is also possible to define a single *Alternative*.
- This is semantically identical to directly defining *ResourceConstraints*.
- To meet a condition, at least one of the specified *Alternatives* must be satisfied.
- See the *AlternativeConditionalType* section for structure and additional usage details [4.5.2].

- **ResourceConstraint**: When a condition can be satisfied in only one way, constraints MAY be defined directly under *Condition* or in a single *Alternative* element.
- 1996 Constraints are defined using a sequence of *ResourceConstraints*. Every constraint in the sequence 1997 must be met for the condition to be met.
- See the ConditionalResourceConstraintType section for structure and additional usage details [4.5.3].
- **operation**: In a singleton atomic content element, a condition MAY be associated with application of one or more artifacts. The association is made by setting the *operation* attribute to the operations associated with those artifacts.

Conditions defined for CompositeInstallable and for atomic content elements defined within a CompositeInstallable SHOULD NOT define operation. If the operation is defined for a CompositeInstallable Condition, it MUST be set to the operation defined in the CompositeInstallable's operation attribute. If operation is defined for an atomic content element's Condition, it MUST be set to the operation associated with the single artifact defined by the atomic content element.

When operation is not specified, the condition applies to the processing of all artifacts.

See the OperationListType section for operation enumerations and their meaning [4.3.6].

2009 4.5.2 AlternativeConditionalType

2002

2003 2004

2005

20062007

2008

2010 2011

2012

2013

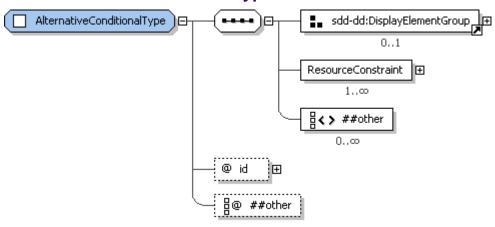


Figure 45: AlternativeConditionalType structure.

When a condition can be met in more than one way, alternative sets of conditional resource constraints can be defined. *AlternativeConditionalType* provides the type definition for these elements.

2014 4.5.2.1 AlternativeConditionalType Property Summary

Name	Туре	*	Description
DisplayName	DisplayTextType	01	Name of the alternative.
Description	DisplayTextType	01	Description for the alternative.
ShortDescription	DisplayTextType	01	Short description of the alternative.
ResourceConstraint	ConditionalResourceConstraintType	1*	A set of constraints on one resource.
	xsd:any	0*	
id	xsd:IDREF	1	Identifier for the alternative that is unique within the deployment descriptor.
	xsd:anyAttribute	0*	

4.5.2.2 AlternativeConditionalType Property Usage Notes

2015

2025

2026

2027

2028

2029 2030

2031

2032 2033

2034

- DisplayName: This element MAY be used to provide human-understandable information. If used, it
 MUST provide a label for the alternative condition.
- 2018 See the *DisplayElementGroup* section for structure and additional usage details [4.14.2].
- **Description**, **ShortDescription**: These elements MAY be used to provide human-understandable information. If used, they MUST provide a description of the alternative condition.
- The Description element MUST be defined if the ShortDescription element is defined.
- 2022 See the *DisplayElementGroup* section for structure and additional usage details [4.14.2].
- 2023 **ResourceConstraint**: All constraints defined in the individual *Alternative* MUST be met for the *Alternative* condition to evaluate to true.
 - See the ConditionalResourceConstraintType section for structure and additional usage details [4.5.3].
 - id: The id attribute may be useful to software that processes the SDD, for example, for use in creating log and trace messages.

4.5.3 ConditionalResourceConstraintType

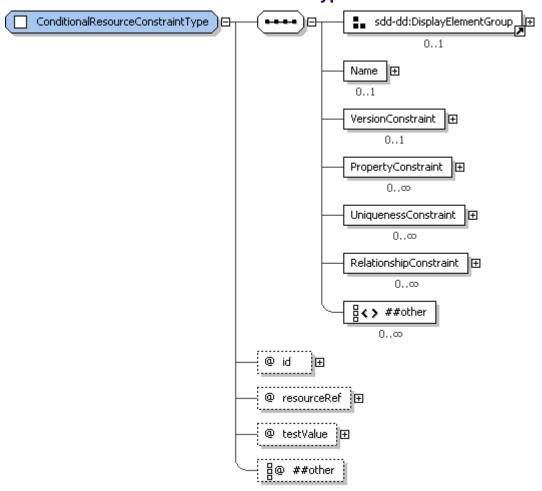


Figure 46: ConditionalResourceConstraintType structure.

ConditionalResourceConstraintType provides the type definitions for the ResourceConstraint elements used in conditions. These constraints do not represent requirements for deployment. They identify the resource characteristics associated with a condition. Name, version, property and the existence or absence of the resource can be specified with a resource constraint used in a condition.

2035 4.5.3.1 ConditionalResourceConstraintType Property Summary

Name	Туре	*	Description	
DisplayName	DisplayTextType		Name of the resource constraint.	
Description	DisplayTextType	01	Description for the resource constraint.	
ShortDescription	DisplayTextType	01	Short description of the resource constraint.	
Name	VariableExpressionType	01	Name of the resource constraint.	
VersionConstraint	VersionConstraintValueType	01	A resource version set.	
PropertyConstraint	ConditionalPropertyConstraintType	0*	A resource property name and required value.	
UniquenessConstraint	UniquenessConstraintType	0*	A required mapping of two resources in the topology to unique instances in the deployment environment.	
RelationshipConstraint	elationshipConstraint RelationshipConstraintType		A required relationship between the resource identified in the resourceRef and another resource in the topology.	
	xsd:any	0*		
id	xsd:ID	1	Identifier for the resource constraint that is unique within the deployment descriptor.	
resourceRef	xsd:IDREF	1	The resource to which the conditions apply.	
testValue xsd:boolean		01	The result of evaluating the contained constraints, which will result in the ResourceConstraint being met. **default value="true"	
	xsd:anyAttribute	0*		

4.5.3.2 ConditionalResourceConstraintType Property Usage Notes

- DisplayName: This element MAY be used to provide human-understandable information. If used, it
 MUST provide a label for the resource constraint.
 - See the DisplayElementGroup section for structure and additional usage details [4.14.2].
- Description, ShortDescription: These elements MAY be used to provide human-understandable information. If used, they MUST provide a description of the resource constraint.
 - The Description element MUST be defined if the ShortDescription element is defined.
 - See the DisplayElementGroup section for structure and additional usage details [4.14.2].
- Name: The name of the resource identified by resourceRef. If the resource name is defined in topology it SHOULD NOT be defined here. If it is defined in both places, the one defined in the condition is used when evaluating the condition.
 - See the VariableExpressionType section for structure and additional usage details [4.6.1].
- **VersionConstraint**: The actual version of the resource MUST be one of the set of versions defined here for the version condition to be considered met.
- See the *VersionConstraintValueType* section for structure and additional usage details [4.4.8].
- PropertyConstraint: The actual value of the property MUST match the value defined here for the condition to be considered met.
- 2053 See the Conditional Property Constraint Type section for structure and additional usage details [4.5.4].

20362037

2038

2039

2040

2041

2042

2043

2044

2045 2046

2047

- UniquenessConstraint: UniquenessConstraint elements are used in ResourceConstraints to
 indicate when two resources defined in topology MUST or MUST NOT resolve to the same resource instance during a particular deployment.
- 2057 See the *UniquenessConstraintType* section for structure and additional usage details [4.4.12].
- **RelationshipConstraint**: RelationshipConstraint elements are used in ResourceConstraints to indicate a constraint on a particular relationship between resources.
 - See the RelationshipConstraintType section for structure and additional usage details [4.4.13].
- **id**: The *id* attribute may be useful to software that processes the SDD, for example, for use in creating log and trace messages.
 - resourceRef: The version and property constraints defined here all apply to the one resource specification in topology identified by this attribute.
 - The value MUST reference the *id* of that resource element in *Topology*.
 - **testValue**: When the result of evaluating *Name* and all of the constraints defined in the *ResourceConstraint* matches the value of *testValue*, the *ResourceConstraint* is considered met.
 - When no name, version or property constraints are defined, and *testValue* is "true", the constraint is met if the resource exists as defined in topology.
- When no name, version or property constraints are defined, and *testValue* is "false", the constraint is met if the resource, as defined in topology, does not exist.

4.5.4 Conditional Property Constraint Type

2060

2063

2064 2065

2066

2067

2068

2069

2072

2073 2074

2075

2076

2077 2078

2079

2080




Figure 47: ConditionalPropertyConstraintType structure.

ConditionalPropertyConstraintType provides the type definition for a PropertyConstraint included within Alternatives specified in Condition elements. The ConditionalPropertyConstraintType is very similar to the PropertyConstraintType; the only difference is that the Value element defined in the ConditionalPropertyConstraintType is of type xsd:string which is less restrictive than the Value element defined in the PropertyConstraintType which is of VariableExpressionType.

4.5.4.1 ConditionalPropertyConstraintType Property Summary

Name	Туре	*	Description
Description	DisplayTextType	01	A description of the property constraint. Required if ShortDescription is defined.
ShortDescription	DisplayTextType	01	A short description of the property constraint.
PropertyName	xsd:QName	1	Name of the constrained property.
Value	xsd:string	01	Required property value.
ListOfValues	PropertyValueListType	01	List of required property values.

2081 4.5.4.2 ConditionalPropertyConstraintType Property Usage Notes

- Description, ShortDescription: These elements MAY be used to provide human-understandable information. If used, they MUST provide a description of the *PropertyConstraint* element.
- The Description element MUST be defined if the ShortDescription element is defined.
- 2085 See the *DescriptionGroup* section for structure and additional usage details [4.14.1].
- PropertyName: The property name can be used to find the property value in the deployment environment. The name may be defined in a profile [5.3].
- **Value**: In a condition, the value used in a property constraint is a string rather than a variable expression.
- ListOfValues: A list of required values can be defined in place of a single required value.

 See the *PropertyValueListType* section for structure and additional usage details [4.4.6].

4.6 Variables

2092

2095

2096 2097

2098

2099

2100

21012102

2103

2104

2105

2106

2107

2108

Variables provide a means to associate user inputs, resource property values, fixed strings and values derived from these with input arguments for artifacts and with constraints on resources.

4.6.1 VariableExpressionType




Figure 48: VariableExpressionType structure.

Variable expressions are used in many places in the SDD. They allow the value of a variable to be used as all, or part of, the value of some other SDD element. A variable expression is a string that can include a reference to a variable. The string is evaluated by replacing all references to variables with the value of the variable. A variable reference is a variable id placed inside parentheses preceded by a dollar sign.

For example, the variable expression "C:\Program Files\\$(InstallDirectory)" resolves to "C:\Program Files\Acme Software Product" if the value of the variable with the id "InstallDirectory" has the value "Acme Software Product".

The value of a variable that is replaced into a variable expression can itself have a variable reference. This reference is resolved before using the value. This nesting of variable expressions is unlimited. Any number of variable references can be used in a variable expression. If a variable expression string does not contain a variable reference, it is used as is.

A variable is considered defined if it has a value provided, even if that value is the empty string. A variable expression is considered valid if it contains no variable references, or if all contained variable references are defined.

Specifically, a *ResourceProperty* variable is undefined when the resource does not participate in the particular deployment or when the specified property has no value. A *Parameter* variable is undefined

when it has no default value and has no value provided by the deployer. A *DerivedVariable* that uses

2115 ConditionalExpression elements is undefined when none of its conditions evaluates to true, or the

2116 selected condition's value expression is not valid. A *DerivedVariable* that uses an unconditioned

2117 Expression is undefined when its value expression is undefined.

- To avoid an undefined *Parameter* variable, default parameter values may be used. To avoid an undefined
- 2119 ResourceProperty variable, replace references to the ResourceProperty variable with references to a
- 2120 Derived Variable defined to provide a default value in cases where the Resource Property is undefined.
 2121 This Derived Variable would define one expression, conditioned on the resource, that refers to the
- 2122 ResourceProperty variable and another, low priority, catch-all expression that defines the desired
- 2123 "default" value. Note that the default value in either of these cases MAY be an empty string, for example,

adiatic value. Note that the adiatic value in olater of these sales with 55 art ompty string, for example

2124 "". An empty string acts just like any other defined variable value. When the provided value of a variable is an empty string, the variable reference in a variable expression is replaced by an empty string.

4.6.2 BaseVariableType

2126

2127 2128

2129 2130

2131

2133

2138

2139

2140

2141

21422143

2144

2145

2146

2147

2148 2149

2150

2151




Figure 49: BaseVariableType structure.

Base Variable Type is the base type of the Derived Variable and Resource Property elements defined by Variables Type [4.6.3]. It provides the id attribute, which is used to reference the variable in a variable expression.


2132 4.6.2.1 BaseVariableType Property Summary

Name	Туре	*	Description
Description	DisplayTextType	01	Description of the variable.
ShortDescription	DisplayTextType	01	Short description of the variable.
id	xsd:ID	1	Identifier used for referencing the variable within the descriptor.
sensitive	xsd:boolean	01	A "true" value indicates the variable contains sensitive data.
			**default value="false"

4.6.2.2 BaseVariableType Property Usage Notes

- **Description, ShortDescription**: These elements MAY be used to provide human-understandable information. If used, they MUST provide a description of the variable.
- 2136 The Description element MUST be defined if the ShortDescription element is defined.
- See the *DescriptionGroup* section for structure and additional usage details [4.14.1].
 - id: Variables may be referenced in deployment descriptor elements of type VariableExpression within the scope of the variable. The scope of the variable includes the content element where defined and all nested content elements. Variables defined in the top level content element are also visible in Topology. The Variable is referenced by placing the variable id within parentheses preceded by a dollar sign.
 - For example, a variable with *id* value "InstallLocation" is referenced with the string "\$(InstallLocation)".
 - The *id* attribute may be useful to software that processes the SDD, for example, for use in creating log and trace messages.
 - **sensitive**: The *sensitive* attribute provides an indication of whether the data within a variable is likely to be considered sensitive. User name and password are examples of data that may be considered sensitive.
 - For example, *sensitive* data typically would not be displayed in a user interface, written to a log file, stored without protection, or in any way made visible except to authorized users.
- 2152 The default value is "false".

2153 **4.6.3 VariablesType**



21542155 Figure 50: VariablesType structure.

2159

2160

2161

21622163

There are three types of variables that can be defined in a content element: input parameter variables, variables that take the value of a resource property, and variables whose value is derived from a variable expression.

A variable is in scope for a particular deployment when the content element that defines the variable is in scope for that deployment.


4.6.3.1 VariablesType Property Summary

Name	Туре	*	Description
Parameters	ParametersType	0*	A list of variables whose values can be supplied as input to the deployment process.
ResourceProperty	ResourcePropertyType	0*	A variable whose value is set from the value of a resource property.
DerivedVariable	DerivedVariableType	0*	A set of expressions with optional associated conditions. The DerivedVariable's value is determined by evaluating the conditions and then setting the variable value to the result of the top priority expression from the set of expressions whose conditions evaluate to true.
	xsd:any	0*	

4.6.3.2 VariablesType Property Usage Notes

- Parameters: See the *ParametersType* section for structure and additional usage details [4.6.4].
- **ResourceProperty**: See the *ResourcePropertyType* section for structure and additional usage details [4.6.12].
- 2166 **DerivedVariable**: See the *DerivedVariableType* section for structure and additional usage details [4.6.13].

2168 4.6.4 ParametersType

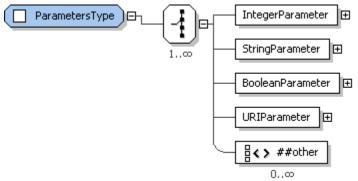

2170 Figure 51: ParametersType structure.

2169

2171 Parameters are variables whose value is expected to be received as input to the deployment process.
2172 The SDD author can specify multiple specific types of parameters, including validation rules for the values of the parameters.

2174 4.6.4.1 ParametersType Property Summary

Name	Туре	*	Description
IntegerParameter	IntegerParameterType	0*	An integer input parameter.
StringParameter	StringParameterType	0*	A string input parameter.
BooleanParameter	BooleanParameterType	0*	A boolean input parameter.
URIParameter	URIParameterType	0*	A Universal Resource Identifier input parameter.
	xsd:any	0*	

2175 **4.6.4.2 ParametersType Property Usage Notes**

- IntegerParameter: See the IntegerParameterType section for structure and additional usage details
 [4.6.6].
- **StringParameter**: See the *StringParameterType* section for structure and additional usage details [4.6.8].
- **BooleanParameter**: See the *BooleanParameterType* section for structure and additional usage details [4.6.10].
- **URIParameter**: See the *URIParameterType* section for structure and additional usage details [4.6.11].

2184 4.6.5 BaseParameterType

2185

21862187

2188

2189

2190

2191

2192

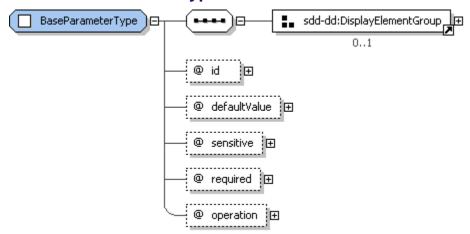


Figure 52: BaseParameterType structure.

BaseParameterType provides a default value, along with other attributes used by all parameter types. It also provides the *id* attribute, which is used to reference the parameter in variable expressions.

4.6.5.1 BaseParameterType Property Summary

Name	Туре	*	Description
DisplayName	DisplayTextType	01	Name of the parameter.
Description	DisplayTextType	01	Description of the parameter.
ShortDescription	DisplayTextType	01	Short description of the parameter.
id	xsd:ID	1	Identifier used for referencing the variable within the descriptor.
defaultValue	VariableExpressionType	01	Default value for the parameter.
sensitive	xsd:boolean	01	A "true" value indicates the variable contains sensitive data. **default value="false"
required	xsd:boolean	01	A "true" value indicates that a value for the parameter must be provided. **default value="true"
operation	OperationListType	01	The parameter is used when the specified operation(s) is (are) performed.

4.6.5.2 BaseParameterType Property Usage Notes

- **DisplayName**: This element MAY be used to provide human-understandable information. If used, it MUST provide a label for the parameter.
- 2193 See the *DisplayElementGroup* section for structure and additional usage details [4.14.2].
- Description, ShortDescription: These elements MAY be used to provide human-understandable information. If used, they MUST provide a description of the parameter.
- These elements may be used to assist the deployer in understanding the purpose and expected values for the parameters.
- The Description element MUST be defined if the ShortDescription element is defined.
- 2199 See the *DisplayElementGroup* section for structure and additional usage details [4.14.2].

• id: Parameters may be referenced in *DeploymentDescriptor* elements of type *VariableExpression* within the scope of the parameter variable. The scope of the variable includes the content element where the variable is defined and all nested content elements. Variables defined in the top level content element are also visible in *Topology*. The *Variable* is referenced by placing the variable *id* within parentheses preceded by a dollar sign.

For example, a variable with *id* value "InstallLocation" is referenced with the string "\$(InstallLocation)".

The *id* attribute may be useful to software that processes the SDD, for example, for use in creating log and trace messages.

defaultValue: The defaultValue is used if no other value is provided as input to the deployment process.

The value is interpreted based on the type of the defining parameter.

For example, the *defaultValue* for a *BooleanParameter* must be either "true" or "false"; the *defaultValue* for a *StringParameter* must be a string; etc.

See the VariableExpressionType section for structure and additional usage details [4.6.1].

sensitive: The sensitive attribute provides an indication of whether the data within a variable is likely
to be considered sensitive. User name and password are examples of data that may be considered
sensitive.

For example, *sensitive* data typically would not be displayed in a user interface, written to a log file, stored without protection, or in any way made visible except to authorized users.

- **required**: A "true" value for *required* indicates that a value for the parameter must be provided when the parameter is in scope for a particular deployment.
 - In cases where the parameter should be ignored when the value expression is not valid for a particular deployment, set required to "false".
 - A "false" value for the required attribute has no effect when defaultValue is set.
- **operation**: This attribute enables unique parameters to be defined per operation. Note that the use of a parameter for a particular operation is determined by a reference to the parameter in a variable expression or artifact argument used when performing that operation. The operation(s) associated with a parameter's use can be determined by examining its use in the SDD. The *operation* attribute provides a quick way to know which operation(s) will use the parameter without having to examine the use of the parameter.
 - All parameters defined within a *CompositeInstallable* are associated with the single operation supported by the *CompositeInstallalbe*. The *operation* attribute SHOULD NOT be set in this situation.
- See the *OperationListType* section for *operation* enumerations and their meaning [4.3.6].

4.6.6 IntegerParameterType

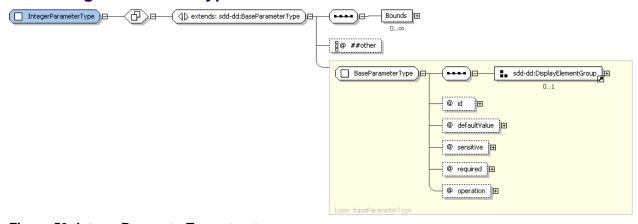


Figure 53: IntegerParameterType structure.

2237 *IntegerParameterType* defines upper and lower bounds that can be used to validate the input received for 2238 that parameter.

2239 **4.6.6.1 IntegerParameterType Property Summary**

Name	Туре	* Description	
	[extends] BaseParameterType		See the BaseParameterType section for additional properties [4.6.5].
Bounds	BoundaryType	0*	Specifies the boundaries for the value of the parameter.
	xsd:anyAttribute	0*	


2240 4.6.6.2 IntegerParameterType Property Usage Notes

- 2241 See the BaseParameterType section for details of the inherited attributes and elements [4.6.5].
- **Bounds**: If there are restrictions on the range of values that are valid for a parameter, those restrictions MUST be specified in *Bounds*.
- 2244 See the BoundaryType section for structure and additional usage details [4.6.7].

2245 4.6.7 BoundaryType

2246

2253



2247 Figure 54: BoundaryType structure.

2248 BoundaryType defines upper and lower bounds that can be used to validate the input received for that 2249 parameter.


2250 4.6.7.1 BoundaryType Property Summary

Name	Туре	*	Description
LowerBound	VariableExpressionType	01	Lowest valid value for the parameter.
UpperBound	VariableExpressionType	01	Highest valid value for the parameter.

2251 4.6.7.2 BoundaryType Property Usage Notes

- 2252 LowerBound: This variable expression MUST resolve to an integer.
 - If no LowerBound is specified, no integer value is too low.
- 2254 A LowerBound of "0" restricts the integer parameter to positive integer values.
- See the VariableExpressionType section for structure and additional usage details [4.6.1].
- 2256 UpperBound: This variable expression MUST resolve to an integer.
- 2257 If no *UpperBound* is specified, no integer value is too high.
- 2258 See the VariableExpressionType section for structure and additional usage details [4.6.1].

2259 4.6.8 StringParameterType

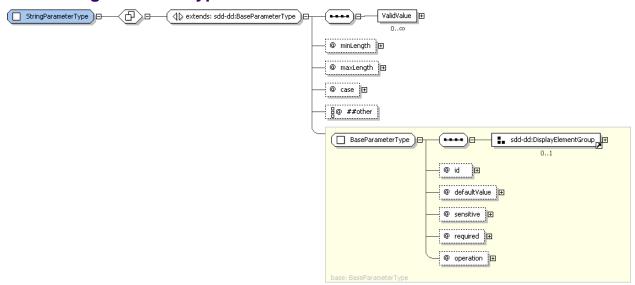

2261 Figure 55: StringParameterType structure.

2260

2262

2263

2264

22652266

2267

2272

StringParameterType supports definition of minimum and maximum lengths that can be used to validate the input received for the string parameter. It also supports definition of a list of valid input values.

4.6.8.1 StringParameterType Property Summary

Name	Type *		Description
	[extends] BaseParameterType		See the BaseParameterType section for additional properties [4.6.5].
ValidValue	xsd:string	0*	A string representing one valid value for the parameter.
minLength	xsd:positiveInteger	01	Minimum length of the parameter value.
maxLength	xsd:positiveInteger	01	Maximum length of the parameter value.
case	StringCaseType	01	The case of the string-"upper", "lower" or "mixed".
			**default value="mixed"
	xsd:anyAttribute	0*	

4.6.8.2 StringParameterType Property Usage Notes

See the BaseParameterType section for details of the inherited attributes and elements [4.6.5].

- **ValidValue**: Any number of valid values for the parameter can be listed using *ValidValue* elements.
- When both *defaultValue* and one or more *ValidValues* are specified, *defaultValue* MUST match one of the *ValidValues*.
- 2270 ValidValues should be in the correct case as identified in the case attribute.
- **minLength**: When no minimum length is specified, no string is too short, including an empty string.
 - maxLength: When no maximum length is specified, no string is too long.
- **case**: Used when the case of the string is restricted. Defaults to *mixed* if not defined.
- See the *StringCaseType* section for enumeration values and their meaning [4.6.9].

4.6.9 StringCaseType

2275

2282

2284

2285 2286

2287

2290 2291

2292

2293


2294

2276 StringCaseType defines the enumeration values for specifying case restrictions on a string parameter.

2277 4.6.9.1 StringCaseType Property Usage Notes

- 2278 lower: The string MUST be lower case.
- 2279 upper: The string MUST be upper case.
- 2280 mixed: The string SHOULD be mixed case.

2281 4.6.10 BooleanParameterType

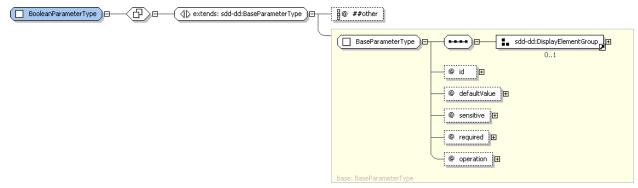

2283 Figure 56: BooleanParameterType structure.

BooleanParameterType extends BaseParameterType without adding any additional attributes or elements. When the defaultValue attribute is defined for a boolean parameter, its value MUST be either "true" or "false". See the BaseParameterType section for details of the inherited attributes and elements [4.6.5].

2288 4.6.10.1 BooleanParameterType Property Summary

Name	Туре	*	Description	
	[extends] BaseParameterType		See the BaseParameterType section for additional properties [4.6.5].	
	xsd:anyAttribute	0*		

2289 4.6.11 URIParameterType

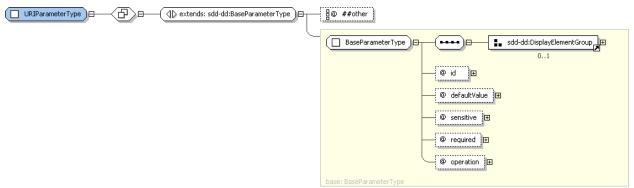


Figure 57: URIParameterType structure.

When the default value attribute is specified for a URI parameter, its value MUST be a valid Uniform Resource Identifier. See the *BaseParameterType* section for details of the inherited attributes and elements [4.6.5].

2295 **4.6.11.1 URIParameterType Property Summary**

Name	Туре	*	Description
	[extends] BaseParameterType		See the BaseParameterType section for additional properties [4.6.5].
	xsd:anyAttribute	0*	

2296 4.6.12 ResourcePropertyType

2297

2299

2300

2301 2302


2305

2306

2307

2308

2309

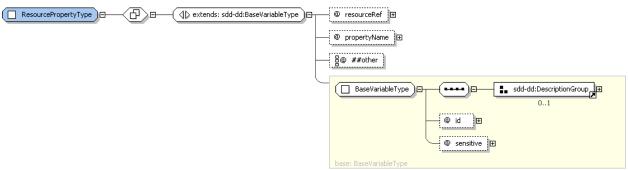

2298 Figure 58: ResourcePropertyType structure.

ResourcePropertyType provides the type definition for the ResourceProperty element of VariablesType [4.6.3]. ResourceProperty is a variable whose value is set from the property of a specific instance of a resource during a particular solution deployment. All content elements can define ResourceProperty elements.

2303 **4.6.12.1 ResourcePropertyType Property Summary**


Name	Туре	*	Description
	[extends] BaseVariableType		See the BaseVariableType section for additional properties [4.6.2].
resourceRef	xsd:IDREF	1	The resource in Topology that owns the property.
propertyName	xsd:QName	1	Name of the property whose value provides the variable's values.
	xsd:anyAttribute	0*	

2304 4.6.12.2 ResourcePropertyType Property Usage Notes

See the Base Variable Type section for details of the inherited attributes and elements [4.6.2].

- **resourceRef**: The *resourceRef* attribute MUST identify the resource in *Topology* that owns the property and will provide the value for *ResourceProperty*.
- **propertyName**: The *propertyName* attribute identifies the name of the resource property whose value is to be used as the value of *ResourceProperty*.

2310 **4.6.13 DerivedVariableType**

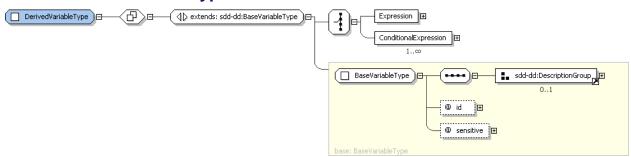

2312 Figure 59: DerivedVariableType structure.

2311

2313

2314

2315

2316

2317

2318

23192320

2323

23302331

2332

2333

A *DerivedVariable* defines a series of expressions with optional conditions. The value of the variable is determined by evaluating the boolean conditions and then setting the variable to the result of the top priority expression from the set of expressions whose conditions evaluate to true. This restriction does not apply to variables of the same name in different descriptors. The SDD author MUST create *DerivedVariables* in a way that makes the selection of the expression unambiguous.

4.6.13.1 DerivedVariableType Property Summary

Name	Туре	*	Description
	[extends] BaseVariableType		See the BaseVariableType section for additional properties [4.6.2].
Expression	VariableExpressionType	1	An expression whose results become the value of the variable.
ConditionalExpression	ConditionalDerivedVariableExpressionType	1*	An expression and an associated condition.

4.6.13.2 DerivedVariableType Property Usage Notes

- See the BaseVariableType section for details of the inherited attributes and elements [4.6.2].
- **Expression**: When the *DerivedVariable* is used to define one variable whose value is not conditional, the SDD author can include one variable expression defined in one *Expression* element.
 - See the VariableExpressionType section for structure and additional usage details [4.6.1].
- ConditionalExpression: When the variable will take one of a number of possible values depending on the characteristics of the resources that participate in the particular deployment, then one ConditionalExpression element is defined for each value-condition pair.
- See the *ConditionalDerivedVariableExpressionType* section for structure and additional usage details [4.6.14].

2329 4.6.14 ConditionalDerivedVariableExpressionType




Figure 60: ConditionalDerivedVariableExpressionType structure.

ConditionalDerivedVariableExpressionType is the type of the ConditionalExpression elements in derived variables. These elements associate a condition with a variable expression.

2334 4.6.14.1 Conditional Derived Variable Expression Type Property Summary

Name	Туре	*	Description
Condition	ConditionType	1	A set of resource characteristics that are evaluated to determine if the associated expression is a candidate for determining the value of the derived variable.
Expression	VariableExpressionType	1	Evaluation of this expression produces a candidate value for the derived variable.
priority	xsd:positiveInteger	01	A priority used as a tie-breaker when multiple expressions are available to determine the value of the variable. **default value="1"

2335 4.6.14.2 Conditional Derived Variable Expression Type Property Usage Notes

- Condition: Selection of conditioned expressions is based on the characteristics of one or more resources that participate in a particular solution deployment. These characteristics are defined in the Condition element.
- 2339 See the *ConditionType* section for structure and additional usage details [4.5.1].
- **Expression**: The *Expression* element contains the expressions that evaluate to a potential value of the *DerivedVariable*. Only one expression will be selected for use in a particular solution deployment.

 See the *VariableExpressionType* section for structure and additional usage details [4.6.1].
- **priority**: When multiple conditions evaluate to true for a particular deployment, the expression chosen is determined by the *priority* value. A higher priority is indicated by a lower value. "1" is the highest priority.

4.7 Requirements

2336

2337

2338

23462347

2348

2349

2350

2351 2352

2353

2354

2355

2356

2357

2362

2363

2365


2366

Requirements are defined by content elements. A Requirement consists of resource constraints that the SDD author states MUST be met prior to successful deployment or use of the software described by the SDD package. Each Requirement definition lists one or more deployment lifecycle operations to which the Requirement applies. When the Requirement is specified in an atomic content element, the operation associates the Requirement with artifacts within the atomic content element. (See the OperationType section for the mapping between operations and artifacts [4.3.7]. Note that the use operation indicates that the Requirement is associated with running of the software after deployment and not with content element artifacts.) When the Requirement is specified in a CompositeUnit or CompositeInstallable, the operation value MUST either be use or be the same top level operation as defined in the CompositeInstallable element. When the Requirement is specified for a ReferencedPackage, the operation associates the Requirement with a top level operation within the referenced SDD.

All *Requirements* specified for content elements that are in scope for a particular deployment MUST be met.

When a *Requirement* can be satisfied in more than one way, *Alternatives* can be defined within a *Requirement*. A *Requirement* is considered met when any one of the *Alternatives* is satisfied.

4.7.1 RequirementsType



2364 Figure 61: RequirementsType structure.

Requirements Type provides the type definition for Requirements in InstallableUnit and LocalizationUnit elements. It defines a list of Requirement elements.

2367 4.7.1.1 RequirementsType Property Summary

Name	Туре	*	Description
Requirement	RequirementType	1*	A requirement that must be met prior to processing the defining content element's artifacts.

2368 4.7.1.2 RequirementsType Property Usage Notes

- Requirement: The Requirements element contains a sequence of Requirement elements. The Requirement elements define requirements that MUST be met prior to successful processing of the content element's artifacts.
- See the *RequirementType* section for structure and additional usage details [4.7.2].

4.7.2 RequirementType

2369


2370

2371

2373

2374

2376 2377

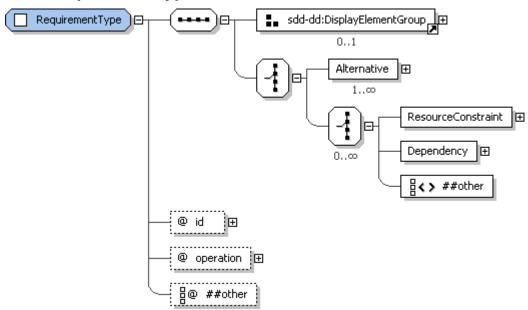

2375 Figure 62: RequirementType structure.

- A *Requirement* either directly defines a single set of resource constraints that MUST be met or defines one or more alternative sets of resource constraints, only one of which MUST be met.
- When multiple *Requirement* elements are declared for the same operation, all MUST be met prior to processing the associated artifact.
- 2380 The association is made between a requirement and an artifact via the *operation* attribute.

2381 **4.7.2.1 RequirementType Property Summary**

Name	Туре	*	Description
DisplayName	DisplayTextType	01	Name of the requirement.
Description	DisplayTextType	01	Description of the requirement.
ShortDescription	DisplayTextType	01	Short description of the requirement.
Alternative	AlternativeRequirementType	0*	An alternative that can satisfy the requirement.
ResourceConstraint	RequirementResourceConstraintType	0*	A set of constraints on one resource.

Dependency	InternalDependencyType	0*	A dependency on another content element.
	xsd:any	0*	
id	xsd:ID	1	Identifier for requirement scoped to the deployment descriptor.
operation	OperationListType	1	Requirement must be met before this operation is performed.
	xsd:anyAttribute	0*	

4.7.2.2 RequirementType Property Usage Notes

2382


2394

- **DisplayName**: This element MAY be used to provide human-understandable information. If used, it MUST provide a label for the requirement.
- See the *DisplayElementGroup* section for structure and additional usage details [4.14.2].
- **Description, ShortDescription**: These elements MAY be used to provide human-understandable information. If used, they MUST provide a description of the requirement.
- The Description element MUST be defined if the ShortDescription element is defined.
- See the *DisplayElementGroup* section for structure and additional usage details [4.14.2].
- 2390 Alternative: Alternative elements are used when a requirement can be satisfied in multiple ways.
- As a convenience for tooling that produces SDDs, it is also possible to define a single *Alternative*.

 This is semantically identical to directly defining *ResourceConstraints* under *Requirements*.
- To satisfy a requirement, at least one of the specified alternatives MUST be satisfied.
 - See the AlternativeRequirementType section for structure and additional usage details [4.7.3].
- **ResourceConstraint**: When a requirement can be satisfied in only one way, constraints MAY be defined directly under *Requirement* or in a single *Alternative* element.
- Constraints are defined using a sequence of *ResourceConstraints*. Every constraint in the sequence MUST be met for the requirement to be met.
- See the *RequirementResourceConstraintType* section for structure and additional usage details [4.7.5].
- Dependency: When one content element must be processed before another for any reason, a pre-req type Dependency MUST be defined. Reasons for a pre-requisite dependency include the use of an output variable from one artifact as an argument to another; the deployment of a resource before it is configured; and the configuration of a resource before deployment of another resource that depends on it.
 - See the InternalDependencyType section for structure and additional usage details [4.7.6].
- **id**: The *id* attribute may be useful to software that processes the SDD, for example, for use in creating log and trace messages.
- operation: A Requirement is associated with application of one or more operations by setting its
 operation attribute value to one of the enumerated values defined in OperationListType [4.3.6].
- If the *Requirement* is not a pre-requisite for application of an operation, but rather is required before the resulting resources are considered usable, then the value SHOULD be set to *use*. (Note that a completion action may also be required before a resulting resource is considered usable. See the *CompletionType* section [4.3.14].)
- The value of *operation* for a *Requirement* defined in an atomic content element MUST be set either to use or to an *operation* that is associated with an artifact element defined in the content element's *Artifacts*. The *operation* value(s) associate the *Requirement* with one or more artifact(s).

- When the *Requirement* is specified in a *CompositeUnit* or *CompositeInstallable*, the *operation* value MUST be set either to *use* or be the same top level *operation* as defined in the *CompositeInstallable* element.
- There is no default value for *operation*. The SDD author must define it explicitly.
- See the *OperationType* section for enumeration values and their meaning [4.3.7].

2423 4.7.3 AlternativeRequirementType

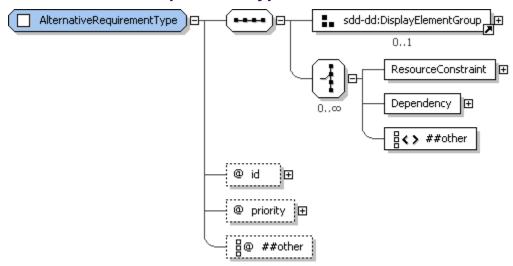

2425 Figure 63: AlternativeRequirementType structure.

2424

2426

2427

2428

2430 2431 AlternativeRequirementType provides the type definition for Alternative elements used within requirements to define alternative sets of resource constraints that will satisfy the requirement.

4.7.3.1 AlternativeRequirementType Property Summary

Name	Туре	*	Description
DisplayName	DisplayTextType	01	Name of the alternative.
Description	DisplayTextType	01	Description of the alternative.
ShortDescription	DisplayTextType	01	Short description of the alternative.
ResourceConstraint	RequirementResourceConstraintType	1*	A set of requirements on one resource.
Dependency	InternalDependencyType	0*	A dependency on another content element.
	xsd:any	0*	
id	xsd:ID	1	Identifier for the alternative scoped to the deployment descriptor.
priority	xsd:positiveInteger	01	Assists in determining alternative selected when multiple alternatives evaluate to true. **default value="1"
	xsd:anyAttribute	0*	

2429 4.7.3.2 AlternativeRequirementType Property Usage Notes

 DisplayName: This element MAY be used to provide human-understandable information. If used, it MUST provide a label for the alternative requirement.

- 2432 See the *DisplayElementGroup* section for structure and additional usage details [4.14.2].
- **Description, ShortDescription**: These elements MAY be used to provide human-understandable information. If used, they MUST provide a description of the alternative requirement.
- The Description element MUST be defined if the ShortDescription element is defined.
- 2436 See the *DisplayElementGroup* section for structure and additional usage details [4.14.2].
- **ResourceConstraint**: Every *ResourceConstraint* defined in a single *Alternative* MUST be met for the alternative requirement to be considered satisfied.
- See the *RequirementResourceConstraintType* section for structure and additional usage details [4.7.5].
- Dependency: When one content element must be processed before another for any reason, a pre-req type Dependency MUST be defined. Reasons for a pre-requisite dependency include the use of an output variable from one artifact as an argument to another; the deployment of a resource before it is configured; and the configuration of a resource before deployment of another resource that depends on it.
- See the *InternalDependencyType* section for structure and additional usage details [4.7.6].
- **id**: The *id* attribute may be useful to software that processes the SDD, for example, for use in creating log and trace messages.
 - priority: If there are multiple satisfied alternatives during a particular solution deployment, one of the alternatives must be selected. The *priority* attribute communicates the SDD author's prioritization of the alternatives. A lower number represents a higher priority with "1" representing the highest priority. Other inputs may also be used to select an alternative. The criteria for making this selection are outside of the scope of the SDD.

4.7.4 ResourceConstraintGroup

2449

2450

2451 2452

2453

2454

2455

2456

2457

2458

2459

2460

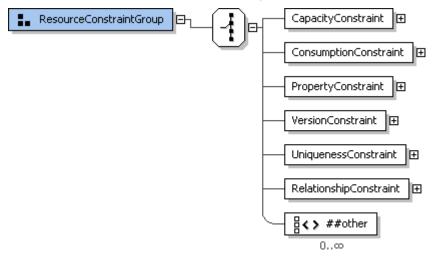


Figure 64: ResourceConstraintGroup structure.

The elements of *ResourceConstraintGroup* are used when defining content element requirements on resources. The *ResourceConstraint* element is used to group one or more constraints on a single resource.

4.7.4.1 ResourceConstraintGroup Property Summary

Name	Туре	*	Description
CapacityConstraint	CapacityConstraintType	01	A bound on a quantifiable property of a resource.
ConsumptionConstraint ConsumptionConstraintType		01	A required quantity of a property of a resource in any state.

PropertyConstraint	PropertyConstraintType	01	A required value or set of values of a property.
VersionConstraint VersionConstraintType		01	A required value or set of values of a version property.
UniquenessConstraint	UniquenessConstraintType	01	A required mapping of two resources in the topology to unique instances in the deployment environment.
RelationshipConstraint	RelationshipConstraintType	01	A required relationship between the resource identified in the resourceRef and another resource in the topology.
	xsd:any	0*	

4.7.4.2 ResourceConstraintGroup Property Usage Notes

24612462

2463

2464

2465

24662467

2468 2469

2471

2472

2473

2474

2475

2476


24772478

2479

2480

- CapacityConstraint: CapacityConstraint elements are used in ResourceConstraints to express constraints on the available capacity of a particular property of a particular resource.
 - A *CapacityConstraint* tests a numeric value representing a bound on a quantifiable property of a resource, such as processor speed. The test may be for a lower (minimum) or upper (maximum) bound. This constraint differs from a *ConsumptionConstraint* in that it is comparative, not cumulative.
- When multiple *CapacityConstraint* elements are defined by content elements participating in a particular solution deployment apply to the same property of the same resource, the most restrictive constraint applies.
- See the CapacityConstraintType section for structure and additional usage details [4.4.1].
 - ConsumptionConstraint: ConsumptionConstraint elements are used in ResourceConstraints to express constraints on the quantity of a particular property of a specific resource that is available for consumption.
 - A *ConsumptionConstraint* defines a required quantity of a consumable resource property. The *ConsumptionConstraint* is cumulative rather than comparative.
 - An example of a consumable resource property is the disk space property of a file system resource.
 - When multiple *ConsumptionConstraint* elements are defined for the same resource by content elements participating in a particular solution deployment, the sum of all the expressed consumption constraints must be met by the resource.
 - See the ConsumptionConstraintType section for structure and additional usage details [4.4.3].
- PropertyConstraint: PropertyConstraint elements are used in ResourceConstraints to indicate that specific resource properties must have a specific value or set of values.
- See the *PropertyConstraintType* section for structure and additional usage details [4.4.5].
- **VersionConstraint**: *VersionConstraint* elements are used in *ResourceConstraints* to express a constraint on the version of a specific resource.
- A *VersionConstraint* defines a required resource version or a range of versions. It MAY include a certified version or range of versions representing a more restrictive set of versions whose use carries a higher degree of confidence.
- Version formats and comparison rules vary greatly. The SDD does not provide information on how to interpret version strings.
- 2492 See the VersionConstraintType section for structure and additional usage details [4.4.7].
- **UniquenessConstraint**: *UniquenessConstraint* elements are used in *ResourceConstraints* to indicate when two resources defined in topology MUST or MUST NOT resolve to the same resource instance during a particular deployment.
- See the *UniquenessConstraintType* section for structure and additional usage details [4.4.12].
- **RelationshipConstraint**: RelationshipConstraint elements are used in ResourceConstraints to indicate a constraint on a particular relationship between resources.

2500 4.7.5 RequirementResourceConstraintType

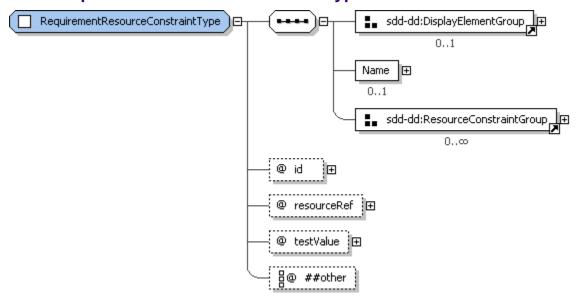

2501 2502

2503 2504

2505

Figure 65: RequirementResourceConstraintType structure.

ResourceConstraintType provides the Type section for the ResourceConstraint element in content element Requirements. A ResourceConstraint is a set of zero or more constraints on one resource.

4.7.5.1 RequirementResourceConstraintType Property Summary

Name	Туре	*	Description
DisplayName	DisplayTextType	01	Name for the resource constraint.
Description	DisplayTextType	01	Description of the resource constraint.
ShortDescription	DisplayTextType	01	Short description of the resource constraint.
Name	VariableExpressionType	01	The name of the resource.
CapacityConstraint	CapacityConstraintType	01	A capacity constraint that applies to the resource identified in resourceRef.
ConsumptionConstraint	ConsumptionConstraintType	01	A consumption constraint that applies to the resource identified in resourceRef.
PropertyConstraint	PropertyConstraintType	01	A property constraint that applies to the resource identified in resourceRef.
VersionConstraint	VersionConstraintType	01	A version constraint that applies to the resource identified in resourceRef.
UniquenessConstraint	UniquenessConstraintType	01	A required mapping of two resources in the topology to unique instances in the deployment environment.
RelationshipConstraint	RelationshipConstraintType	01	A required relationship between the resource identified in the resourceRef and another resource in the topology.
	xsd:any	0*	
id	xsd:ID	1	Identifier for the ResourceConstraint scoped to the

			deployment descriptor.
resourceRef	xsd:IDREF	1	Reference to a resource specification in topology.
testValue	xsd:boolean	01	Indicates whether the ResourceConstraint must evaluate to true or to false. **default value="true".
	xsd:anyAttribute	0*	

2506 4.7.5.2 RequirementResourceConstraintType Property Usage Notes

- **DisplayName**: This element MAY be used to provide human-understandable information. If used, it MUST provide a label for the resource constraint.
- 2509 See the *DisplayElementGroup* section for structure and additional usage details [4.14.2].
- **Description, ShortDescription**: These elements MAY be used to provide human-understandable information. If used, they MUST provide a description of the resource constraint.
- The Description element MUST be defined if the ShortDescription element is defined.
- See the *DisplayElementGroup* section for structure and additional usage details [4.14.2].
- **Name**: This name is used to identify the resource in the deployment environment. If the resource identified by *resourceRef* does not have the name defined here, then the constraint is not met.
- See the *VariableExpressionType* section for structure and additional usage details [4.6.1].
- CapacityConstraint, ConsumptionConstraint, PropertyConstraint, VersionConstraint,
 UniquenessConstraint, RelationshipConstraint: See the ResourceConstraintGroup section for structure and additional usage of the individual constraints [4.7.4].
 - **id**: The *id* attribute may be useful to software that processes the SDD, for example, for use in creating log and trace messages.
- 2522 resourceRef: This is the resource to which the constraints apply.
 - This reference MUST refer to the *id* of a resource in *Topology*.
- 2524 **testValue**: When the result of evaluating *Name* and all of the constraints defined in the *ResourceConstraint* matches the value of *testValue*, the *ResourceConstraint* is considered met.
- When no *Name* or constraints are defined, and *testValue* is "true", the constraint is met if the resource exists as defined in topology.
- When no *Name* or constraints are defined, and *testValue* is "false", the constraint is met if the resource, as defined in topology, does not exist.

4.7.6 InternalDependencyType

2520 2521

2523

2530

25312532

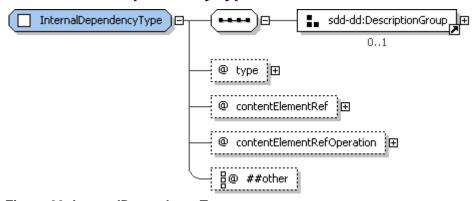


Figure 66: InternalDependencyType structure.

InternalDependencyType provides the type definition for Dependency elements defined in all types of content elements. Dependency elements allow the expression of dependence on the application of a particular operation to a content element defined in the deployment descriptor before application of a particular operation on the defining content element. The dependency is associated with an operation on the defining content element by the operation attribute in the Requirement defining the Dependency element. The dependency is associated with an operation on the depended on content element by the contentRefOperation attribute in the Dependency. There are three types of dependencies: pre-requisites, co-requisites and ex-requisites.

4.7.6.1 Internal Dependency Type Property Summary

2533

2534

2535

2536

2537

2538

2539

2540

2541

2542

2559

25612562

2563

2564

Name	Туре	*	Description
Description	DisplayTextType	01	A human-understandable description of the dependency.
ShortDescription	DisplayTextType	01	A short human-understandable description of the dependency.
type	DependencyType	01	Type can be "pre-req", "co-req", or "ex-req". **default value="pre-req"
contentElementRef	xsd:IDREF	1	A reference to the content element which is depended on.
contentElementRefOperation	OperationListType	01	The dependency is on application of this operation to the content element identified in contentRef.
	xsd:anyAttribute	0*	

4.7.6.2 Internal Dependency Type Property Usage Notes

- **Description, ShortDescription**: These elements MAY be used to provide human-understandable information. If used, they MUST provide a description of the dependency.
- The Description element MUST be defined if the ShortDescription element is defined.
- 2546 See the *DescriptionGroup* section for structure and additional usage details [4.14.1].
- **type**: See the *DependencyType* section for an explanation of the semantics of each of the possible dependency types [4.7.7].
- **contentElementRef**: The *contentElementRef* value is the *id* of the content element that is depended on.
- The value MUST reference the *id* of a content element.
- **contentElementRefOperation**: When the depended-on content element is an atomic content element, the operation defined here effectively identifies the artifact that must be processed for a prerequisite or co-requisite or not processed for an ex-requisite.
- When the depended-on content element is a *CompositeUnit*, the operation defined in contentElementRefOperation MUST be the top level operation defined by the containing CompositeInstallable.
- See the *OperationListType* section for structure and additional usage details [4.3.6].

4.7.7 DependencyType

2560 The *DependencyType* enumeration provides the value for the *type* attribute in *Dependency* elements.

4.7.7.1 DependencyType Property Usage Notes

• **pre-req**: A *pre-req* dependency is satisfied if the other content element is in scope for the deployment. The *pre-req* indicates that the other content element MUST be processed before the content element that defines the *pre-req*.

- The dependency is not met if the other content element is not in scope.
- **co-req**: A *co-req* dependency is satisfied if the other content element is in scope for the deployment. There is no dependence on order of processing.
- The dependency is not met if the other content element is not in scope.
- **ex-req**: An *ex-req* dependency indicates that the other content element MUST NOT be in scope.

 The dependency is not met if the other content element is in scope.

2571 **4.7.8 RequiredBaseType**

2572 2573

2574

2575

2576

2577

2578

2579

2580

25812582

2583

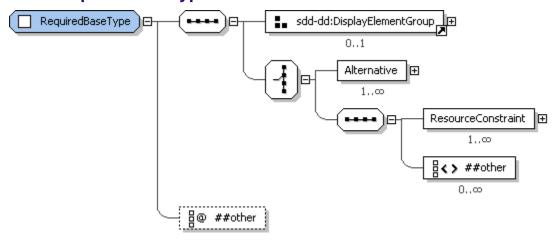


Figure 67: RequiredBaseType structure.

RequiredBase Type provides the type definition for the RequiredBase element of InstallableUnit and LocalizationUnit elements and the LocalizationBase element of LocalizationUnits. These elements declare the identity characteristics of one or more resources that will be modified or localized by applying of the content element's artifacts. Definition of a RequiredBase element represents a requirement that a resource matching the declared characteristic exists. Definition of a LocalizationBase element represents a condition on the existence of a resource that matches the declared characteristics.

4.7.8.1 RequiredBaseType Property Summary

Name	Туре	*	Description
DisplayName	DisplayTextType	01	Display name for the requirement on a resource to serve as the base of an update or localization.
Description	DisplayTextType	01	Description of the requirement. Required if ShortDescription is defined.
ShortDescription	DisplayTextType	01	Short description of the requirement.
Alternative	AlternativeRequiredBaseConstraintType	0*	Alternative set of constraints on a required base resource.
ResourceConstraint	RequiredBaseConstraintType	1*	Constraints on the required base resource.
	xsd:any	0*	
	xsd:anyAttribute	0*	

4.7.8.2 RequiredBaseType Property Usage Notes

• **DisplayName**: This element MAY be used to provide human-understandable information. If used, it MUST provide a label for the required base element.

- 2584 See the *DisplayElementGroup* section for structure and additional usage details [4.14.2].
- **Description, ShortDescription**: These elements MAY be used to provide human-understandable information. If used, they MUST provide a description of the required base for this content element.
- The Description element MUST be defined if the ShortDescription element is defined.
- 2588 See the *DisplayElementGroup* section for structure and additional usage details [4.14.2].
- Alternative: When more than one resource can be used as the update or localization base, two or more Alternative elements are defined to describe the choices. As a convenience for tooling that produces SDDs, a single Alternative can be defined in place of a ResourceConstraint.
 - See the *AlternativeRequiredBaseConstraintType* section for structure and additional usage details [4.7.10].
- ResourceConstraint: ResourceConstraints defined here identify one or more particular resources that can serve as the update or localization base. If ResourceConstraints are defined for multiple resources, they are all updated or localized by application of the content element.
 - See the RequiredBaseConstraintType section for structure and additional usage details [4.7.9].

4.7.9 RequiredBaseConstraintType

2592 2593

2597

2598

2599 2600

2601 2602

2603

2604

2605

2606

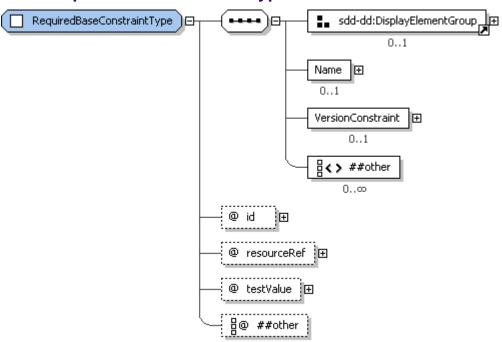


Figure 68: RequiredBaseConstraintType structure.

RequiredBaseConstraintType provides the type definition for the ResourceConstraint elements used in RequiredBase and LocalizationBase elements. A required base definition differs from a requirement definition in the limited nature of the constraints that can be specified. The purpose of constraints within a required base is to identify resource instances that can be correctly updated or localized by the content element. Only constraints related to the basic identity characteristics of the resource are allowed.

4.7.9.1 RequiredBaseConstraintType Property Summary

Name	Туре	*	Description
DisplayName	DisplayTextType	01	Name of the constraint.
Description	DisplayTextType	01	Description of the constraint.
ShortDescription	DisplayTextType	01	Short description of the constraint.

sdd-spec-v1.0-os.doc Copyright © OASIS® 2007, 2008. All Rights Reserved.

Name	VariableExpressionType	01	Name of the required base resource as understood in the deployment environment.
VersionConstraint	VersionConstraintType	01	Allowed versions for the required base resource.
	xsd:any	0*	
id	xsd:ID	1	Constraint identifier scoped to the deployment descriptor.
resourceRef	xsd:IDREF	1	Reference to the resource representing the required base for an update operation.
testValue	xsd:boolean	01	Defines the desired result of the required base constraint **default value="true"
	xsd:anyAttribute	0*	

4.7.9.2 RequiredBaseConstraintType Property Usage Notes

2607

2613

2615

2616


26172618

2619

2620

- **DisplayName**: This element MAY be used to provide human-understandable information. If used, it MUST provide a label for the constraint.
- 2610 See the *DisplayElementGroup* section for structure and additional usage details [4.14.2].
- **Description, ShortDescription**: These elements MAY be used to provide human-understandable information. If used, they MUST provide a description of the constraint on the required base.
 - The Description element MUST be defined if the ShortDescription element is defined.
- See the *DisplayElementGroup* section for structure and additional usage details [4.14.2].
 - **Name**: The *Name* element provides the name by which the resource is known in the deployment environment. The value of *Name* is compared to resource names found in the deployment environment as part of constraint evaluation.
 - If the resource name is declared in the referenced resource definition, it SHOULD NOT be declared here. If the resource name is changed by application of the update, the original name SHOULD be declared here and the updated name SHOULD be declared in *ResultingResource*. The name declared here is always the one that represents the required value for the required base.
- 2622 See the VariableExpressionType section for structure and additional usage details [4.6.1].
- **VersionConstraint**: The *VersionConstraint* element defines the set of versions that can serve as a base for the update.
- 2625 See the VersionConstraintType section for structure and additional usage details [4.4.7].
- id: The *id* attribute may be useful to software that processes the SDD, for example, for use in creating log and trace messages.
- resourceRef: The resourceRef attribute value MUST reference the *id* of the resource element in *Topology* to which this constraint refers.
- **testValue**: The required base constraint is met when the boolean result of comparing the declared name and/or version to the actual name and/or version is equal to the boolean value specified in testValue.
- Because the purpose of a required base constraint is to positively identify one or more resources that can serve as the base for an update or localization, there MUST always be one *ResourceConstraint* that has *testValue* set to "true".
- Additional *ResourceConstraints* can be defined with *testValue* set to "false". These constraints identify characteristics of the same required base resource that must not be true for that resource to serve as the base.

2639 4.7.10 AlternativeRequiredBaseConstraintType

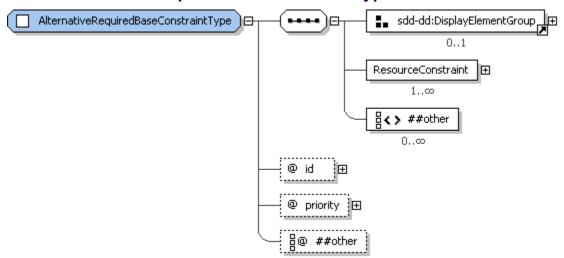

2641 Figure 69: AlternativeRequiredBaseConstraintType structure.

2640

2642

2643

2644

2645 2646

2647

2648

2649

26502651

2652

2653

2654

2655

AlternativeRequiredBaseConstraintType provides the type definition for the Alternative elements used in RequiredBase and LocalizationBase elements.

4.7.10.1 AlternativeRequiredBaseConstraintType Property Summary

Name	Туре	*	Description
DisplayName	DisplayTextType	01	Name of the constraint.
Description	DisplayTextType	01	Description of the constraint.
ShortDescription	DisplayTextType	01	Short description of the constraint.
ResourceConstraint	RequiredBaseConstraintType	1*	A set of requirements on one resource.
	xsd:any	0*	
id	xsd:ID	1	Constraint identifier scoped to the deployment descriptor.
priority	xsd:positiveInteger	01	Assists in determining alternative selected when multiple alternatives evaluate to true. **default value="1"
	xsd:anyAttribute	0*	

4.7.10.2 AlternativeRequiredBaseConstraintType Property Usage Notes

- DisplayName: This element MAY be used to provide human-understandable information. If used, it MUST provide a label for the alternative.
 - See the DisplayElementGroup section for structure and additional usage details [4.14.2].
- **Description, ShortDescription**: These elements MAY be used to provide human-understandable information. If used, they MUST provide a description of the alternative.
- The Description element MUST be defined if the ShortDescription element is defined.
 - See the DisplayElementGroup section for structure and additional usage details [4.14.2].
- ResourceConstraint: ResourceConstraints defined here identify one or more particular resources that can serve as the update or localization base. If ResourceConstraints are defined for multiple resources, they are all updated or localized by application of the content element.

- 2656 See the RequiredBaseConstraintType section for structure and additional usage details [4.7.9].
- id: The *id* attribute may be useful to software that processes the SDD, for example, for use in creating log and trace messages.
 - priority: If there are multiple satisfied alternatives during a particular solution deployment, one of the alternatives must be selected. The *priority* attribute communicates the SDD author's prioritization of the alternatives. A lower number represents a higher priority with "1" representing the highest priority. Other inputs may also be used to select an alternative. The criteria for making this selection are outside of the scope of the SDD.

4.8 Resulting and Changed Resources

Deployment of an SDD package creates or modifies software resources. These resources are included in the *Topology* definition and described in more detail in *ResultingResource* and *ResultingChange* elements.

The SDD author can choose to model resulting and modified resources at a very granular level, at a very coarse level; at any level in between, or not at all. An example of modeling resulting resources at a granular level would be modeling every file created by the deployment as a resulting resource. An example of modeling resulting resources at a very coarse level would be modeling the software product created by deployment as a single resulting resource. The choice depends on the needs of the solution deployment. If a resource is not modeled in the SDD, no requirements can be expressed on it, no conditions can be based on it and no variables can be set from values of its properties. It cannot play any of the roles described for resources in the *ResourceType* section of this document [4.2.2].

4.8.1 ResultingResourceType

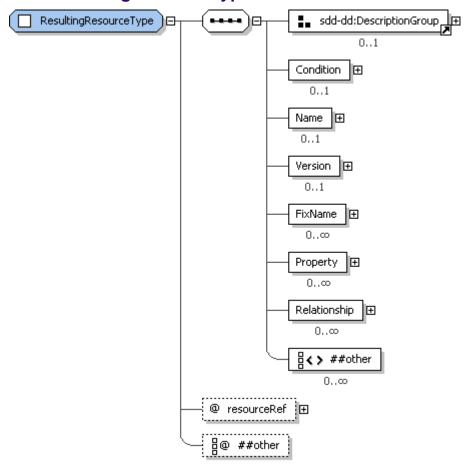


Figure 70: ResultingResourceType structure.

2679 InstallableUnit and LocalizationUnit content elements can include zero or more ResultingResource 2680 elements that describe the key resources installed or updated when the content element's artifacts are processed. The type definition for these elements is provided by ResultingResourceType. 2681 ResultingResource elements refer to resources in topology and define characteristics of those resources 2682 2683 that will become true when the artifact is applied. The deployment descriptor author MAY omit the 2684 ResultingResource element from the content element and the definition of the resource from Topology 2685 when no knowledge of their existence is required for deployment of the solution or for aggregation of the solution. Characteristics that exist in ResultingResource and elsewhere, such as Topology or 2686 2687 ResultingChange, MUST NOT conflict.

For example, if *Topology* specifies a property that indicates that a file must be writable, it would be incorrect for *ResultingResource* to specify that the resulting file resource is read-only.

Example uses of the *ResultingResource* element are to:

2688

2689

2690

2691

2692

2693

2694 2695

2696

26972698

2699

2700

2701

2703

27042705

- determine whether potentially resulting resources will actually be installed or updated;
- identify the resource associated with a content element that may be subsequently uninstalled using the uninstall information in this SDD;
- discover the components of a logical solution resource previously installed using this SDD;
- check whether or not a content element has already been installed.

4.8.1.1 ResultingResourceType Property Summary

Name	Туре	*	Description
Description	DisplayTextType	01	Description of the effect of the content element on the resulting resource.
ShortDescription	DisplayTextType	01	Short description of the effect of the content element on the resulting resource.
Condition	ConditionType	01	A condition that determines if the resulting resource definition is relevant to a particular deployment.
Name	VariableExpressionType	01	Name of the resulting resource as known in the deployment environment.
Version	VersionType	01	Version of the resulting resource.
FixName	xsd:string	0*	Name of a resulting fix.
Property	ResultingPropertyType	0*	A resulting property setting of the resulting resource.
Relationship	RelationshipType	0*	A relationship that will exist after creating or updating the resource.
	xsd:any	0*	
resourceRef	xsd:IDREF	1	Reference to a resource in topology.
	xsd:anyAttribute	0*	

4.8.1.2 ResultingResourceType Property Usage Notes

- Description, ShortDescription: These elements MAY be used to provide human-understandable information. If used, they MUST provide a description of the effect of the content element on the resulting resource.
- The Description element MUST be defined if the ShortDescription element is defined.
- 2702 See the *DescriptionGroup* section for structure and additional usage details [4.14.1].
 - **Condition**: A *Condition* is used when the resulting resource will be created by the content element only when certain conditions exist in the deployment environment.
 - See the *ConditionType* section for structure and additional usage details [4.5.1].

- Name: The name of the resulting resource SHOULD be defined in the ResultingResource element and not in Topology when the content element installs the resulting resource. The resource name comes into existence when the resulting resource is created. When the content element updates the resulting resource without changing the resource name, Name SHOULD be defined in Topology.
 Name SHOULD NOT be defined in both places. If a resource name is defined in both Topology and ResultingResource, the values MUST match.
- 2712 See the *VariableExpressionType* section for structure and additional usage details [4.6.1].
- Version: This is the version of the resource after processing the content element's artifacts. Version
 SHOULD be defined for all resulting resources.
 - For example, when update artifacts are processed, this version describes the resource after the update is complete.
 - See the *VersionType* section for structure and additional usage details [3.10].
 - **FixName**: Multiple *FixName* elements MAY be included to identify the resulting resource fixes that will exist once the content element is applied. The *FixName* SHOULD match the names of fixes that can be detected on the system.
- Property: Property elements SHOULD be included to identify property values of the resulting resource that will exist after applying the content element.
- 2723 Properties of the resulting resource SHOULD be defined in the *ResultingResource* element and not in 2724 *Topology*. They SHOULD NOT be defined in both places. If a property is defined in both *Topology* and *ResultingResource*, the values MUST match.
- See the ResultingPropertyType section for structure and additional usage details [4.2.4].
 - **Relationship**: Relationship elements SHOULD be included to identify relationships that will exist after applying the content element.
 - See the RelationshipType section for structure and additional usage details [4.8.3].
- **resourceRef**: The *resourceRef* attribute MUST identify the resource in *Topology* that will be installed or updated when the defining content element is applied.

4.8.2 ResultingChangeType

2715

27162717

2718

2719

2720

2727

27282729

2732

27332734

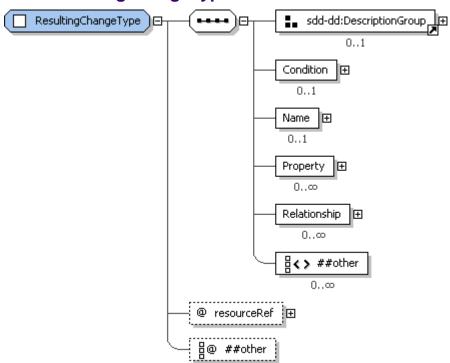


Figure 71: ResultingChangeType structure.

2739 4.8.2.1 ResultingChangeType Property Summary

Name	Туре	*	Description
Description	DisplayTextType	01	Description of the effect of the content element on the changing resource.
ShortDescription	DisplayTextType	01	Short description of the effect of the content element on the changing resource.
Condition	ConditionType	01	A condition that determines if the resulting change definition is relevant to a particular deployment.
Name	VariableExpressionType	01	Name of the resulting resource as known in the deployment environment.
Property	ResultingPropertyType	0*	A resulting property setting of the changing resource.
Relationship	RelationshipType	0*	Specifies a relationship(s) with another resource that will result from this deployment.
	xsd:any	0*	
resourceRef	xsd:IDREF	1	Reference to the resource in topology that will be changed by application of the content element.
	xsd:anyAttribute	0*	

2740 4.8.2.2 ResultingChangeType Property Usage Notes

2741

27422743

2753

2759

2760

- Description, ShortDescription: These elements MAY be used to provide human-understandable information. If used, they MUST provide a description of the effect of the content element on the changing resource.
- The Description element MUST be defined if the ShortDescription element is defined.
- 2745 See the *DescriptionGroup* section for structure and additional usage details [4.14.1].
- **Condition**: A *Condition* is used when the resulting change will be performed by applying the content element only when certain conditions exist in the deployment environment.
- See the *ConditionType* section for structure and additional usage details [4.5.1].
- Name: The Name corresponds with the name of the changed resource as known in the deployment environment. Name SHOULD be defined in Topology and not in ResultingChange, because the name is not changed by processing the content elements artifacts. If Name is defined in both places, the values MUST match.
 - See the VariableExpressionType section for structure and additional usage details [4.6.1].
- Property: *Property* elements MAY be included to identify property values of the identified resource as they will exist after applying the content element.
- 2756 Properties defined in *ResultingChange* MUST be properties that are modified by processing the content element's artifacts.
- 2758 See the ResultingPropertyType section for structure and additional usage details [4.2.4].
 - Relationship: When application of the content element results in the creation or modification of relationships, the *Relationship* elements SHOULD be included to identify relationships as they will exist after application of the content element.
- 2762 See the *RelationshipType* section for structure and additional usage details [4.8.3].

resourceRef: The *resourceRef* attribute MUST identify the resource whose configuration will be modified when the defining content element is applied.

The value MUST reference the *id* of a resource specified in *Topology*.

4.8.3 RelationshipType

2765

2766

2767

2769

27712772

2773

27742775

2776


2777

27782779

2780

2781

2782

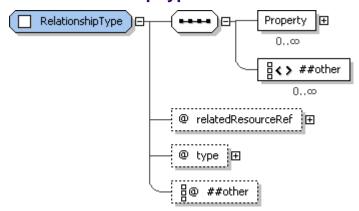

2768 Figure 72: RelationshipType structure.

4.8.3.1 RelationshipType Property Summary

Name	Туре	*	Description
Property	PropertyType	0*	A property definition that further constrains the relationship.
	xsd:any	0*	
relatedResourceRef	xsd:IDREF	1	The second resource in the relationship.
type	xsd:QName	1	The type of the relationship.
	xsd:anyAttribute	0*	

2770 4.8.3.2 RelationshipType Property Usage Notes

Property: This element MAY be used to provide additional information about the relationship.

For example, a connectivity relationship might specify additional information such as the specific protocol used (for instance, TCP/IP) and/or particular characteristics of a protocol (for instance, port number).

See the *PropertyType* section for structure and additional usage details [4.2.3].

• **relatedResourceRef**: There are two resources in any relationship. The first is the resource defined in the *resourceRef* of the *ResultingResource* or *RelationshipConstraint* element that defines the *Relationship* element. The second resource is the one identified by *relatedResourceRef*.

The value MUST reference the *id* of a resource specified in *Topology*.

• **type**: Values for relationship type are not defined by the SDD specification. This type may be specified in profiles [5.3].

4.9 Composite Content Elements

2783 Composite content elements organize the content of an SDD but do not define artifacts used to deploy
2784 SDD content. There are three types of composite content elements: *CompositeInstallable*, *CompositeUnit*2785 and *CompositeLocalizationUnit*.

- 2786 CompositeInstallable is used any time that more than one content element is defined in support of one 2787 operation on the package; any time aggregation of SDDs is needed or any time the package includes 2788 selectable content. 2789 CompositeInstallable is the root of a content hierarchy that supports a single deployment lifecycle 2790 operation. It can define a base content hierarchy, a localization content hierarchy, and/or a selectable 2791 content hierarchy and selection criteria. Base content defines content that is deployed by default. Selectable content defines content that can be selected or not by the deployer. Localization content 2792 defines content that provides language support. One SDD can have more than one 2793 2794 CompositeInstallable—each supporting a different operation. 2795 CompositeUnit is used to organize content elements within the base or selectable content hierarchies. CompositeUnits can define InstallableUnits, ConfigurationUnits, ContainedPackages and other 2796 CompositeUnits. Requirements, conditions and variables that are common to all content elements defined 2797 2798 by the CompositeUnit can be defined on the CompositeUnit to avoid repetition. Within the selectable
- content hierarchy, a *CompositeUnit* can provide an efficient means for selection of a set of related content elements by a *Feature*.
- 2801 CompositeLocalizationUnit is described in the Localization section [4.13].

2802 4.9.1 CompositeInstallableType

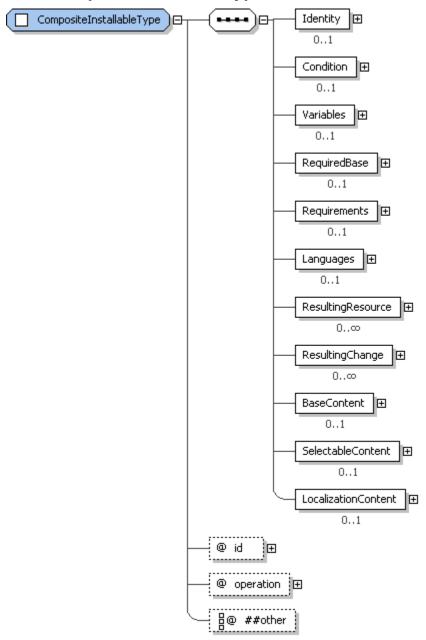


Figure 73: CompositeInstallableType structure.

2803 2804

2805

2806

2807 2808

2809

A *CompositeInstallable* supports the definition of metadata about package content for one deployment lifecycle operation. One *CompositeInstallable* can be defined for each operation supported by the software package. When more than one *CompositeInstallable* is defined in an SDD, there MUST NOT be more than one *CompositeInstallable* in scope for a particular deployment defined for any one operation.

4.9.1.1 CompositeInstallableType Property Summary

Name	Туре	*	Description
Identity	IdentityType	01	Human-understandable identity information about the CompositeInstallable.
Condition	ConditionType	01	A condition that determines if the content of the

			CompositeInstallable is relevant to a particular deployment.
Variables	VariablesType	01	Variables for use anywhere below the CompositeInstallable and in Topology.
RequiredBase	RequiredBaseType	01	Resource or resources that can be updated by the CompositeInstallable.
Requirements	RequirementsType	01	Requirements that must be met before successful application of the CompositeInstallable.
Languages	LanguageSelectionsType	01	Defines required and selectable languages and groups of languages.
ResultingResource	ResultingResourceType	0*	Resources that result from applying the CompositeInstallable.
ResultingChange	ResultingChangeType	0*	Configuration changes that result from applying the CompositeInstallable.
BaseContent	BaseContentType	01	Defines content describing the deployment of core resources.
SelectableContent	SelectableContentType	01	Defines content describing the deployment of selectable resources.
LocalizationContent	LocalizationContentType	01	Defines content whose sole purpose is to provide language support.
id	xsd:ID	1	A unique identifier for the CompositeInstallable element.
operation	OperationType	1	The deployment lifecycle operation described by the CompositeInstallable definition.
	xsd:anyAttribute	0*	

4.9.1.2 CompositeInstallableType Property Usage Notes

2810

2811

2812

2813

2814

2815

2823

2824

2825 2826

2827

2828 2829

2830

- **Identity**: This identity MAY have values in common with the identity of a resulting resource created when artifacts defined by content of the composite are processed.
 - If the unit of packaging described by the *CompositeInstallable* is known to a package management system, the *Identity* elements SHOULD correspond to values associated with that package in the package management system.
- 2816 See the *IdentityType* section for structure and additional usage details [3.4].
- Condition: When the condition defined in the CompositeInstallable is not met for a particular deployment, the CompositeUnit and all the content elements defined below the CompositeUnit are out of scope for that particular deployment.
- See the *ConditionType* section for structure and additional usage details [4.5.1].
- Variables: Variables defined here are visible throughout the *CompositeInstallable* and in *Topology*.
 See the *VariablesType* section for structure and additional usage details [4.6.3].
 - RequiredBase: When a resource or resources corresponding to the overall software will be modified during deployment, that resource or those resources MAY be defined in the RequiredBase element. The RequiredBase definition represents a requirement that the described resource be available for modification to apply the single operation defined by the CompositeInstallable. When RequiredBase is defined, the operation defined by CompositeInstallable MUST be one of the following: update, undo, uninstall, or repair. By specifying the required base separately from other requirements, it is possible for consumers of the SDD to easily determine if the base is available before processing other requirements.
 - See the RequiredBaseType section for structure and additional usage details [4.7.8].

- 2832 Requirements: These are requirements that must be met regardless of what content is selected for deployment and which conditions within the content hierarchy evaluates to true. 2833
- 2834 Requirements that apply only to a portion of the content SHOULD be defined at the point in the 2835 content hierarchy where they apply.
- 2836 All requirements specified on content elements that are in scope for a particular deployment MUST 2837 be met. This represents a logical "AND" of the requirements. Care should be taken by the SDD author 2838 to ensure that conflicting requirements cannot be in scope for the same deployment.
- 2839 See the RequirementsType section for structure and additional usage details [4.7.1].
- 2840 Languages: When the SDD contains language support, the Languages element can be defined to 2841 describe the languages supported; which languages are required and which are selectable; and how 2842 language selections are grouped.
- 2843 Languages defined in the Mandatory element under Languages are always in scope. Languages 2844 defined in the Optional element under Languages are in scope if selected by the deployer.
- 2845 The Languages element is used to declare the mandatory and optional language support available in 2846 the package. Languages whose support is deployed by LocalizationUnits in LocalizationContent 2847 MUST be defined as either a mandatory language or an optional language. In addition, languages 2848 whose support is deployed along with other content by InstallableUnits in BaseContent or SelectableContent SHOULD be defined as a mandatory language. 2849
- 2850 See the LanguageSelectionsType section for structure and additional usage details [4.13.4].
- 2851 ResultingResource: The software whose deployment is described by the SDD can be described in the CompositeInstallable's ResultingResource element. This software may consist of many resources 2852 2853 that are described in the ResultingResource elements of the InstallableUnits and/or LocalizationUnits 2854 defined within the CompositeInstallable.
- 2855 See the ResultingResourceType section for structure and additional usage details [4.8.1].
- 2856 ResultingChange: Configuration changes that result from deployment regardless of selected content or condition evaluation can be described in the CompositeInstallable's ResultingChange element. 2857
- Note that a ResultingChange is a change that is made to an existing resource. This is in contrast with ResultingResource, which describes newly created resources. 2859
- 2860 See the ResultingChangeType section for structure and additional usage details [4.8.2].
- 2861 BaseContent: The base content hierarchy defines content elements that are in scope by default. These content elements MAY be conditioned out based on characteristics of the deployment 2862 2863 environment, but are not optional from the deployer's perspective.
- 2864 See the BaseContentType section for structure and additional usage details [4.11.1].
- 2865 SelectableContent: Content that is selected by feature MUST be defined in the selectable content 2866 hierarchy. Groups and Features that select this content are also defined within SelectableContent. 2867 See the SelectableContentType section for structure and additional usage details [4.12.1].
- 2868 LocalizationContent: All LocalizationUnits and ContainedLocalizationPackages MUST be defined in 2869 the LocalizationContent hierarchy. Each LocalizationUnit contains information about the languages it supports and the resources it localizes. This information is evaluated to determine if the 2870 2871 LocalizationUnit is in scope for a particular deployment.
- 2872 Each LocalizationUnit and ContainedLocalizationPackage defined in LocalizationContent MAY 2873 support any combination of Mandatory and Optional languages and can localize any combination of base and selectable resources, as well as resources already deployed. 2874
- 2875 Some language support may be deployed incidentally by artifacts in an InstallableUnit along with deployment of other solution content. LocalizationContent holds only content elements whose sole 2876 2877 purpose is to provide language support.
- 2878 LocalizationContent supports advanced management of language support, including definition of 2879 mandatory and optional languages and support of localization materials with a lifecycle that is 2880 somewhat independent of the resources localized. When an SDD author has no need for advanced

- management of language support, all language support MAY be delivered with other content in InstallableUnits.
- See the LocalizationContentType section for structure and additional usage details [4.13.1].
- **id**: The *id* attribute may be useful to software that processes the SDD, for example, for use in creating log and trace messages.
 - **operation**: This is the *operation* that may be applied to the SDD package whose metadata is described by the *CompositeInstallable*.
 - See the *OperationType* section for enumeration values and their meaning [4.3.7].

4.9.2 CompositeUnitType

2886

2887

2888

2889

2890 2891

2892

2893

2894

2895

2896

2897

2898

2899 2900

2901

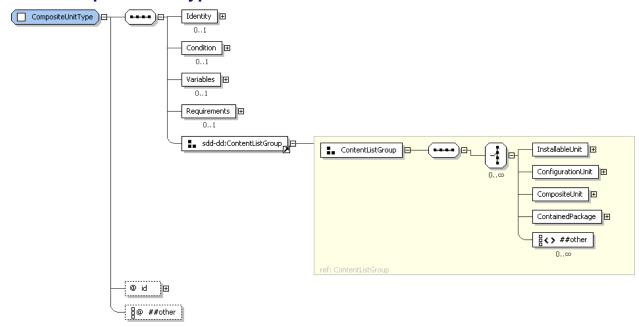


Figure 74: CompositeUnitType structure.

The *CompositeUnit* element is used to organize content elements within the base or selectable content hierarchies. It can define any number of *InstallableUnits*, *ConfigurationUnits*, *ContainedPackages* and other *CompositeUnits*. Composite units assist in organizing the deployment package. A composite unit can provide a convenient way to specify variables, requirements, conditions and other information that applies to every content element defined below the composite unit. Within the selectable content hierarchy, composite units can be used to group content elements that are selected by feature sets or groups. When a feature containing a composite unit is selected, all its child content elements are selected by association. Organization of content within a composite unit does not imply any relationships among the resources that result from deployment of the composite content.

4.9.2.1 CompositeUnitType Property Summary

Name	Туре	*	Description
Identity	IdentityType	01	Human-understandable identity information about the CompositeUnit.
Condition	ConditionType	01	A condition that determines if the CompositeUnit and its child content elements are relevant to a particular deployment.
Variables	VariablesType	01	Variables for use within the CompositeUnit's and its child content elements' requirement and artifact definitions.

Requirements	RequirementsType	01	Requirements that must be met prior to successful processing of any of the CompositeUnit's content.
InstallableUnit	InstallableUnitType	0*	An InstallableUnit that is part of the composite content.
ConfigurationUnit	ConfigurationUnitType	0*	A ConfigurationUnit that is part of the composite content.
CompositeUnit	CompositeUnitType	0*	A CompositeUnit that organizes a subset of the composite's content.
ContainedPackage	ReferencedPackageType	0*	A ContainedPackage that is part of the composite content.
	xsd:any	0*	
id	xsd:ID	1	An identifier for the CompositeUnit scoped to the deployment descriptor.
	xsd:anyAttribute	0*	

4.9.2.2 CompositeUnitType Property Usage Notes

2902

2905

- Identity: This identity MAY have values in common with the identity of a resulting resource created when artifacts defined by content of the composite are processed.
 - If the unit of packaging described by the *CompositeUnit* is known to a package management system, some of the identity elements MAY correspond to values associated with that package in the package management system.
- See the *IdentityType* section for structure and additional usage details [3.4].
- **Condition**: When the condition defined in the *CompositeInstallable* is not met for a particular deployment, the *CompositeUnit* and all the content elements defined below the *CompositeUnit* are out of scope for that particular deployment.
- 2912 See the *ConditionType* section for structure and additional usage details [4.5.1].
- **Variables**: Variables defined here are visible within the *CompositeUnit* and every content element defined below the *CompositeUnit*.
- These variables are in scope for a particular deployment only if the *CompositeUnit* is in scope for that deployment.
- See the *VariablesType* section for structure and additional usage details [4.6.3].
- 2918 **Requirements**: These are requirements that must be met before any of the artifacts in the CompositeUnit hierarchy can be processed.
- These requirements are in scope for a particular deployment only if the *CompositeUnit* is in scope for that deployment.
- The *operation* defined for a *Requirement* defined in a *CompositeUnit* MUST be the same as the operation defined by the *CompositeInstallable* containing the *CompositeUnit*.
- See the *RequirementsType* section for structure and additional usage details [4.7.1].
- InstallableUnit: See the InstallableUnitType section for structure and additional usage details [4.3.1].
- **ConfigurationUnit**: See the *ConfigurationUnitType* section for structure and additional usage details [4.3.2].
- 2928 CompositeUnit: A CompositeUnit element MAY contain child CompositeUnits.
- **ContainedPackage**: See the *ReferencedPackageType* section for structure and additional usage details [4.10.1].
- **id**: The *id* attribute may be useful to software that processes the SDD, for example, for use in creating log and trace messages.

4.10 Aggregation

SDD packages can aggregate other SDD packages. Metadata about the aggregation is defined in ContainedPackage, ContainedLocalizationPackage and Requisite elements. ContainedPackage elements are content elements that can be defined anywhere in the base and selectable content hierarchies. ContainedLocalizationPackages are content elements that can be defined in the localization content hierarchy. Requisites are packages that can be deployed, if necessary, to satisfy requirements in the aggregating SDD. They are not content of the SDD package. The type of all three of these elements is ReferencedPackageType. The term referenced package is used in this specification when referring to these elements as a group. The term referenced SDD is used when referring to any aggregated SDD.

When an SDD aggregates other SDDs, the package descriptors of the aggregated SDDs are included in the *Contents* list in the package descriptor of the aggregating SDD (see Figure 75). The referenced package elements in the deployment descriptor identify a referenced SDD package by referencing its package descriptor definition in *Contents*. Each referenced package element can further constrain the deployment of the referenced SDD by defining additional requirements; by mapping resources defined in the aggregating SDD to those defined in the referenced SDD; and by determining feature selections for deployment of the referenced SDD.

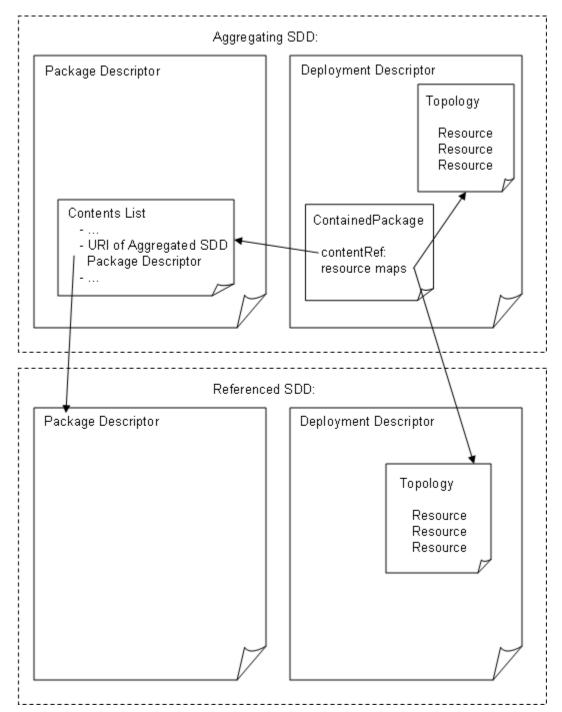


Figure 75: The aggregating SDD identifies the package descriptor of the aggregated SDD and maps resource definitions in the aggregating SDD to resource definitions in the aggregated SDD.

Referenced packages can create and modify software resources that may be required by the aggregating SDD or other SDDs in the aggregation. These resources are mapped to the associated resource definitions in the aggregating SDD by using the *ResultingResourceMap*, the *ResultingChangeMap* and the *RequiredResourceMap* elements of a referenced package element. The characteristics of these resources that other SDDs in the aggregation depend on in some way MUST be exposed in the *ResultingResourceMap*, the *ResultingChangeMap* and the *RequiredResourceMap* elements of the aggregating SDD (see Figure 76). These exposed characteristics are mapped to requirements, conditions

2965 2966

2967

2963

and resource variables in the SDDs to determine if requirements are satisfied, conditions are met and to set the values of resource property variables (see Figure 77).

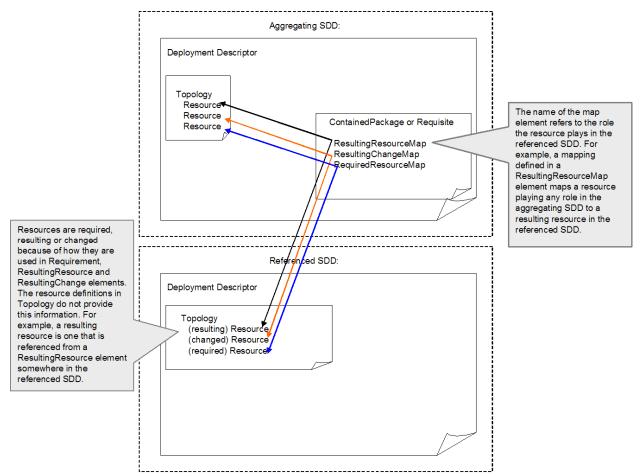


Figure 76: The list of resource maps is segmented by the role the resource plays in the referenced SDD.

2971

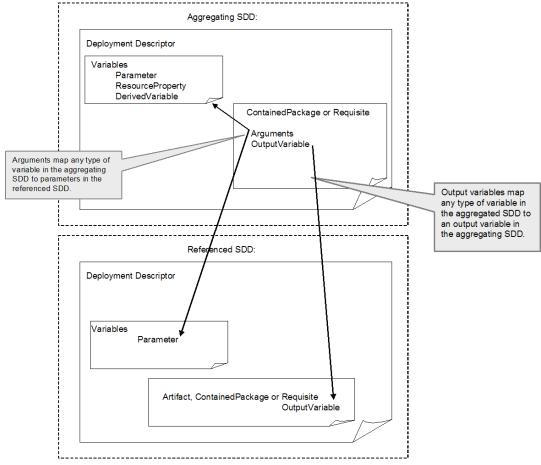


Figure 77: Arguments and OutputVariables of ReferencedPackageType map variables in the aggregating SDD to variables in the referenced SDD.

2972 4.10.1 ReferencedPackageType

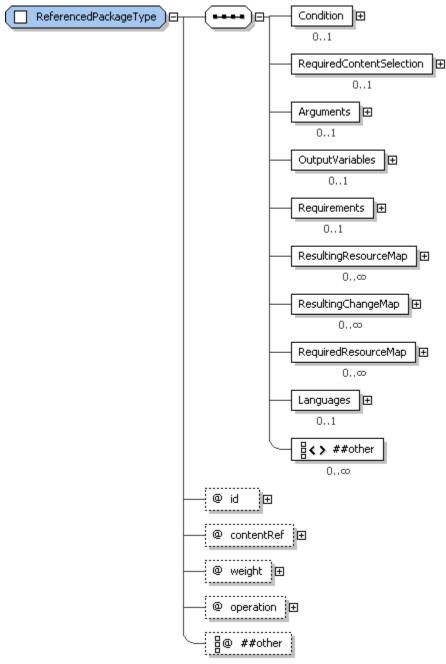


Figure 78: ReferencedPackageType structure.

2973 2974

2975

2976

2977

2978 2979

2980

A referenced package identifies an aggregated SDD and describes the conditions of its aggregation. ReferencedPackageType provides the type definition for ContainedPackage and Requisite elements. ContainedPackage elements identify an SDD package that is treated like a content element of the defining SDD. Requisite elements identify an SDD package that can be deployed, if necessary, to satisfy resource constraints.

4.10.1.1 ReferencedPackageType Property Summary

Name	Туре	*	Description
Condition	ConditionType	01	A condition that determines if the referenced package

			is relevant to a particular deployment.
RequiredContentSelection	ContentSelection RequiredContentSelectionType		A list of groups and features that MUST be selected when the referenced package is deployed.
Arguments	ArgumentListType	01	Inputs to the reference package.
OutputVariables	OutputVariableListType	01	Outputs from the referenced package.
Requirements	RequirementsType	01	Additional requirements for deploying the referenced package as part of the aggregation.
ResultingResourceMap	ResultingResourceMapType	0*	Maps resulting resources in the referenced package to resources in the referencing package and exposes properties of the resulting resource.
ResultingChangeMap	ResultingChangeMapType	0*	Maps changed resources defined in the referenced package to resources in the referencing package and exposes changed properties of the resource.
RequiredResourceMap	ResourceMapType	0*	Maps required resources in the referenced package to resources in the referencing package.
Languages	LanguagesType	01	Languages supported by the referenced package.
	xsd:any	0*	
id	xsd:ID	1	Identifier for the referenced package element that is unique within the deployment descriptor.
contentRef	xsd:token		Reference to the identifier of the package Content defined in the package descriptor which identifies the package descriptor of the referenced package.
weight	xsd:positiveInteger	01	The time required to process the referenced package relative to all artifacts and other referenced packages in the SDD.
operation	OperationType	01	Specifies which operation in the referenced SDD is performed.
	xsd:anyAttribute	0*	

4.10.1.2 ReferencedPackageType Property Usage Notes

- **Condition**: A *Condition* is used when the *ReferencedPackage's* content should only be deployed when certain conditions exist in the deployment environment.
 - See the ConditionType section for structure and additional usage details [4.5.1].
- **RequiredContentSelection**: Certain *Groups* or *Features* may need to be selected when deploying the referenced package. These can be identified in the *RequiredContentSelection* element.
 - If one particular aggregated SDD requires the selection of different groups or features, depending on other choices made during a particular deployment, different *Requisite* or *ContainedPackage* elements can be defined in a way that will cause the correct combination of *Groups* and *Features* to be used in each situation.
 - See the RequiredContentSelectionType section for structure and additional usage details [4.12.13].
- Arguments: Arguments are used to provide values for input variables defined in the deployment descriptor of the referenced package. The argument name specified MUST reference the *id* of a parameter in the referenced package.

2981

2982

2983

2984

2985

29862987

2988 2989

2990

2991

2992

2993

2994

2995 See the *ArgumentListType* section for structure and additional usage details [4.3.8].

3002

3016

3017

3018

3019

3020

3021

3022

3023

3024

3025

3026

3027

3028

3029

3030

3031

3032 3033

3034

3043

3044

3045

- OutputVariables: The output variable mapping can be used to set variables to outputs created by processing the referenced SDD. The output variables in the referenced package are mapped to output variables in the aggregating SDD.
- Each output variable value specified MUST reference the *id* of an output variable in the referenced package. This can be an output variable from an artifact or an output variable from a referenced package defined within the referenced SDD.
 - See the OutputVariableListType section for structure and additional usage details [4.3.10].
- Requirements: When the aggregating SDD has stricter requirements for the use of the referenced SDD than are defined by the referenced SDD itself, those requirements can be defined in Requirements. This is not intended to repeat requirements expressed in the referenced SDD, but rather to add additional stricter requirements.
- Requirements expressed in the referenced SDD need to be satisfied, in addition to the requirements expressed in the *Requisite* or *ContainedPackage* element of the aggregating SDD.
- Requirements expressed in the aggregating SDD MUST NOT conflict with requirements expressed in the referenced SDD. The requirements specified MUST further constrain the referenced package.
- 3011 See the *RequirementsType* section for structure and additional usage details [4.7.1].
- ResultingResourceMap: Resources created by the referenced package may be resources that are defined in the aggregating SDD. The ResultingResourceMap is used to identify the correspondence between resource definitions in the aggregating SDD and resulting resource definitions in the aggregated SDD.
 - Characteristics of the resulting resources MAY be exposed in the *ResultingResourceMap* element. *ResourceConstraints* defined on those resources anywhere in the aggregation are mapped to the resource properties exposed in the resulting maps of the referenced package to determine if the referenced package will satisfy the constraints. Each individual constraint is considered met by the referenced package if a property exposed in the resulting resource map that is in scope for the particular deployment satisfies the constraint.
 - For example, a property constraint in a ResourceConstraint element states that the property named "FileAttributes" has the value "Writeable". The resourceRef in the ResourceConstraint identifies a resource defined in Topology that is also identified in the ResultingResourceMap of a Requisite or ContainedPackage element that is in scope for the particular deployment. If the ResultingResourceMap element contains a statement that the property named "FileAttributes" has the value "Writeable", then the ResourceConstraint is met when the Requisite or ContainedPackage is deployed.
 - This same logic applies to *ResourceConstraints* in aggregated packages. If the SDD in the preceding example also aggregates another SDD and maps the same resource to a required resource in that aggregated SDD, then all *ResourceConstraints* in the aggregated SDD are met only if the *ResultingResourceMap* of the referenced SDD that creates that resource contains a *Name*, *Version* or *Property* definition that satisfies the constraint.
 - See the ResultingResourceMapType section for structure and additional usage details [4.10.3].
- ResultingChangeMap: Resources configured by the referenced package may be resources that are defined in the aggregating SDD. The ResultingChangeMap is used to identify the correspondence between resource definitions in the aggregating SDD and changed resources defined in ResultingChange elements of the aggregated SDD.
- Characteristics of resources that are changed by the referenced SDD MAY be exposed in the ResultingChangeMap. These are correlated with ResourceConstraints on the changed resource in the same manner as the exposed characteristics of a resulting resource. See the property usage notes for ResultingResourceMap above.
 - See the ResultingChangeMapType section for structure and additional usage details [4.10.4].
 - **RequiredResourceMap**: When a resource required by the aggregated SDD is a resource also defined in the aggregating SDD, the *RequiredResourceMap* is used to identify the correspondence.

This element is a simple mapping of a resource in one SDD to a resource in another. There is no need to expose characteristics of the resource because it is not created or modified by the referenced package.

One resource MAY be required, resulting, changed, all three or any combination of these within one SDD. When a resource in the referenced SDD plays more than one role, the mapping MUST be repeated everywhere it applies. This allows exposure of all the created or modified properties in the *ResultingChangeMap* and *ResultingResourceMap*. In this situation—when one resource in the referenced SDD plays more than one of the roles identified earlier (required, resulting or changed)—all mappings MUST be to the same resource in the aggregating SDD. Only the exposed resulting and changed properties differ.

See the ResourceMapType section for structure and additional usage details [4.10.2].

- Languages: Languages supported by the referenced package MAY be identified here. This list does not identify mandatory versus optional languages; it is for informational purposes only. The SDD author is not limiting use of the referenced package to deployments where all in-scope languages are found in this list. There may be cases where aggregated packages are deployed even though they cannot support all of the languages supported by the aggregation as a whole.
- Each language specified MUST match a language in the referenced package.
- 3063 See the *LanguagesType* section for structure and additional usage details [4.13.6].
- **id**: The *id* attribute may be useful to software that processes the SDD, for example, for use in creating log and trace messages.
 - contentRef: The package descriptor of an SDD that aggregates other SDDs, either through ContainedPackage elements or Requisite elements, will list the package descriptor files of the aggregated SDDs in its content list. The contentRef attribute of a referenced package element MUST be a reference to the id of a Content element in the aggregating SDD's package descriptor that defines the aggregated package descriptor.
 - weight: Defining weights for all artifacts and referenced packages in an SDD provides useful information to software that manages deployment. The weight of the referenced package refers to the relative time taken to deploy the referenced package with respect to other packages in this SDD.

For example, if the referenced package takes twice as long to deploy as a particular install artifact whose weight is "4", then the weight of the referenced package would be "8". The weight numbers have no meaning in isolation and do not describe actual time elapsed. They simply provide an estimate of relative time.

 operation: The referenced SDD may support more than one deployment lifecycle operation. The operation attribute MUST include the operations that are applicable when this is the case.

See the OperationType section for enumeration values and their meaning [4.3.7].

4.10.2 ResourceMapType

3049 3050

3051

3052

3053

3054 3055

3056

3057

3058

3059

3060

3061

3062

3066

3067

3068 3069

3070 3071

3072

3073

3074

3075

3076 3077

3078

3079

3080

3081

3082 3083

3084

3085

3086 3087

3088

3089 3090




Figure 79: ResourceMapType structure.

ResourceMapType is used in the definition of elements that map resources in an SDD to resources in a referenced SDD. The purpose of a resource map is to identify when two resources in separate SDDs MUST resolve to the same resource instance during any particular deployment. The characteristics of a mapped resource that are defined in the topology sections of the two SDDs MUST NOT conflict.

For example, if a *Name* is defined for the resource in both topologies, it MUST be the same in both definitions and if a *Property* definition is included for the same property in both places, the value MUST be the same.

- Additional characteristics of a mapped resource may be constrained by *Requirements* or *Conditions* in either SDD. All constraints on a mapped resource that are in scope for a particular deployment MUST NOT conflict.
- Resources that are not mapped between the two SDDs MAY resolve to the same instance when their characteristics defined in topology do not conflict and when the constraints in scope for any particular deployment do not conflict.
- The RequiredResourceMap, ResultingResourceMap and ResultingChangeMap elements all use ResourceMapType, either directly or as a base type that is extended.

4.10.2.1 ResourceMapType Property Summary

3099

3100

3101

3102

3103

3104

3105

3107 3108

3109

3110

3111

3112

Name	Туре	*	Description
resourceRef	xsd:IDREF	1	Reference to a resource defined in the deployment descriptor.
foreignID	xsd:NCName	01	Reference to a resource defined in a referenced deployment descriptor.
	xsd:anyAttribute	0*	

4.10.2.2 ResourceMapType Property Usage Notes

- resourceRef: The value of the resourceRef MUST be set to the id of the resource in the SDD to be mapped to a resource in a referenced SDD.
- **foreignID**: The value MUST reference the *id* of a resource in the referenced package. This is the resource in the referenced SDD that MUST resolve to the same resource instance as the resource identified in *resourceRef*.

3106 4.10.3 ResultingResourceMapType

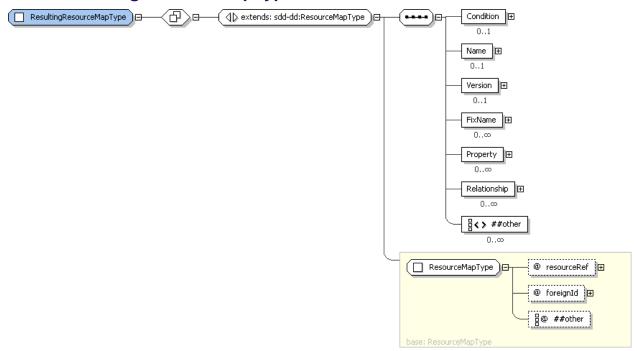


Figure 80: ResultingResourceMapType structure.

ResultingResourceMapType defines an element type that maps resources that result from deployment of the referenced SDD to a resource in the referencing SDD. In addition to identifying the two resources that MUST resolve to the same resource instance, the resulting resource map allows characteristics of the resulting resource to be exposed. There may be constraints defined on the mapped resource in the

referencing SDD or any referenced SDD in the hierarchy of SDDs. These constraints can be evaluated by comparing the constraint to the exposed characteristics defined in the resulting resource map. The resulting resource map MUST expose sufficient characteristics of the resulting resource to support successful evaluation of constraints on that resource.

For example, say that the SDD defines a resource with id="Database" in its topology. The solution can work with Database Product A or Database Product B. Database Product A is created by a referenced SDD defined in a *Requisites* element. The SDD will contain *Requirements* and/or *Conditions* that have alternatives for each of the database products. All constraints on the Database resource that apply to Database Product A must be satisfied by a resource characteristic exposed in the *ResultingResourceMap* element of the *Requisite* element that points to the SDD that deploys Database Product A.

4.10.3.1 ResultingResourceMapType Property Summary

Name	Туре	*	Description
	[extends] ResourceMapType		See the ResourceMapType section for additional properties [4.10.2].
Condition	Condition ConditionType		A condition that determines if the resulting resource definition is relevant to a particular deployment.
Name	VariableExpressionType	01	The name of the resource created or updated by the referenced SDD.
Version	VersionType	01	The version of the resource created or updated by the referenced SDD.
FixName	xsd:string	0*	Names of fixes to the mapped resource that are created by the referenced SDD.
Property	ResultingPropertyType	0*	Properties set when the mapped resource is created or updated by the referenced SDD.
Relationship	RelationshipType	0*	Relationship that will exist after creating or updating the resource.
	xsd:any	0*	

4.10.3.2 ResultingResourceMapType Property Usage Notes

See the ResourceMapType section for details of the inherited attributes and elements [4.10.2].

- Condition: A Condition is used when the resulting resource will be created by the referenced package only when certain conditions exist in the deployment environment.
 - See the ConditionType section for structure and additional usage details [4.5.1].
- Name: The Name of the resulting resource created or updated by the referenced SDD MUST be defined if it is not defined elsewhere and there are constraints on this resource that contain a Name element. "Defined elsewhere" means defined in the topology of the referencing SDD or in the topology of any other referenced SDD for a resource that is also mapped to the same resource. "Constraints on this resource" means a constraint that applies to the particular instantiation of the resource that is created or updated by the referenced SDD, for example a constraint that needs to successfully map to the referenced SDD for the referenced SDD to be used in a particular deployment.
 - See the VariableExpressionType section for structure and additional usage details [4.6.1].
- Version: The Version of the resulting resource created or updated by the referenced SDD MUST be defined if it is not defined elsewhere and there are version constraints defined on this resource. (See the usage note for Name above for a definition of "defined elsewhere".)
- 3142 See the *VersionType* section for structure and additional usage details [3.10].
 - **FixName**: One or more names of fixes to the resulting resource created or updated by the referenced SDD MUST be defined if they are not defined elsewhere and there are version constraints defined on

- this resource that include fix names. (See the usage note for *Name* above for a definition of "defined elsewhere".)
- Property: A *Property* of the resulting resource created or updated by the referenced SDD MUST be defined if it is not defined elsewhere and there are property constraints on this property. (See the usage note for *Name* above for a definition of "defined elsewhere".)
- 3150 See the ResultingPropertyType section for structure and additional usage details [4.2.4].
- Relationship: Any number of *Relationship* elements can be included to identify relationships that will exist after applying the referenced package.
- 3153 See the *RelationshipType* section for structure and additional usage details [4.8.3].

3154 **4.10.4 ResultingChangeMapType**

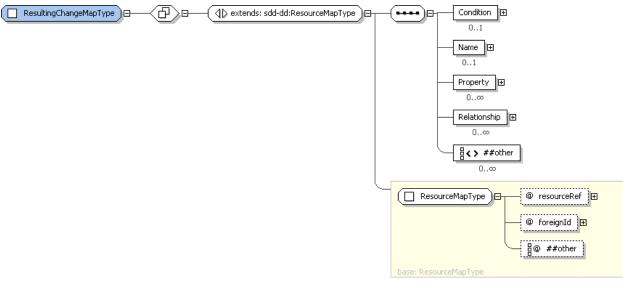


Figure 81: ResultingChangeMapType structure.

3155

3156

3157

3158

3159

3160

3161 3162

3163

3164

3165 3166

3167

3168 3169

3170

3171

ResultingChangeMapType is very similar to ResultingResourceMapType. It defines an element type that maps resources that are changed by deployment of the referenced SDD to a resource in the referencing SDD. In addition to identifying the two resources that MUST resolve to the same resource instance, the resulting change map allows characteristics of the modified resource to be exposed. There may be constraints defined on the mapped resource in the referencing SDD or any referenced SDD in the hierarchy of SDDs. These constraints can be evaluated by comparing the constraint to the exposed characteristics defined in the resulting change map. The resulting change map MUST expose sufficient characteristics of the resulting change to support successful evaluation of constraints on that resource.

For example, say that the SDD defines a resource with id="OS" in its topology. The solution can work with Windows or Linux. Linux is configured by a referenced SDD defined in a *Requisites* element. The SDD will contain *Requirements* and/or *Conditions* that have alternatives for Windows and for Linux. All constraints on the modified characteristics of Linux must be satisfied by a resource characteristic exposed in the *ResultingChangeMap* element of the *Requisite* element that points to the SDD that configures Linux.

4.10.4.1 ResultingChangeMapType Property Summary

Name	Туре	Type * Description	
	[extends] ResourceMapType		See the ResourceMapType section for additional properties [4.10.2].
Condition	ConditionType	01	A condition that determines if the resulting change definition is relevant to a particular deployment.

Name	VariableExpressionType	01	The name of the modified resource.
Property	ResultingPropertyType	0*	A modified property of the resource.
Relationship	ionship RelationshipType		Relationship that will exist after the change is applied to the resource.
	xsd:any	0*	

4.10.4.2 ResultingChangeMapType Property Usage Notes

See the ResourceMapType section for details of the inherited attributes and elements [4.10.2].

- **Condition**: A *Condition* is used when the resource mapped from the external package will be changed only when certain conditions exist in the deployment environment.
 - See the ConditionType section for structure and additional usage details [4.5.1].
- Name: The Name of the resource that is modified by the referenced SDD is defined here to assist with identifying the resource instance that is changed. It is not an indication that the resource name itself is modified by the referenced SDD. If resource characteristics defined in the topology of any SDD defining a resource mapped to the changed resource are sufficient to identify the resource, then Name SHOULD NOT be defined in the ResultingChangeMap.
- See the VariableExpressionType section for structure and additional usage details [4.6.1].
- Property: A modified property MUST be exposed in a ResultingChangeMap if it is not defined elsewhere and there are property constraints on the modified property. "Defined elsewhere" means defined in the topology of the referencing SDD or in the topology of any other referenced SDD for a resource that is also mapped to the same resource. "Constraints on the modified property" means a property constraint that applies to the particular instantiation of the resource that is modified by the referenced SDD, for example a constraint that needs to successfully map to the referenced SDD for the referenced SDD to be used in a particular deployment.
 - See the ResultingPropertyType section for structure and additional usage details [4.2.4].
- Relationship: Relationship elements SHOULD be included to identify relationships that will exist after the application of the referenced package.
- Relationships that need to be known by the aggregate MUST be mapped. Relationships need to be known when they are referred to in one or more resource constraints.
- 3195 See the *RelationshipType* section for structure and additional usage details [4.8.3].

3196 **4.10.5 RequisitesType**

3172

3173

3174

3175

3176

3177

3178

3179

3180

3181 3182

3183

3184

3185

3186

3187 3188

3189

3190

3197 3198

3199

3200

3201

3204



Figure 82: RequisitesType structure.

The *Requisites* element contains a list of references to SDD packages that can be used to satisfy one or more of the requirements defined by content elements. The definition of a requisite does not imply that it must be used; only that it is available for use if needed.

Requisite definitions can map values and resources defined in the SDD to inputs and resources defined in the requisite SDD.

4.10.5.1 RequisitesType Property Summary

Name	Туре	*	Description
ReferencedPackage	ReferencedPackageType	1*	An SDD package that can, but is not required to, be deployed to satisfy a requirement.

4.10.5.2 RequisitesType Property Usage Notes

 ReferencedPackage: See the ReferencedPackageType section for structure and additional usage details [4.10.1].

4.11 Base Content

3205 3206

3207

3208

3213

3214

3215

3216

3217 3218

3220

3225


3226

3209 Base content is the default content for the deployment lifecycle operation associated with the
3210 *CompositeInstallable* that contains the base content. This is content that is deployed whenever the
3211 associated operation is performed on the SDD package. Base content may be conditioned on
3212 characteristics of the deployment environment but it is not selectable by the deployer.

Resources associated with base content for one operation may be different from resources associated with base content for a different operation in the same SDD package.

For example, base content in the *CompositeInstallable* for the configuration operation may configure resources that were created by selectable content in the *CompositeInstallable* for the install operation. In this example, the configuration is in base content because it must be done if the resource exists. It is not selectable by the deployer during the configuration operation.

3219 **4.11.1 BaseContentType**

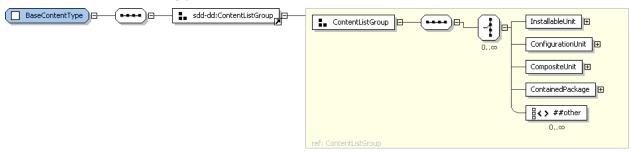

3221 Figure 83: BaseContentType structure.

The *BaseContent* hierarchy defines the default content for the deployment operation described by the *CompositeInstallable*. This content MAY be conditioned.

3224 **4.11.1.1 BaseContentType Property Summary**

Name	Туре	*	Description
InstallableUnit	InstallableUnitType	0*	An InstallableUnit that defines base content.
ConfigurationUnit	ConfigurationUnitType	0*	A ConfigurationUnit that defines base configuration content.
CompositeUnit	CompositeUnitType	0*	A CompositeUnit that organizes base content.
ContainedPackage	ReferencedPackageType	0*	An SDD whose content is considered to be base content in the context of this aggregation.
	xsd:any	0*	

4.11.1.2 BaseContentType Property Usage Notes

- InstallableUnit: See the InstallableUnitType section for structure and additional usage details [4.3.1].
- **ConfigurationUnit**: See the *ConfigurationUnitType* section for structure and additional usage details [4.3.2].
- **CompositeUnit**: See the *CompositeUnitType* section for structure and additional usage details [4.9.2].

 ContainedPackage: See the ReferencedPackageType section for structure and additional usage details [4.10.1].

4.12 Content Selectability

3231

3232

3233 3234

3235

3236

3237

3238 3239

3240

3241

3242

3243 3244

3245

3246

3248 3249

3250

The SDD author MAY define selectable subsets of content using *Groups* and *Features*. Selectability, as used in the SDD, is a characteristic of the deployment lifecycle operation and the package. The decision to provide selectability for one operation in one package has no semantic relationship to the selectability provided in another package related to the same software. It also has no semantic relationship to the selectability provided for a different operation within the same package.

For example, when the SDD author chooses to create a feature in a maintenance package, that feature is designed to allow selectable application of the maintenance, not to reflect the original set of features for the base content.

4.12.1 SelectableContentType

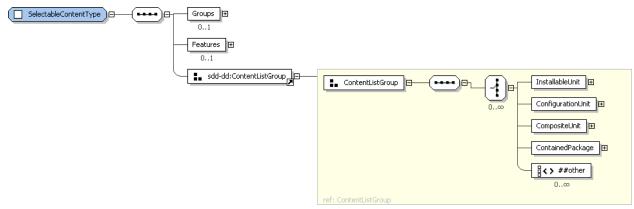


Figure 84: SelectableContentType structure.

Content elements defined here make up the selectable content hierarchy. These elements are selected via *Groups* and *Features* also defined under *SelectableContent*.

3247 4.12.1.1 SelectableContentType Property Summary

Name	Туре	*	Description
Groups	GroupsType	01	Groups of features that can be selected as a unit.
Features	FeaturesType	01	A definition of user-selectable content.
InstallableUnit	InstallableUnitType	0*	An InstallableUnit that defines selectable content.
ConfigurationUnit	ConfigurationUnitType	0*	A ConfigurationUnit that defines selectable configuration.
CompositeUnit	CompositeUnitType	0*	A CompositeUnit that organizes content elements that define selectable content.
ContainedPackage	edPackage ReferencedPackageType		An SDD package whose content is selectable in the context of the aggregating SDD.
	xsd:any	0*	

4.12.1.2 SelectableContentType Property Usage Notes

Groups: Groups can be used by the SDD author to define a convenient way for deployers to select a
group of features.

- 3251 "Typical" and "Custom" are examples of groups that are commonly presented in installation interfaces.
- 3253 See the *GroupsType* section for structure and additional usage details [4.12.2].
- Features: Features can be used to organize optional functionality into meaningful selections.

 Features should be meaningful from the deployer's point of view.
- 3256 See the *FeaturesType* section for structure and additional usage details [4.12.4].
- 3257 InstallableUnit: See the InstallableUnitType section for structure and additional usage details [4.3.1].
- **ConfigurationUnit**: See the *ConfigurationUnitType* section for structure and additional usage details [4.3.2].
- **CompositeUnit**: See the *CompositeUnitType* section for structure and additional usage details [4.9.2].
- **ContainedPackage**: See the *ReferencedPackageType* section for structure and additional usage details [4.10.1].

3264 **4.12.2 GroupsType**

3265

3270

3271

3272


3273

3274

3275 3276

3277

3278



- 3266 Figure 85: Groups structure.
- 3267 Groups Type is used in Selectable Content to provide a list of one or more Group elements.

3268 4.12.2.1 GroupsType Property Summary

Name	Туре	*	Description	
Group	GroupType	1*	A group of features that can be selected together.	

3269 **4.12.2.2 GroupsType Property Usage Notes**

• **Group**: Associating features in a *Group* is based on the characteristics of the package and the ways in which the SDD author chooses to expose function variability to the deployer.

One example is a "Typical" group that allows easy selection of the most common grouping of features, along with a "Custom" group that allows an advanced user to select from among all features. Another example is a "Client" group that selects features that deploy the client software for an application, along with a "Server" group that selects features that deploy the server software for the same application.

If alternative sets of selections are desired, Groups MUST be used to define these sets. Zero or one set can be selected for any particular deployment

3279 See the *GroupType* section for structure and additional usage details [4.12.3].

3280 **4.12.3 GroupType**

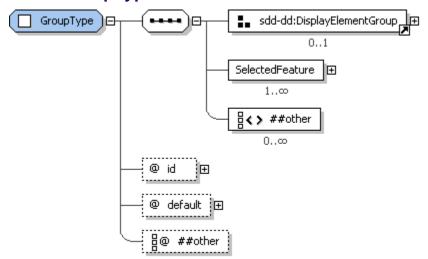


Figure 86: GroupType structure.

3281 3282

3283

3284

3285

3286 3287

3288

3289

3290

3291 3292

3293

3294

3295

3296

GroupType provides the type definition for each *Group* element in *SelectableContent's* list of *Groups*. For a particular deployment, zero or one groups may be selected by the deployer.

4.12.3.1 GroupType Property Summary

Name	Туре	*	Description
DisplayName	layName DisplayTextType		A human-readable name for the group.
Description	DisplayTextType	01	A human-readable description of the group.
ShortDescription	DisplayTextType	01	A human-readable short description of the group.
SelectedFeature	FeatureReferenceType	1*	A feature that is part of the group.
	xsd:any	0*	
id	d xsd:ID		An identifier of the group that is unique within the descriptor.
default	xsd:boolean	01	Indicates that the group is selected by default when no selections are provided by the deployer. **default value="false"
	xsd:anyAttribute	0*	

4.12.3.2 GroupType Property Usage Notes

- DisplayName: This element MAY be used to provide human-understandable information. If used, it MUST provide a label for the group.
 - See the DisplayElementGroup section for structure and additional usage details [4.14.2].
- **Description, ShortDescription**: These elements MAY be used to provide human-understandable information. If used, they MUST provide a description of the group.
- The Description element MUST be defined if the ShortDescription element is defined.
 - See the DisplayElementGroup section for structure and additional usage details [4.14.2].
- **SelectedFeature**: Each *SelectedFeature* is considered selected if inputs identify the group as selected.
 - Selection of a nested feature causes its parent feature to be selected.

- 3297 See the FeatureReferenceType section for structure and additional usage details [4.12.8].
- 3298 **id**: The group's *id* may be used to refer to the group when aggregating the SDD into another SDD.
- The *id* attribute may be useful to software that processes the SDD, for example, for use in creating log and trace messages.
- **default**: Multiple default *Groups* MUST NOT be defined.

4.12.4 FeaturesType

3302

3303 3304

3305

3306

3307

3308

3309

3311

3312




Figure 87: FeaturesType structure.

Features Type provides the type definition for the single, optional, Features element in SelectableContent. Features defined directly under the Features element in SelectableContent are the top level features. A Features element may also include a MultiSelect element that refers to features whose selections are interdependent.

4.12.4.1 FeaturesType Property Summary

Name	Туре	*	Description
Feature	FeatureType	1*	A top level feature in the hierarchy of features defined in SelectableContent.
MultiSelect	MultiSelectType	0*	A list of feature references whose selection is controlled as a multi-select list with defined minimum and maximum selections.
	xsd:any	0*	

3310 4.12.4.2 FeaturesType Property Usage Notes

- **Feature**: Each top level *Feature* can define *NestedFeatures*. All features can define required relationships with other features that cause the required feature to be selected.
- 3313 See the *FeatureType* section for structure and additional usage details [4.12.5].
- 3314 MultiSelect: The MultiSelect element MUST refer to Feature or NestedFeature elements.
- 3315 See the *MultiSelectType* section for structure and additional usage details [4.12.15].

4.12.5 FeatureType

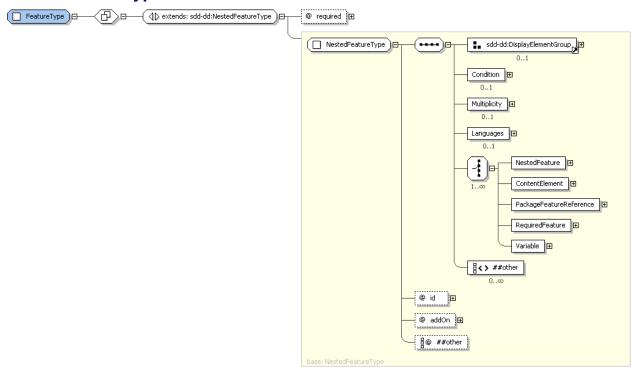


Figure 88: FeatureType structure.

3317 3318

3319 3320

3321 3322

3323

3325

3326

3327 3328

3329

3330

Feature Type provides the type definition for each feature defined directly below Selectable Content. A Feature can define Nested Features and identify Content Elements and other features that will be selected when the feature is selected. A feature can also be defined to be available for selection only under certain conditions.

4.12.5.1 FeatureType Property Summary

Name	Туре	*	Description	
	[extends] NestedFeatureType		See the NestedFeatureType section for additional properties [4.12.6].	
required	xsd:boolean	01	Indicates the feature must be selected. **default value="false"	

3324 4.12.5.2 FeatureType Property Usage Notes

- See the NestedFeatureType section for details of the inherited attributes and elements [4.12.6].
- **required**: A top level *Feature* MUST be selected when the value of the *required* attribute is "true". In this case, the user cannot choose to deselect this top level *Feature*.
 - In *Features* that define *Multiplicity*, the SDD author can state a minimum number of instances of the *Feature*. This minimum applies only if the *Feature* is selected. The *required* attribute can be used to indicate that the *Feature* is always selected and so the minimum number of instances applies.
- 3331 The required attribute SHOULD be used only when Multiplicity is applied to the Feature.

3332 4.12.6 NestedFeatureType

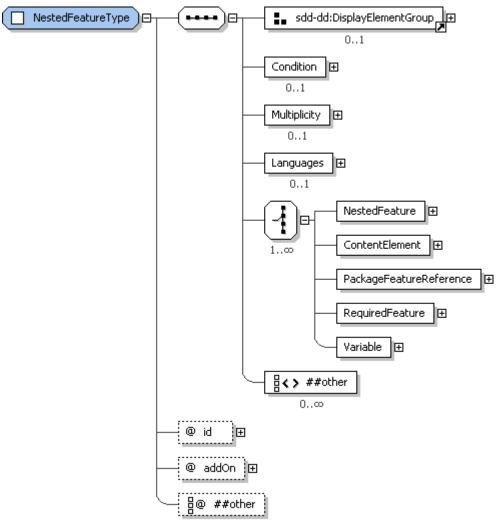


Figure 89: NestedFeatureType structure.

3333 3334

3335

3336 3337

3338

NestedFeatureType is identical to FeatureType except that NestedFeatureType does not define a required attribute. All features other than those defined directly below SelectableContent use the NestedFeatureType.

4.12.6.1 NestedFeatureType Property Summary

Name	Туре	*	Description
DisplayName	DisplayTextType	01	A human-readable name for the feature.
Description	DisplayTextType	01	A human-readable description of the feature.
ShortDescription	DisplayTextType	01	A human-readable short description of the feature.
Condition	ConditionType	01	A condition that determines if the feature is relevant to a particular deployment.
Multiplicity	MultiplicityType	01	Both an indication that multiple instances of the feature can be selected and the specification of their constraints.

Languages	LanguageSelectionsType		A list of language support available for the feature's content.
NestedFeature	NestedFeatureType	0*	A nested feature.
ContentElement	ContentElementReferenceType	0*	A reference to a content element to be deployed when the feature is selected.
PackageFeatureReference	PackageFeatureReferenceType	0*	A reference to a feature to be selected in a ContainedPackage defined in either the BaseContent or SelectableContent hierarchies.
RequiredFeature FeatureReferenceType		0*	A reference to a feature that is required when the defining feature is selected and so is selected automatically.
Variable	DerivedVariableType	0*	The definition of a variable that can be used anywhere in any variable expression in the SDD.
	xsd:any	0*	
id	xsd:ID	1	Used within the SDD to refer to the feature.
addOn xsd:boolean		01	A "true" value indicates that the feature can be added to a deployed instance of the solution. **default value="false"
	xsd:anyAttribute	0*	

4.12.6.2 NestedFeatureType Property Usage Notes

3339 3340

3341 3342

3345 3346

3347

3348

3349

3350

3351 3352

3353

3354

3355

3356

3357

3358

3359

- DisplayName: This element MAY be used to provide human-understandable information. If used, it
 MUST provide a label for the nested feature.
 - See the DisplayElementGroup section for structure and additional usage details [4.14.2].
- **Description, ShortDescription**: These elements MAY be used to provide human-understandable information. If used, they MUST provide a description of the nested feature.
 - The Description element MUST be defined if the ShortDescription element is defined.
 - See the *DisplayElementGroup* section for structure and additional usage details [4.14.2].
 - **Condition**: If the features and its nested features are only applicable in certain environments, a *Condition* can be defined. When the *Condition* is not met, the feature and its nested features are not in scope.

For example, some features may be available only on a Linux operating system, even though the software can be applied on other operating systems. In this case, a *Condition* can be defined to cause the feature to be ignored when the operating system is not Linux.

See the ConditionType section for structure and additional usage details [4.5.1].

 Multiplicity: When multiple instances of a feature can be selected, a Multiplicity element MUST be defined.

For example, a solution that includes a server and a client may allow the deployment of multiple clients. In this situation, a feature that defines a *Multiplicity* element would select the content elements that deploy the client software.

- See the MultiplicityType section for structure and usage details [4.12.7].
- Languages: Sometimes language support for a feature is different than that available for the overall solution. This is especially likely when features are implemented by aggregation of packages

- provided by different teams. When language support differs, the *Languages* element of the feature MUST be defined to state which languages are supported for the feature.
- When *Languages* is defined in a feature, it overrides the global declaration of supported languages and MUST declare the complete set of language support available for that feature.
- If *Languages* is not defined, the global declaration of supported languages in *CompositeInstallable* applies for the feature.
- 3368 See the Language Selections Type section for structure and additional usage details [4.13.4].
- NestedFeature: A NestedFeature must be explicitly selected. It is not assumed to be selected when the parent feature is selected. Selection of a nested feature causes its parent feature to be selected, but not vice-versa. The definition of a NestedFeature indicates that application of the NestedFeature is dependent on application of the parent feature.
- **ContentElement**: The *ContentElement* referred to MUST be in the selectable content hierarchy defined by the *SelectableContent* element.
 - When the content reference is to a *CompositeUnit*, the composite and all content elements below it in the content hierarchy are considered to be in scope when the feature is selected. Ease of referencing a group of content from a feature can be one reason for using a composite in the content hierarchy.
- 3378 See the ContentElementReferenceType section for structure and additional usage details [4.12.9].
- PackageFeatureReference: Selection of a feature may result in selection of an aggregated package's feature identified by a ContainedPackage element anywhere in the BaseContent or SelectableContent hierarchies. A PackageFeatureReference identifies both the ContainedPackage and the applicable features to be selected in that package.
 - See the PackageFeatureReferenceType section for structure and additional usage details [4.12.10].
- RequiredFeature: When the selection of one feature requires the selection of another feature, the RequiredFeature can be used to specify this requirement.
- When two features identify each other as required features, they are always selected together.
- The selection of the defining feature MUST cause the required feature to be selected.
- 3388 See the FeatureReferenceType section for structure and additional usage details [4.12.8].
- Variable: Variables defined in features are useful when inputs to an artifact need to vary based on which features are selected for a particular deployment. Artifact arguments can be defined in terms of feature Variables to allow for this variation. When an artifact deploys selectable content, inputs to the artifact that indicate the selections for a particular deployment can be associated with feature selection in the SDD via feature Variables.

For example, a *Feature* that deploys a trace facility might define a *Variable* called "TraceSettings". The value of an argument to a base content artifact might define its value as "\$(TraceSettings)". If the feature is selected, this argument would be used and its value would be taken from the feature *Variable*. If the feature is not selected, the argument would be ignored.

A *Variable* defined in a feature differs from *Variable* elements defined in content elements in one important way. A reference to an undefined feature *Variable* is treated as an empty string and is considered to be defined.

- See the *DerivedVariableType* section for structure and additional usage details [4.6.13].
- **id**: Provides the means to reference a feature from other features.
- The *id* attribute may be useful to software that processes the SDD, for example, for use in creating log and trace messages.
- **addOn**: When a solution and the artifacts that deploy the various parts of the solution are designed in a way that supports the addition of a particular feature at a later time (after the deployment of the base solution), the *addOn* attribute is set to "true".

3375

3376

3377

3383

3394

3395

3396

3397


3398

3399

3400

3401

3408 4.12.7 MultiplicityType



3409 3410

3411

3412 3413

3414

3415 3416

3417

3418 3419

3420

3421

3422

Figure 90: MultiplicityType structure.

Some solutions allow multiple instances of some portion of the solution's resources to be deployed as part of the solution.

For example, a solution that includes a server and a client may allow the deployment of multiple clients. The deployment of each client may involve content elements that represent several different resulting resources, features that control optional functionality of the client and configuration elements that configure the client. All of these can be defined within a "Client" feature that declares a *Multiplicity* element that indicates that multiple clients are allowed. Each selection or "instance" of the feature results in the deployment of a client.

The phrase "feature instance" is used to refer to the set of instances of all resources deployed when the feature is selected. It does not imply that features themselves are represented as having lifecycle or that features in the SDD correspond with feature instances in the deployment environment.

4.12.7.1 MultiplicityType Property Summary

Name	Туре	*	Description	
ConstrainedFeature	FeatureReferenceType		A nested feature whose selection must be the same for all instances of the defining feature in a particular deployment.	
ConstrainedResource	ConstrainedResource ConstrainedResourceType		A resource that must resolve to the same resource instance for all instances of the feature in a particular deployment.	
	xsd:any	0*		
multiplesAllowed	xsd:boolean	1	Indicates that multiple instances of the feature are allowed. **fixed value="true"	
minSelections xsd:positiveInteger		01	The minimum number of instances of the feature that must be selected if the feature is selected at all. **default value="1"	
maxSelections xsd:positiveInteger		01	That maximum number of instances of the feature that can be selected.	
	xsd:anyAttribute	0*		

4.12.7.2 MultiplicityType Property Usage Notes

3423

3439 3440

3441

3443


3445

3448

3450 3451

- ConstrainedFeature: A feature with multiplicity may contain NestedFeature elements. When a
 NestedFeature is identified in a ConstrainedFeature, then all instances of the defining Feature MUST
 make the same selection choice for that NestedFeature.
- 3427 See the FeatureReferenceType section for structure and additional usage details [4.12.8].
- ConstrainedResource: The content elements selected by a feature may express constraints on resources. When the resource constraints for each instance of a feature must resolve to the same resource instance, or when all must resolve to unique resource instances, the resource is referred to and the constraint type is identified in the *ConstrainedResource* element.
- 3432 See the ConstrainedResourceType section for structure and additional usage details [4.12.11].
- multiplesAllowed: This is an attribute with a fixed value of "true". It is included because all other elements and attributes of *MultiplicityType* are optional. A feature that allows multiples but has no need to define constraints on resources, features or number of instances would define a *Multiplicity* element that had only the *multiplesAllowed* attribute.
- **minSelections**: When a feature is selected, if more than one instance of the feature is required, minSelections MUST be specified.
 - maxSelections: When a feature is selected, if there is a limit on the number of instances of the
 feature that can be selected, maxSelections MUST be specified. If maxSelections is defined, it MUST
 be equal to or greater than minSelections.

3442 4.12.8 FeatureReferenceType



3444 Figure 91: FeatureReferenceType structure.

FeatureReferenceType provides a way to reference a feature defined in the SDD from within the SDD.

3446 **4.12.8.1 FeatureReferenceType Property Summary**

Name	Туре	*	Description
featureRef	xsd:IDREF	1	Reference to a feature defined in the deployment descriptor.
	xsd:anyAttribute	0*	

3447 4.12.8.2 FeatureReferenceType Property Usage Notes

• **featureRef**: The value MUST reference the *id* of a feature in the deployment descriptor.

3449 4.12.9 ContentElementReferenceType




Figure 92: ContentElementReferenceType structure.

3452 ContentElementReferenceType provides a way to reference a content element defined in the SDD from 3453 within a feature.

3454 4.12.9.1 ContentElementReferenceType Property Summary

Name	Туре	*	Description
contentElementRef	xsd:IDREF	1	Reference to a content element in the deployment descriptor's selectable content.
	xsd:anyAttribute	0*	

3455 4.12.9.2 ContentElementReferenceType Property Usage Notes

• **contentElementRef**: The value MUST reference the *id* of a content element in the deployment descriptor.

3458 4.12.10 PackageFeatureReferenceType

3456

3457

3459


3465 3466

3467

3468

3469 3470

3472 3473



3460 Figure 93: PackageFeatureReferenceType structure.

PackageFeatureReferenceType provides a way to reference a feature defined in a referenced SDD. It identifies the *ContainedPackage* element that references the SDD and the feature in the referenced SDD.

3463 **4.12.10.1 PackageFeatureReferenceType Property Summary**

Name	Туре	*	Description
contentElementRef	xsd:IDREF	1	Reference to a content element in the deployment descriptor.
packageFeatureRef	ef xsd:NCName		The feature's id as defined in the referenced package's deployment descriptor.
	xsd:anyAttribute	0*	

4.12.10.2 PackageFeatureReferenceType Property Usage Notes

- **contentElementRef**: This value MUST reference the *id* of a *ContainedPackage* element in *SelectableContent* or *BaseContent*. This reference does not cause the *ContainedPackage* to be in scope.
- packageFeatureRef: Specifies the value of the *id* of a feature element from the SDD of the *ContainedPackage* identified in *contentElementRef*. This feature reference is ignored when the *ContainedPackage* identified in *contentElementRef* is not in scope for a particular deployment.

3471 **4.12.11 ConstrainedResourceType**




Figure 94: ConstrainedResourceType structure.

A resource may be required during deployment of the content selected by a *Feature* instance. The requirement may exist because the resource is used in a *Requirement* statement, referred to in a *Variable* whose value is in scope for the particular deployment or referred to in a constraint in a *Condition* that is satisfied for the particular deployment. This is an in-scope, required resource for the particular deployment. The SDD author may wish to constrain in-scope, required resources to resolve to the same resource instance for all *Feature* instances or to resolve to unique resource instances for each *Feature* instance. This is done using a *ConstrainedResource* element.

4.12.11.1 ConstrainedResourceType Property Summary

3481

3482

3483

3484

3485

3486

3487

3488

3489 3490

3491

3492 3493

3494

3495

3496 3497

3498

3501 3502

3503

3504 3505

Name	Туре	*	Description
resourceRef	xsd:IDREF	1	A reference to the constrained resource.
constraintType	MultiplicityConstraintType	01	Indicates whether the constraint requires every instance of the resource to be the same or requires every instance to be different. **default value="same"
	xsd:anyAttribute	0*	

4.12.11.2 ConstrainedResourceType Property Usage Notes

- **resourceRef**: The value MUST reference the *id* of a resource element in *Topology*.
- **constraintType**: If there is a constraint, *constraintType* indicates that all resource instances be unique or that all resource instances be the same.

For example, all clients for a particular solution may need to connect to the same database. In this case, *constraintType* would be set to *same*. In other cases, each of the deployed resources might need to use its own unique instance of a required resource. If there could be only one client per operating system, a constraint on the operating system resource would set *constraintType* to *unique*.

See the MultiplicityConstraintType section for the enumeration values for constraintType [4.12.12].

4.12.12 MultiplicityConstraintType

This is a simple type that is used to indicate how resources declared in the *Multiplicity* element should be treated. Enumeration values are *same*, *unique*, or if a value is not specified, the SDD author is indicating that it doesn't matter.

4.12.12.1 MultiplicityConstraintType Property Usage Notes

- same: The value *same* is used to indicate that the constraint requires all resource instances MUST be the same.
- **unique**: The value *unique* is used to indicate that each resource instance MUST be unique.

3500 4.12.13 RequiredContentSelectionType




Figure 95: RequiredContentSelectionType structure.

When one SDD aggregates another, there needs to be an indication of which *Groups* and/or *Features* in the aggregated SDD should be selected. The *RequiredContentSelection* of the referenced package element identifies which elements MUST be selected when the defining package is selected.

3506 4.12.13.1 RequiredContentSelectionType Property Summary

Name	Туре	*	Description
Group	xsd:token	01	A reference to the group to be selected.
Feature	ContentSelectionFeatureType	0*	A reference to a feature to be selected.

3507 4.12.13.2 RequiredContentSelectionType Property Usage Notes

- **Group**: The *Group* value is the identifier of a *Group* in the aggregated SDD. This value MUST reference the *id* of a *Group* element in the deployment descriptor denoted by the referenced package.
- **Feature**: The *Feature* element value is the identifier of the feature in the aggregated SDD. Attributes indicating the number of selections to be made can be included. The feature value MUST be the *id* of a feature element in the deployment descriptor denoted by the referenced package.
- If Group is also defined, Feature SHOULD be a feature that is not selected by the Group.
- 3514 See the ContentSelectionFeatureType section for structure and additional usage details [4.12.14].

3515 4.12.14 ContentSelectionFeatureType

3508 3509

3510

3511

3512 3513

3516 3517

3518

3519 3520

3521 3522

3523

3524

3525

3527

3528

3529




Figure 96: ContentSelectionFeatureType structure.

The *ContentSelectionFeatureType* allows for the definition of the number of times a feature can be referenced if that feature includes a *Multiplicity* element.

For example, a software package has a server and client; the server can be deployed only on one machine, but the client can be deployed on multiple machines and configured to reference the one server. The server, for performance reasons, is limited to 10 client connections. To limit the number of times the client can be deployed, the *selections* attribute should be set to "10".

4.12.14.1 ContentSelectionFeatureType Property Summary

Name	Туре	*	Description	
	[extends] xsd:token		See the xsd:token definition in [XSD].	
selections	VariableExpressionType	01	The number of times a feature with Multiplicity in the referenced package should be deployed.	

4.12.14.2 ContentSelectionFeatureType Property Usage Notes

3526 See the xsd:token definition in [XSD] for inherited attributes and elements.

- **selections**: The value of *selections* MUST be, or resolve to, a positive integer that is within the bounds of the *minSelections* and *maxSelections* attributes defined in the *Multiplicity* element of the referenced feature.
- 3530 See the VariableExpressionType section for structure and additional usage details [4.6.1].

3531 4.12.15 MultiSelectType

3532 3533

3534

3535 3536

3537

3538

3540

3545

3546

3547

3552 3553

3554

3555

3556 3557

3558

3559

3560

3561




Figure 97: MultiSelectType structure.

MultiSelectType defines a way to associate features with a defined minimum and maximum number of selections allowed. A MultiSelect element MAY be used to support identification of mutually exclusive features.

4.12.15.1 MultiSelectType Property Summary

Name	Туре	*	Description
Feature	FeatureReferenceType	2*	A reference to a feature in the list of features defined in the MultiSelect element.
minSelections	xsd:nonNegativeInteger	01	Minimum number of features that must be selected. **default value="0"
maxSelections	xsd:positiveInteger	01	Maximum number of features that can be selected.

4.12.15.2 MultiSelectType Property Usage Notes

- **Feature**: The value MUST reference the *id* of a feature element.
 - See the FeatureReferenceType section for structure and additional usage details [4.12.8].
- minSelections, maxSelections: When it is not necessary that any of the features in the *MultiSelect* list be selected, the default of "0" can be used.
- 3543 Mutually exclusive features can be defined using a *MultiSelect* element with two features, 3544 *minSelections* set to "0" and *maxSelections* set to "1".
 - If multiple instances of a single feature are selected via multiplicity, the set of multiple instances count only once toward the minimum and maximum. In other words, the count is based solely on the features selected, not on how many instances of each feature are selected.
- When *maxSelections* is not defined, all of the features in the *MultiSelect* MAY be selected for a particular deployment.
- If defined, the *maxSelections* value MUST be greater than or equal to the *minSelections* value and MUST be less than or equal to the number of referenced features.

4.13 Localization

- Localization refers to enabling a particular piece of software to support one or more languages. Anything that needs to be deployed to provide support for a particular language in that software is considered localization content. Translated materials are a primary, but not the only, example of localization content.
- Localization content is similar in many ways to other content, but there are important differences in how localization content is selected for deployment that lead to the need for a separate content hierarchy and separate types. Two criteria determine whether or not localization content is in scope for a particular deployment:
 - The first criterion has to do with the language or languages supported by the localization content. At least one of the languages must be in scope for the content to be selected.

The second criterion has to do with the availability of the resources to be localized—the localization base. The localization base may be a resource deployed by base or selectable content, or it may be a resource previously deployed and found in the deployment environment.

The types described in this section support definition of metadata describing the criteria for determining when localization content is in scope.

4.13.1 LocalizationContentType




Figure 98: LocalizationContentType structure.

The *LocalizationContent* tree contains all content created specifically to provide localization by deploying language-specific materials for a particular location. The localization support provided can be for content defined in the SDD or it can be for resources in the deployment environment that are not created or modified by deployment of the SDD. Each element defined in the *LocalizationContent* hierarchy is in scope for a particular deployment when it supports a language that is in scope for that deployment and when its localization base, if any, is available.

4.13.1.1 LocalizationContentType Property Summary

Name	Туре	*	Description
LocalizationUnit	LocalizationUnitType	0*	Contains artifacts that create, modify or delete language support.
ContainedLocalizationPackage	ReferencedPackageType	0*	Identifies an SDD whose contents are aggregated to create, modify or delete language support.
CompositeLocalizationUnit	CompositeLocalizationUnitType	0*	An organizational element that groups localization content and defines metadata common to all the grouped content.

4.13.1.2 LocalizationContentType Property Usage Notes

- LocalizationUnit: When there is no need to group a LocalizationUnit with other units that have common metadata, the LocalizationUnit is defined at the top level of the hierarchy. A LocalizationUnit defined at the top level of the LocalizationContent hierarchy is in scope for a particular deployment when its Condition and LocalizationBase, if any, evaluate to true and its Languages element, if any, defines a language that is in scope for the deployment.
 - See the LocalizationUnitType section for structure and additional usage details [4.13.2].
- ContainedLocalizationPackage: ContainedLocalizationPackage definitions include a list of languages supported by the contained package. The package need not be processed if none of those languages is in scope for a particular deployment.
 - See the ReferencedPackageType section for structure and additional usage details [4.10.1].
- **CompositeLocalizationUnit**: CompositeLocalizationUnit is a construct that allows organization of localization content in a way that is meaningful to the SDD author.

One example use of a *CompositeLocalizationUnit* is to group a set of *LocalizationUnits* that provide support for a variety of languages for the same resource. This eliminates the need to define identical *LocalizationBase* elements in every *LocalizationUnit*. It can be defined once in the *CompositeLocalizationUnit*.

If evaluation of the *CompositeLocalizationUnit's Condition*, *Languages* and *LocalizationBase*determines that it is not selected for deployment, none of the content elements defined below it in the hierarchy are selected.

Requirements, Variables, Conditions and Completion elements common to all child content elements MAY be defined once in the CompositeLocalizationUnit rather than once in each nested element.

See the CompositeLocalizationUnitType section for structure and additional usage details [4.13.3].

4.13.2 LocalizationUnitType

3597

3598

3599

3600

3601 3602

3603

3604

3605

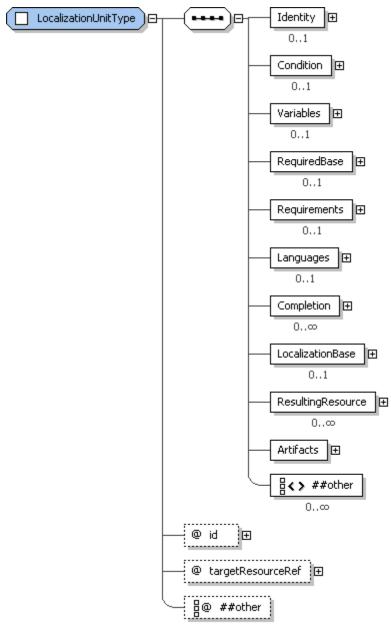


Figure 99: LocalizationUnitType structure.

The *LocalizationUnit* element defines artifacts that deploy localization content for one group of resources whose translations are packaged together. Localization content consists of materials that have been translated into one or more languages.

4.13.2.1 LocalizationUnitType Property Summary

3606

3607 3608

3609

3610 3611

3612

3613

3614

3615 3616

3617

3618

3619 3620

Name	Туре	*	Description
Identity	IdentityType	01	Human-understandable identity information about the LocalizationUnit.
Condition	ConditionType	01	A condition that determines if the content element is relevant to a particular deployment.
Variables	VariablesType	01	Variables that can be referenced in the LocalizationUnit's requirement and artifact definitions.
RequiredBase	RequiredBaseType	01	A resource that will be updated when the LocalizationUnit's UpdateArtifact is processed.
Requirements	RequirementsType	01	Requirements that must be met prior to successful processing of the LocalizationUnit's artifacts.
Languages	LanguagesType	01	The LocalizationUnit's artifacts contain materials translated into these languages.
Completion	CompletionType	0*	Describes completion actions such as restart and the conditions under which the action is applied.
LocalizationBase	RequiredBaseType	01	A resource whose translatable characteristics will be localized by processing the LocalizationUnit's InstallArtifact.
ResultingResource	ResultingResourceType	0*	A resource that will be installed or updated by processing the LocalizationUnit's artifacts.
Artifacts	InstallationArtifactsType	1	The set of artifacts associated with the LocalizationUnit.
	xsd:any	0*	
id	xsd:ID	1	An identifier for the LocalizationUnit scoped to the deployment descriptor.
targetResourceRef	xsd:IDREF	1	Reference to the resource that can process the LocalizationUnit's artifacts.
	xsd:anyAttribute	0*	

4.13.2.2 LocalizationUnitType Property Usage Notes

- Identity: The *Identity* element defines human-understandable information that reflects the identity of the provided localization resources as understood by the end user of the solution. *Identity* has elements that are common with elements in the corresponding *PackageDescriptor's PackageIdentity* element, for example, *Name* and *Version*. The values of these common elements SHOULD be the same as the corresponding *PackageIdentity* element values.
 - See the *IdentityType* section for structure and additional usage details [3.4].
- **Condition**: A *Condition* is used when the *LocalizationUnit's* content should be deployed only when certain conditions exist in the deployment environment.

For example, for a package that has one artifact that should be processed when the operating system is Linux and another artifact that should be processed when the operating system is Windows, the *LocalizationUnit* defining metadata for the Linux artifact would have a condition on the operating system being Linux. The *LocalizationUnit* defining metadata for the Windows artifact would have a condition on the operating system being Windows.

- Conditions should not be used to identify the resource that will be localized by the LocalizationUnit.

 The LocalizationBase element is used for that purpose. A LocalizationUnit can have both a Condition and a LocalizationBase.
- See the *ConditionType* section for structure and additional usage details [4.5.1].
- Variables: A Variables element defines variables that can be used in the definition of requirements and artifact parameters.
- When the deployment descriptor defines a single *LocalizationUnit* at the top level, that is, not inside a *CompositeInstallable*, the variables it defines can also be referred to in any element under *Topology*.
- 3629 See the *VariablesType* section for structure and additional usage details [4.6.3].
- RequiredBase: RequiredBase identifies the resource that must exist prior to applying the LocalizationUnit's update artifact.
- 3632 See the *RequiredBaseType* section for structure and additional usage details [4.7.8].
- **Requirements**: Requirements MUST be met prior to processing the LocalizationUnit's artifacts.
- 3634 See the *RequirementsType* section for structure and additional usage details [4.7.1].
- **Languages**: Languages lists the languages of the translated material deployed by the LocalizationUnit.
- 3637 See the *LanguagesType* section for structure and additional usage details [4.13.6].
- **Completion**: A *Completion* element MUST be included if the artifact being processed requires a system operation such as a reboot or logoff to occur to function successfully after deployment or if the artifact executes a system operation to complete deployment of the contents of the artifact.
 - There MUST be an artifact associated with the operation defined by a Completion element.
 - For example, if there is a *Completion* element for the *install* operation, the *LocalizationUnit* must define an *InstallArtifact*.
- 3644 See the *CompletionType* section for structure and additional usage details [4.3.14].
- LocalizationBase: LocalizationBase identifies the resource or resources that can be localized by processing the LocalizationUnit. A resource that satisfies the constraints defined in the LocalizationBase is one that can be localized by applying the LocalizationUnit.
- If no resource is found that meets the constraints defined in *LocalizationBase* during a particular deployment, then the *LocalizationUnit* is not considered to be in scope for that deployment. This does not represent an error.
- Translations created or modified by the *LocalizationUnit* are for human-readable text included with the *LocalizationBase* resources.
- 3653 See the RequiredBaseType section for structure and additional usage details [4.7.8].
- **ResultingResource**: The *ResultingResources* for a *LocalizationUnit* MUST NOT identify resources other than localization resources.
- 3656 See the ResultingResourceType section for structure and additional usage details [4.8.1].
- Artifacts: When the *LocalizationUnit* is a singleton defined outside of a *CompositeInstallable*, it
 MUST define at least one artifact element and MAY define one of each type of artifact element
 allowed for its type. The inclusion of an artifact element in a singleton *LocalizationUnit* implies support
 for the associated operation.
 - When the *LocalizationUnit* is defined within a *CompositeInstallable*, it MUST define exactly one artifact. The artifact defined MAY be any artifact allowed in a *LocalizationUnit* and it MUST support the single top level *operation* defined by the *CompositeInstallable*. This does not mean the operation associated with the artifact has to be the same as the one defined by the *CompositeInstallable*.
 - For example, an install of a localization resource may be required during the update of the overall solution, in which case the *LocalizationUnit* would define an *InstallArtifact* to support the top level update operation.
 - See the InstallationArtifactsType section for structure and additional usage details [4.3.4].

3642

3643

3661

3662

3663

3664 3665

3666

3667 3668

- **id**: The *id* attribute may be useful to software that processes the SDD, for example, for use in creating log and trace messages.
 - **targetResourceRef**: The *targetResourceRef* attribute MUST reference the *id* of a resource element in *Topology* that will process the *LocalizationUnit's* artifacts to create or modify the localization resources identified in the *LocalizationUnit's* ResultingResource elements.

4.13.3 CompositeLocalizationUnitType

3671

3672 3673

3674

3675 3676

3677

3678

3679

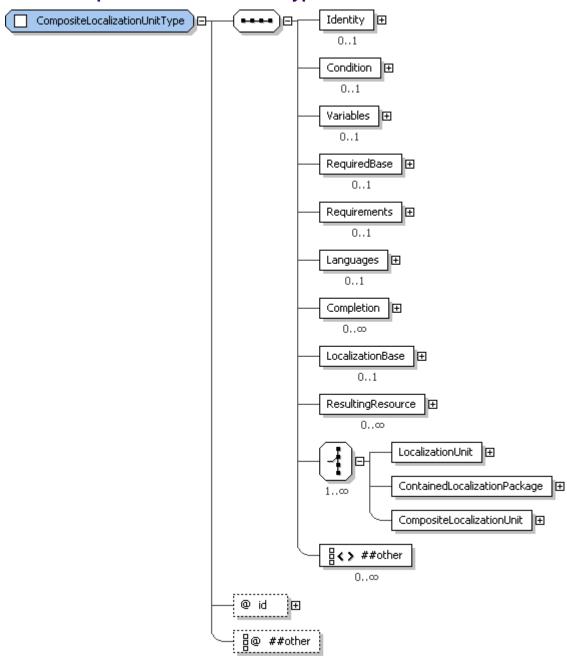


Figure 100: CompositeLocalizationUnitType structure

CompositeLocalizationUnitType provides the type definition for all CompositeLocalizationUnit elements in the LocalizationContent hierarchy. CompositeLocalizationUnit elements define nested localization content elements and metadata that applies to all of the nested elements.

3680 4.13.3.1 CompositeLocalizationUnitType Property Summary

Name	Туре	*	Description
Identity	IdentityType	01	Human-understandable identity information about the CompositeLocalizationUnit.
Condition	ConditionType	01	A condition that determines if the CompositeLocalizationUnit is relevant to a particular deployment.
Variables	VariablesType	01	Variables for use within the CompositeLocalizationUnit and content elements nested beneath it in the hierarchy.
RequiredBase	RequiredBaseType	01	A resource that will be updated when the nested elements are processed.
Requirements	RequirementsType	01	Requirements that must be met prior to successful processing of the nested content elements.
Languages	LanguagesType	01	Localization elements defined within CompositeLocalizationUnit contain materials translated into these languages.
Completion	CompletionType	0*	Describes completion actions such as restart and the conditions under which the action is applied.
LocalizationBase	RequiredBaseType	01	A resource whose translatable characteristics will be localized by processing the nested content elements.
ResultingResource	ResultingResourceType	0*	A localization resource that will be installed or updated by processing the nested content elements.
LocalizationUnit	LocalizationUnitType	0*	Contains artifacts that will create, modify or delete language support.
ContainedLocalizationPackage	ReferencedPackageType	0*	Identifies an SDD whose contents are aggregated to create, modify or delete language support.
CompositeLocalizationUnit	CompositeLocalizationUnitType	0*	An organizational element that groups localization content and defines metadata common to all the grouped content.
	xsd:any	0*	
id	xsd:ID	1	An identifier for the CompositeLocalizationUnit that is unique within the deployment descriptor.
	xsd:anyAttribute	0*	

4.13.3.2 CompositeLocalizationUnitType Property Usage Notes

• **Identity**: The *CompositeLocalizationUnit*, like all content elements, is a unit of packaging. Its identity is the identity of a unit of packaging and may be useful to package management tools. The identity MAY be similar or identical to the identity of the *ResultingResource(s)*.

3681 3682

3683 3684

- See the *IdentityType* section for structure and additional usage details [3.4].
- **Condition**: If the composite and the elements nested beneath it are applicable only in certain environments, a *Condition* can be defined. When the *Condition* is not met, the composite and its nested elements are not in scope.
- 3689 See the *ConditionType* section for structure and additional usage details [4.5.1].
- Variables: Variables used by more than one nested element can be defined in the
 CompositeLocalizationUnit for efficiency both in composing and processing the SDD. Variables are visible to all nested content elements.
- 3693 See the *VariablesType* section for structure and additional usage details [4.6.3].
- **RequiredBase**: If the processing of all the update artifacts in the nested content elements results in a single resource being updated, that resource can be defined in the *CompositeLocalizationUnit's RequiredBase* element.
- 3697 See the RequiredBaseType section for structure and additional usage details [4.7.8].
- Requirements: When a *CompositeLocalizationUnit* is in scope for a particular deployment—as determined by evaluation of its *LocalizationBase* and *Languages* properties—then its requirements MUST be met.
- 3701 See the *RequirementsType* section for structure and additional usage details [4.7.1].
- 3702 Languages: The Languages element in the CompositeLocalizationUnit MUST NOT be defined or MUST define the union of all languages supported by the nested content elements. For nested 3703 content elements to be evaluated to determine if they are in scope, the CompositeLocalizationUnit 3704 must be in scope. When Languages is present in the CompositeLocalizationUnit, it must define one of 3705 3706 the languages in scope for the particular deployment if any of the nested elements are to be evaluated. If Languages is not present in a CompositeLocalizationUnit, evaluation of all the child 3707 3708 elements still is required, as long as the other elements of CompositeLocalizationUnit have evaluated 3709 to true. When the Languages and/or the LocalizationBase element in a CompositeLocalizationUnit is 3710 not defined, the nested content elements must be evaluated to determine if they are in scope.
- 3711 See the *LanguagesType* section for structure and additional usage details [4.13.6].
- **Completion**: When a particular completion action applies to all nested elements and should be performed only once for the entire group, it can be defined in the *CompositeLocalizationUnit* rather than in each individual element.
- 3715 See the *CompletionType* section for structure and additional usage details [4.3.14].
- LocalizationBase: A LocalizationBase element evaluates to true when the resource identified in the base is created by a content element that is in scope for the deployment or it already exists in the deployment environment.
- When the *LocalizationBase* is defined it must evaluate to true for any of the nested content elements to be evaluated. If it evaluates to false, none of the nested content elements are in scope. If it evaluates to true, the nested content elements may be in scope.
- When the *LocalizationBase* and/or the *Languages* element in a *CompositeLocalizationUnit* is not defined, the nested content elements must be evaluated to determine if they are in scope.
- 3724 See the RequiredBaseType section for structure and additional usage details [4.7.8].
- **ResultingResource**: If there are one or more resources that will be created when the nested content elements are processed, they can be defined here.
- 3727 See the ResultingResourceType section for structure and additional usage details [4.8.1].
- LocalizationUnit: LocalizationUnits defined within the composite typically have common metadata.

 Metadata defined in the composite does not need to be repeated in the nested element. Definitions in the nested LocalizationUnit are additions to those defined in the composite.
- 3731 See the *LocalizationUnitType* section for structure and additional usage details [4.13.2].
- ContainedLocalizationPackage: A ContainedLocalizationPackage is defined in a
 CompositeLocalizationUnit for the same reasons that a LocalizationUnit is-because it has metadata in common with other elements defined in the composite.

- 3735 See the ReferencedPackageType section for structure and additional usage details [4.10.1].
- CompositeLocalizationUnit: A CompositeLocalizationUnit can be nested inside another
 CompositeLocalizationUnit when some of the metadata is shared only by a subset of the elements nested in the higher level composite.

For example, the higher level composite might contain operating system requirements that apply to all localization content and nested composites might group localization content by localization base.

id: This *id* is not referred to by any other element in the deployment descriptor.

The *id* attribute may be useful to software that processes the SDD, for example, for use in creating log and trace messages. It also may be useful for associating custom discovery logic with the *CompositeLocalizationUnit's* resource-related elements.

3746 4.13.4 LanguageSelectionsType

3739

3740

3741

3743

3744

3745

3747

3748 3749

3750

3751

3753 3754

3755

3758

3759

3762 3763

3764 3765

3766

3767




Figure 101: LanguageSelectionsType structure.

LanguageSelectionsType provides the type definition for the Languages element in CompositeInstallable that describes the languages supported by the SDD as a whole. It also provides the type definition for the Languages element in features that allows a feature to override the SDD-wide definitions.

3752 4.13.4.1 LanguageSelectionsType Property Summary

Name	Туре	*	Description
Mandatory	LanguagesType	01	The set of languages that will be deployed.
Optional	OptionalLanguagesType	01	The set of language selections available to the deployer.

4.13.4.2 LanguageSelectionsType Property Usage Notes

- Mandatory: The deployer has no ability to determine if a mandatory language will be deployed.
 See the LanguagesType section for structure and additional usage details [4.13.6].
- **Optional**: Each language group in the list of optional languages defines a list of one or more languages that can be selected together.
 - Language groups defined in *LanguageSelections* MAY be used to allow the deployer to select individual languages or to allow selection of multiple languages as a single choice.
- 3760 See the OptionalLanguagesType section for structure and additional usage details [4.13.5].

3761 **4.13.5 OptionalLanguagesType**




Figure 102: OptionalLanguagesType structure

OptionalLanguagesType supports definition of a language or sets of languages that the deployer can optionally choose for deployment. This type is used to define the global set of optional languages in CompositeInstallable as well as any Feature-specific set that overrides the global set for a particular Feature.

3768 **4.13.5.1 OptionalLanguagesType Property Summary**

Name	Туре	*	Description	
Language	LanguageType	1*	A single language that can be chosen individually.	
LanguageSet	LanguageSetType	1*	A set of languages that can be chosen together.	

3769 4.13.5.2 OptionalLanguagesType Property Usage Notes

- **Language**: When the SDD author allows the deployer to individually select a language for deployment, it is defined in a *Language* element within *OptionalLanguages*.
- 3772 See the *LanguageType* section for structure and usage details [4.13.7].
- LanguageSet: When the SDD author allows the deployer to select languages for deployment as a set, it is defined in a *LanguageSet* element within *OptionalLanguages*.
 - One example of a reason to define optional languages in a set rather than individually is for a group of languages that are packaged together and whose deployment cannot be separated.
 - See the LanguageSetType section for structure and additional usage details [4.13.8].

3778 4.13.6 LanguagesType

3775

3776 3777

3779 3780

3781

3782

3783

3786 3787

3790 3791



Figure 103: LanguagesType structure.

Languages Type supports expression of a list of languages. It is used in the Languages elements of content elements to list languages supported by that content element. It is also used as the type of the Mandatory element that lists languages that are deployed by default.

3784 **4.13.6.1 LanguagesType Property Summary**

Name	Туре	*	Description
Language	LanguageType	1*	A single language definition.

3785 4.13.6.2 LanguagesType Property Usage Notes

- Language: Each language definition MAY include display information as well as the language code that identifies the language.
- 3788 See the *LanguageType* section for structure and additional usage details [4.13.7].

3789 **4.13.7 LanguageType**




Figure 104: LanguageType structure.

3792 *LanguageType* supports the definition of display information and the language code for one language. It is used everywhere a language is defined in the SDD.

3794 **4.13.7.1 LanguageType Property Summary**

Name	Туре	*	Description
DisplayName	DisplayTextType	01	A name for the language.
Description	DisplayTextType	01	A description of the language.
ShortDescription	DisplayTextType	01	A short description of the language.
type	xsd:language	1	The locale code for the language.

3795 **4.13.7.2 LanguageType Property Usage Notes**

- **DisplayName**: This element MAY be used to provide human-understandable information. If used, it MUST provide a label for the language.
- See the DisplayElementGroup section for structure and additional usage details [4.14.2].
- **Description, ShortDescription**: These elements MAY be used to provide human-understandable information. If used, they MUST provide a description of the language.
- The Description element MUST be defined if the ShortDescription element is defined.
 - See the DisplayElementGroup section for structure and additional usage details [4.14.2].
 - **type**: The *type* attribute MUST be defined as a value that conforms to the set of language codes defined by [RFC3066].
 - For example, "de" is a locale code for German and "en-US" is the locale code for English in the United States.

3807 4.13.8 LanguageSetType

3796

3797

3798

3802

3803

3804

3805


3806

3808

3814

3815

3816



3809 Figure 105: LanguageSetType structure.

2810 LanguageSetType provides the type definition for the OptionalLanguages elements of

3811 CompositeInstallable and Feature. It defines a set of languages that can be selected together.

3812 **4.13.8.1 LanguageSetType Property Summary**

Name	Туре	*	Description
DisplayName	DisplayTextType	01	A name for the set of languages.
Description	DisplayTextType	01	A description of the set of languages.
ShortDescription	DisplayTextType	01	A short description of the set of languages.
Language	LanguageType	1*	A set of one or more language codes.

3813 4.13.8.2 LanguageSetType Property Usage Notes

- **DisplayName**: This element MAY be used to provide human-understandable information. If used, it MUST provide a label for the set of languages.
 - For example, "Eastern European Languages" or "French, English and German".
- 3817 See the *DisplayElementGroup* section for structure and additional usage details [4.14.2].

- 3818 **Description**, **ShortDescription**: These elements MAY be used to provide human-understandable information. If used, they MUST provide a description of the set of languages.
- The Description element MUST be defined if the ShortDescription element is defined.
- 3821 See the *DisplayElementGroup* section for structure and additional usage details [4.14.2].
- 3822 Language: The languages defined in this element MUST be selected together.
- 3823 See the Language Type section for structure and additional usage details [4.13.7].

4.14 Display Information

There are many places throughout the SDD where translatable information intended for display to humans MAY be defined. All display information definitions can include a *translationKey* that can be used as an index into a file containing translations.

3828 4.14.1 DescriptionGroup

3824

3829 3830

3833

3834 3835

3838

3839

3840

3843 3844

3845

3846

3847

3848 3849

3850 3851




Figure 106: DescriptionGroup structure.

The *DescriptionGroup* type is used throughout the SDD to provide human-readable, translatable, descriptive-text elements.

4.14.1.1 DescriptionGroup Property Usage Notes

- **Description**: This is a description of the defining element unless usage notes for that element state otherwise. It can be as long as necessary to provide a useful description.
- 3836 The Description element MUST be defined if the ShortDescription element is defined.
- 3837 See the *DisplayTextType* section for details about associating this text with translated text [4.14.3].
 - ShortDescription: This is a short description of the defining element unless usage notes for that
 element state that it refers to something else. It SHOULD provide a limited description that can be
 used by tools where limited text is allowed, for example, fly-over help.
- See the *DisplayTextType* section for details about associating this text with translated text [4.14.3].

3842 4.14.2 DisplayElementGroup




Figure 107: DisplayElementGroup structure.

The *DisplayElementGroup* is used throughout the package descriptor and deployment descriptor to provide human-readable, translatable names, descriptions and/or short descriptions for a variety of elements.

4.14.2.1 DisplayElementGroup Property Usage Notes

 DisplayName: This is a label for the defining element unless usage notes for that element state otherwise.

See the DisplayTextType section for details about associating this text with translated text [4.14.3].

3852 4.14.3 DisplayTextType

3853 3854

3855

3856

3857 3858

3859

3860 3861

3862



Figure 108: DisplayTextType Structure.

Elements of *DisplayTextType* define translatable strings and an optional key to translated text in language bundle files. *DisplayTextType* extends the xsd:string type with an optional *translationKey* attribute.

4.14.3.1 DisplayTextType Property Usage Notes

translationKey: The translationKey attribute is a value that can be used as an index into a file containing translations of DisplayTextType elements in the DeploymentDescriptor and/or PackageDescriptor. The value of the translationKey MUST match an entry in the message bundle referenced by the descriptorLanguageBundle attribute in the package descriptor.

5 Conformance

3863

3864

3868

3879

5.1 General Conformance Statements

An implementation MAY claim conformance to the entirety of the SDD specification (including all conformance levels) or one or more particular conformance levels, and/or one or more particular profiles (SDD conformance levels and profiles are detailed next).

5.2 Conformance Levels

An SDD conformance level (CL) is defined, consistent with **[CONFORM]**, as a subset of the schema intended to enable a certain set of capabilities to be achieved, based on SDDs that restrict their content to the particular CL. The purpose of conformance levels is to allow subsets of the full set of capabilities that can be expressed using an SDD to be implemented. The proper subsets are expected to be easier to implement, but still offer features, value and interoperability that make it worthwhile to implement a particular CL in certain circumstances.

3875 SDD conformance levels are designated as CL1 and CL2. CL1 is a proper subset of the schema; CL2 represents the full schema. CL1 is the minimal set or core of the specification that shall be implemented by all products. CL2 includes all of CL1 and consists of the entire specification.

3878 The following sections describe the defined CLs for SDD.

5.2.1 CL Capabilities

3880 Table 1 expresses the capabilities for each defined CL.

	s the capabilities for each defined OL.	
	Conformance Level 1	Conformance Level 2
Description	Single target, simple package.	Multi-target, aggregated packages; full deployment capabilities with all functions enabled by the SDD schema.
Objective	Serve as the "on-ramp" for SDD adoption. Deploy pre-prepared content that needs limited customization (basic parameters). Descriptors serve as contract between assembly and operations. Exemplary use case is "wrappering" existing packages in SDD.	Serve as the expected level for newly-authored non-legacy SDDs. Deploy newly-prepared content that has related components in a solution, with various topologies. Most robust specification (and corresponding run-time implementations) of SDD. Exemplary use case is non-trivial, non-legacy solution deployment.
Included Schema Functions	 Solution package with single component (singleton IU, CU, or LU; no composite) and single target topology Solution package dependency checking for given environment base installations and maintenance Simple uninstall (based on information in single descriptor) Ability to deploy existing artifact formats appropriate for the target 	All functions, including: Aggregation (composites) Features Selectable features Conditional content Variable-target topology Robust localization

	 environment Some localization possible (localization of the units that are supplied) 	
Excluded Functions	 Features Selectable content Requisites Aggregation Multi-target topology Robust localization Replacements and modifications that change base resource/solution composition (including obsolescence) Backwards compatibility, range enforcement Verification of installation and configuration 	None

Table 1: SDD conformance level capabilities summary.

5.2.2 Conformance Level Differences

CL1 SDDs can be used to describe the inputs, requirements and results of processing a single deployment artifact. This artifact could be one that deploys, updates, configures or localizes software resources. This is useful for simple deployments that require only a single artifact. CL2 SDDs add support for aggregation of multiple artifacts and SDDs into solutions; definition of features that optionally select content; and requisite software that can be deployed if needed to satisfy requirements. CL1 SDDs can be aggregated by CL2 SDDs.

For example, CL2 SDDs can describe a solution that consists of a Web server, an application server, a database and one or more applications, in which each of these components is described by its own individual SDD and an aggregating CL2 SDD aggregates them into the composite solution.

The differences between CL1 and CL2 that are summarized in Table 1 are detailed next. These make use of the information that is in the SDD schema; see [CL1_Schema] for the CL1 schema files, and [CL2_Schema] for the CL2 schema files. The differences between the CL1 and CL2 schema files are isolated to the "sdd-dd" namespace. The "sdd-common" and "sdd-pd" namespaces contain identical schema files for each namespace with respect to CL1 and CL2.

5.2.2.1 Type Definitions Modified in CL2

A few SDD types used in CL1 have additional elements added in CL2. The types listed in the left column of Table 2 exist in both CL1 and CL2 with different definitions. The elements in the right column are the sub-elements added to the type definitions in CL2.

Type Name	CL2 Sub-Element Names
DeploymentDescriptorType	Requisites CompositeInstallable
InstallationArtifactsType	RepairArtifact
ResultingResourceType	Relationship
ResultingChangeType	Relationship
ResourceConstraintGroup	UniquenessConstraint

Type Name	CL2 Sub-Element Names
	RelationshipConstraint
ConditionalResourceConstraintType	UniquenessConstraint RelationshipConstraint
RequirementType	Dependency
AlternativeRequirementType	Dependency

3902 Table 2. Modified Types.

5.2.2.2 Type Structures Modified in CL2

Several SDD types have altered structure between CL1 and CL2. The types listed in the left column of Table 3 are valid for both CL1 and CL2; however, valid structure for these types differs between CL1 and CL2, as shown in the center and right columns.

3906
3907

3903

3904

3905

Туре	CL1 Structure	CL2 Structure
DeploymentDescriptorType	Choice of one of the following: InstallableUnit, ConfigurationUnit, or LocalizationUnit	Choice of one of the following: InstallableUnit, ConfigurationUnit, or LocalizationUnit;
		or one or more CompositeInstallable elements
RequirementType	Sequence of ResourceConstraint elements	Unbounded choice of ResourceConstraint elements and Dependency elements
AlternativeRequirementType	Sequence of ResourceConstraint elements	Unbounded choice of ResourceConstraint elements and Dependency elements

Table 3. Altered types in CL2.

5.2.2.3 SDD Types Introduced in CL2

As seen in Table 2, CL2 adds two new elements to *DeploymentDescriptor*. The *CompositeInstallable* element provides the definition of an aggregate deployment. *CompositeInstallable* is a complex element with many sub-elements. The second element added to *DeploymentDescriptor* is *Requisites*. *Requisites* is a list of references to SDDs that can be used, if needed, to satisfy deployment requirements defined in the *CompositeInstallable*.

Table 4 includes the CL2 types that are introduced in support CompositeInstallable and Requisites

391	5
391	6

3908

3909 3910

3911

3912

3913 3914

BaseContentType	FeatureType	PackageFeatureReferenceType
CompositeInstallableType	GroupsType	ReferencedPackageType
CompositeLocalizationType	GroupType	RelationshipConstraintType
CompositeUnitType	InternalDependencyType	RelationshipType
ConstrainedResourceType	LanguageSelectionType	RequiredContentSelectionType
ContentElementReferenceType	LocalizationContentType	RequisitesType
ContentListGroup	MultiplicityConstraintType	ResourceMapType

ContentSelectionFeatureType MultiplicityType ResultingChangeMapType DependencyType MultiSelectType ResultingResourceMapType FeatureReferenceType NestedFeatureType SelectableContentType FeaturesType OptionalLanguagesType UniquenessConstraintType

3917 Table 4 SDD types introduced in CL2.

5.2.2.4 Extended Enumeration Value in CL2

One SDD type has an additional enumeration value that is valid only for CL2-based implementations. The 3919 type listed in the left column of Table 5 is valid for both CL1 and CL2; however, the value in the right 3920 column is valid only for CL2.

3921

3918

3922

3924

3943

3951

Туре	CL2 Enumeration Value
OperationType	repair

3923 Table 5 Extended enumeration value in CL2.

5.3 Profiles

- 3925 Profiles are intended to specify detailed information that can be used in an SDD to promote 3926 interoperability. An SDD profile is defined consistent with [CONFORM], to identify the functionality, 3927 parameters, options and/or implementation requirements necessary to satisfy the requirements of a particular community of users. SDD profiles are intended to enable a specific set of use cases, typically in 3928 3929 a particular domain. Profiles are considered largely orthogonal to CLs; whereas a CL is a subset of the 3930 schema, a profile specifies the usage of the schema, including appropriate conventions and content 3931 values, to accomplish a particular set of use cases (typically in a particular domain).
- 3932 A starter profile is initially defined with version 1.0 of this specification and is published separately. This 3933 starter profile defines terms and patterns that can be used to generate other specific profiles and 3934 addresses the content values that are required to support the SDD XML examples that also are published
- 3935 separately.
- 3936 The starter profile is not intended to be a complete vocabulary for all SDDs, but rather to illustrate the format and provide example content so that additional profiles can be generated in the future. The starter 3937 profile leverages and extends the CIM standard [CIM] for many content values, but other profiles MAY 3938 3939 use other content values.
- Other profiles MAY be published by the TC in the future, and new profiles can be created as specified in 3940 3941
- 3942 An implementation MAY claim conformance to one or more particular profiles.

5.3.1 Profile Creation

- 3944 The SDD TC has created a starter profile as described in 5.3. The SDD TC MAY create additional profiles 3945 in the future.
- 3946 Others MAY create SDD profiles for use cases, domains, or user communities that are not addressed by 3947 the currently available profiles from the SDD TC. When creating new profiles, it is RECOMMENDED that 3948 profile creators follow the model of the starter profile and any existing profiles and reuse content from
- existing standards where possible. It is also RECOMMENDED that implementations publish the profile(s) 3949

3950 that they support.

5.3.2 Profile Publication

3952 The SDD TC publishes the starter profile and MAY publish any other profiles created by the SDD TC.

- 3953 Profiles created by the SDD TC SHALL be made available by the SDD TC.
- 3954 Profiles created by others MAY be published and made available by those parties and/or submitted to the
- 3955 SDD TC for consideration for publication by the SDD TC, according to the OASIS policies and
- 3956 procedures, including intellectual property rights. The SDD TC MAY publish and make available the new
- 3957 profiles through majority vote of the TC.

3958 5.3.3 Profile Applicability

- 3959 Profiles are applicable to particular usage models, domains and/or user communities. An implementation
- 3960 MAY claim conformance to one or more particular profiles.

5.4 Compatibility Statements

- 3962 Versions of the specification use the version value defined in the schema Version attribute described in
- section 3.2. New versions of the specification MAY update the conformance level contents.
- 3964 Profiles also use the *schemaVersion* attribute described in section 3.2. New versions of profiles MAY
- 3965 update the profile contents.

3961

3977

3985

3988

3989

3990

3991

3992 3993

3994

3995 3996

- 3966 Minor version updates of the schema, specification and profiles SHALL be backward-compatible with
- proceeding major versions (for example, all "1.x" versions are backward-compatible with version "1.0").
- 3968 Moreover, minor version updates of the schema, specification and profiles SHALL be backward-
- 3969 compatible with proceeding minor versions of the same major version (for example, version "1.4" is
- 3970 backward-compatible with versions "1.3", "1.2", "1.1" and "1.0").
- 3971 Major version updates of the schema, specification and profiles are NOT REQUIRED to be backward-
- 3972 compatible with previous versions and MAY NOT be backward-compatible with previous versions. For
- example, if non-backward-compatible changes occur in version "1.x", the new version is "2.0". Although
- new major versions MAY have substantial backward compatibility, backward compatibility is not
- 3975 guaranteed for all aspects of the schema across major versions.

3976 **5.5 Conformance Clause**

5.5.1 Conformance for Users of This Specification

- 3978 An SDD conforms to this specification if it conforms to the SDD schema and follows the syntax and
- 3979 semantics defined in the normative portions of this specification. An SDD MAY conform to conformance
- 3980 levels CL1 or CL2.
- 3981 An implementation conforms to this specification if it conforms to, at minimum, conformance level CL1 of
- 3982 the SDD schema; supports at least one SDD profile; and follows the syntax and semantics defined in the
- 3983 normative portions of this specification. An implementation MAY support conformance levels CL1 or CL2
- 3984 and MAY support additional SDD profiles.

5.5.2 Conformance for This Specification Itself

This section is the conformance claim for how this document conforms to **[CONFORM]**. The conformance issues in section 8 of **[CONFORM]** apply to this document as follows:

- 1. This document is applicable to SDDs as defined in this specification. To claim conformance to this document, all the requirements in section 5.5.1 SHALL be met.
- This document MAY be implemented in its entirety or in defined conformance levels CL1 and CL2.
 This document does not define profiles, but the SDD TC MAY define profiles that MAY be implemented.
- This document allows extensions. Each implementation SHALL fully support all required functionality of the specification exactly as specified. The use of extensions SHALL NOT contradict nor cause the non-conformance of functionality defined in the specification.
- 4. This document contains no discretionary items.

3997 5. This document's normative language is English. Translation into other languages is permitted. 3998

A. Schema File List 3999 4000 The SDD schema is implemented by multiple schema files. Types defined in each file are identified by a 4001 specific namespace prefix, as indicated in the following list: 4002 cd04-sdd-common-1.0.xsd (prefix: sdd-common) 4003 Contains definitions of common types used in the SDD specification, including identity and fix-identity 4004 types, UUID and version types, and the display text type. 4005 http://docs.oasis-open.org/sdd/v1.0/cs01/CL1Schema/cs01-sdd-common-1.0.xsd 4006 http://docs.oasis-open.org/sdd/v1.0/cs01/FullSchema/cs01-sdd-common-1.0.xsd 4007 cd04-sdd-deploymentDescriptor-1.0.xsd (prefix: sdd-dd) 4008 Contains the deployment descriptor specification, including various content types. 4009 http://docs.oasis-open.org/sdd/v1.0/cs01/CL1Schema/cs01-sdd-deploymentDescriptor-1.0.xsd 4010 http://docs.oasis-open.org/sdd/v1.0/cs01/FullSchema/cs01-sdd-deploymentDescriptor-1.0.xsd 4011 cd04-sdd-packageDescriptor-1.0.xsd (prefix: sdd-pd) 4012 Contains the package descriptor specification, including types related to packages and files. 4013 http://docs.oasis-open.org/sdd/v1.0/cs01/CL1Schema/cs01-sdd-packageDescriptor-1.0.xsd 4014 http://docs.oasis-open.org/sdd/v1.0/cs01/FullSchema/cs01-sdd-packageDescriptor-1.0.xsd 4015 4016 Example SDDs showing the use of the schema can be found at the following address.

http://docs.oasis-open.org/sdd/v1.0/sdd-examples-v1.0.zip

4017

4018

B. Acknowledgements

4019

4051

4020 The following individuals have participated in the creation of this specification and are gratefully 4021 acknowledged: 4022 **Participants:** Dr. Howard Abrams, CA 4023 Mr. Joshua Allen, Macrovision Corporation 4024 4025 Mr. Rich Aquino, Macrovision Corporation 4026 Mr. Lazar Borissov, SAP AG 4027 Ms. Debra Danielson, CA 4028 Mr. Robert DeMason, SAS Institute, Inc. 4029 Mr. Robert Dickau, Macrovision Corporation Mr. Quenio dos Santos, Macrovision Corporation 4030 4031 Mrs. Christine Draper, IBM Mr. Adrian Dunston, SAS Institute, Inc. 4032 4033 Mr. James Falkner. Sun Microsystems 4034 Mr. Keisuke Fukui, Fujitsu Limited Mr. Randy George, IBM 4035 Mr. Nico Groh, SAP AG 4036 Mr. Frank Heine, SAP AG 4037 4038 Ms. Merri Jensen, SAS Institute, Inc. 4039 Dr. Hiro Kishimoto, Fujitsu Limited 4040 Mr. Thomas Klink, SAP AG Mr. Jason Losh, SAS Institute, Inc. 4041 4042 Ms. Julia McCarthy, IBM 4043 Mr. Art Middlekauff, Macrovision Corporation 4044 Mr. Brent Miller. IBM 4045 Mr. Ed Overton, SAS Institute, Inc. Mr. Chris Robsahm, SAP AG 4046 Dr. David Snelling, Fuiltsu Limited 4047 Mr. Thomas Studwell, Dell 4048 Dr. Weijia (John) Zhang, Dell 4049 4050

sdd-spec-v1.0-os.doc Copyright © OASIS® 2007, 2008. All Rights Reserved.